





FLOOR PLAN
SCALE 1:100

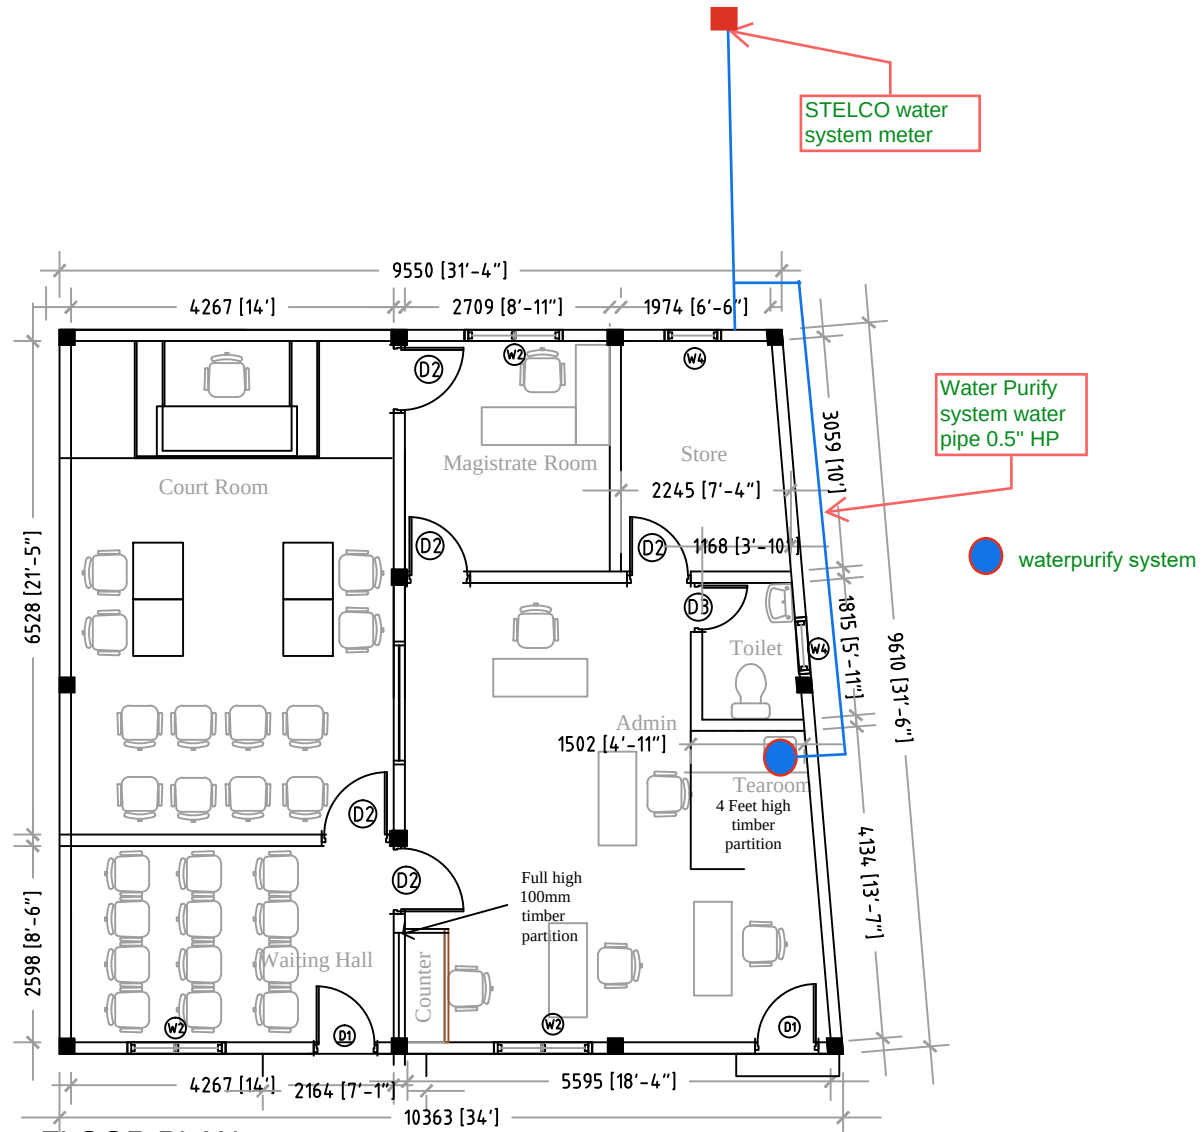

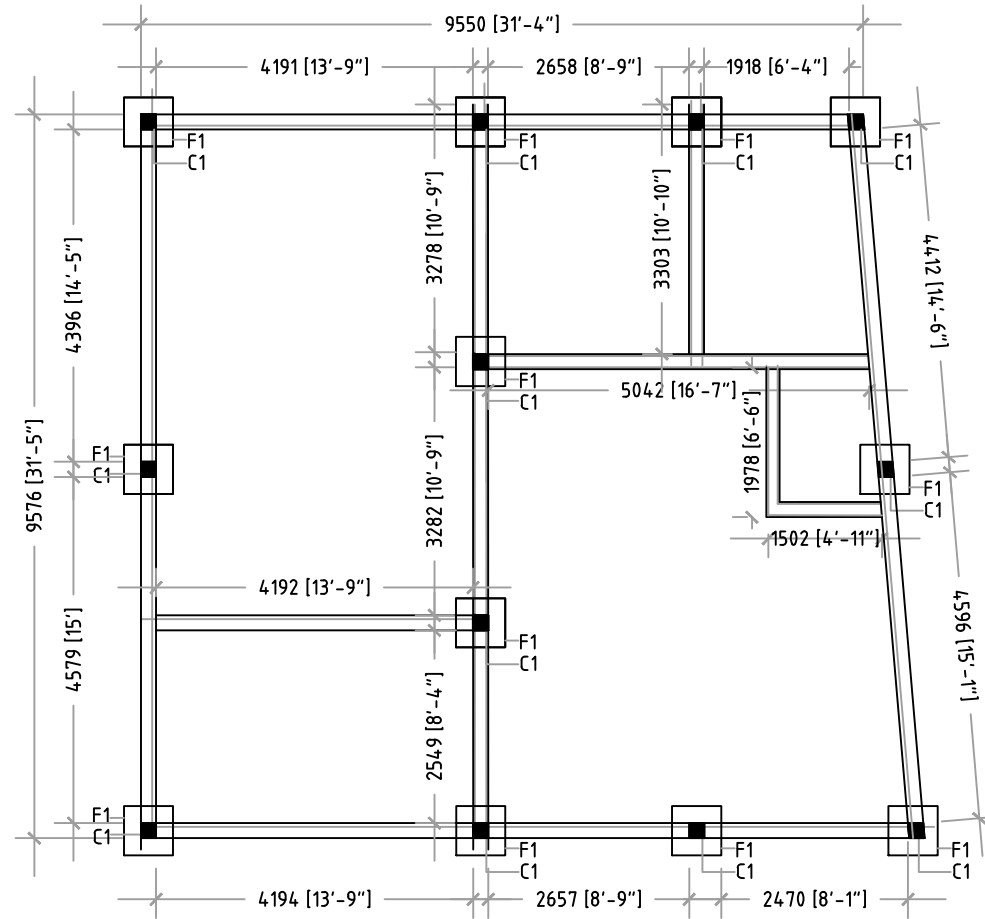


FOUNDATION PLAN / COLUMN LAYOUT


SCALE 1:100

FOOTING PAD DETAILS

FOOTING	SIZE	REINFORCEMENT
F1	650 x 650 x 140	T12@140 BW AT BOT -USE COGS

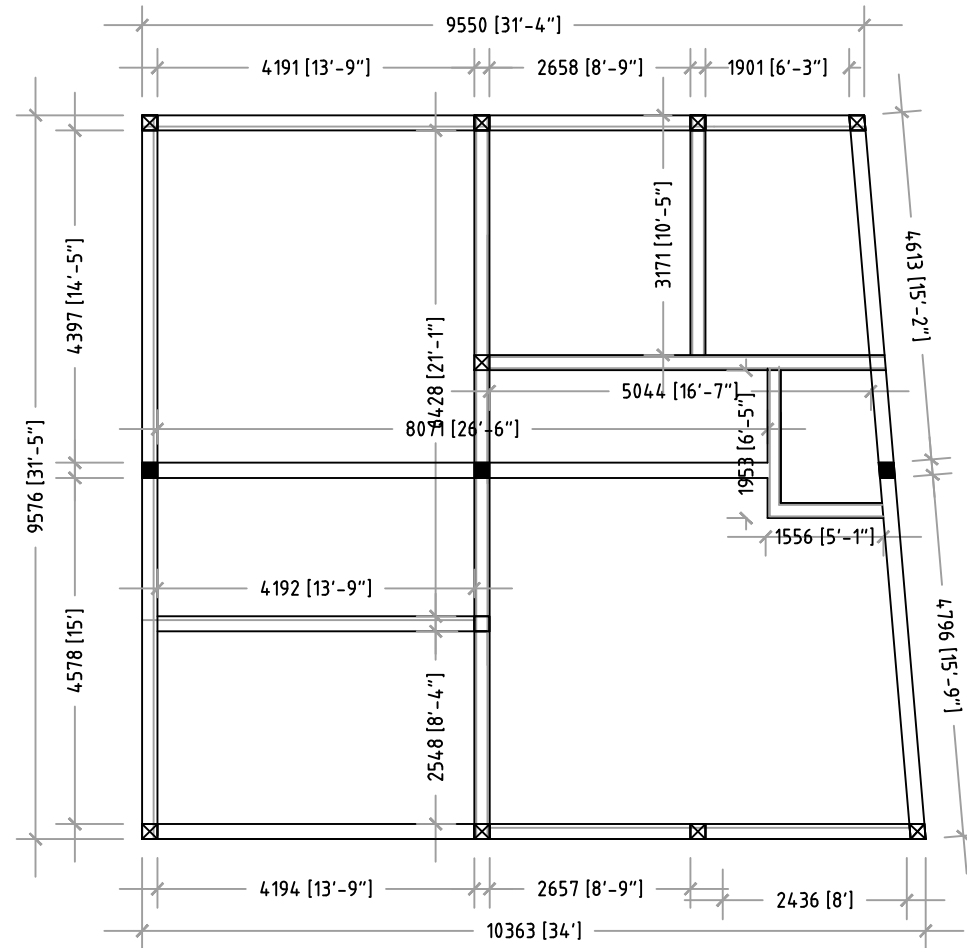

ROOFBEAM LAYOUT
SCALE 1:100

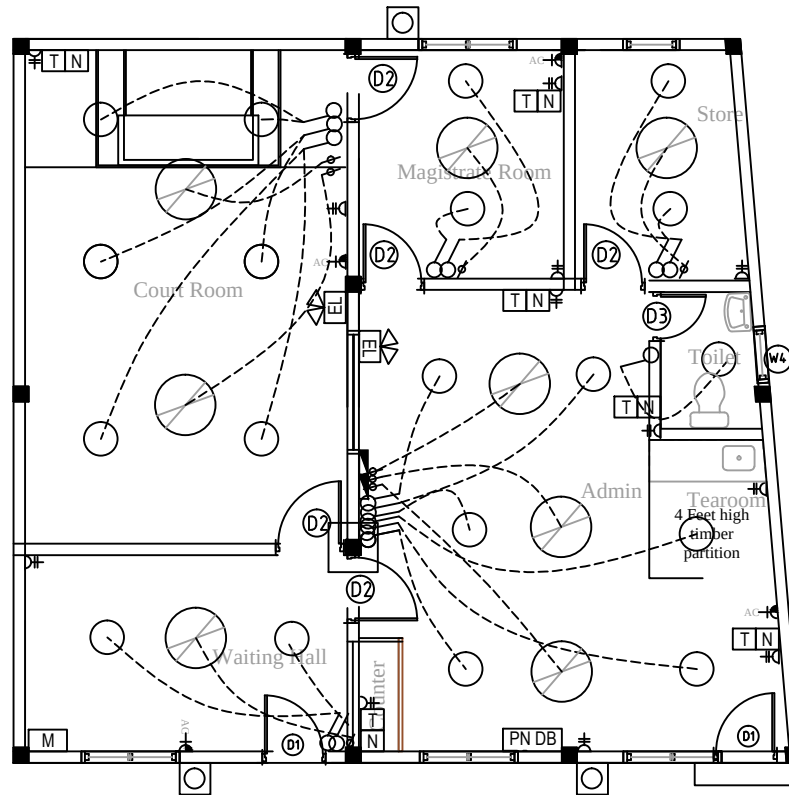

ELECTRICAL LAYOUT
SCALE 1:100

- LEGEND**
-  FAN
 -  2x13A SOCKET OUTLET(WALL MOUNTED)
 -  15A AC SOCKET OUTLET
 -  NON-MAINTAINED WALL MOUNTED EMERGENCY LIGHT WITH 2HR BATTERY PACK
 -  TELEPHONE
 -  NETWORK
 -  ELECTRIC METER
 -  D-BOARD
 -  CEILING MOUNT LIGHT (WITH 40W ENERGY SAVE LIGHT)
 -  ONE-WAY SWITCH
 -  Energy Saving Outdoor Light (wall-mount)
 -  FAN DIMMER SWITCH
 -  TELEPHONE NETWORK D-BOARD

TIMBER PURLIN 50X38
 TIMBER RAFTER 50X125
 ANCHOR BOLTS
 NOTE: PROVIDE ANCHORAGE AT ALL
 OTHER RAFTER - RC BEAM JOINTS
 LYSAGHT GUTTER 200X150
 38X200 TIMBER FACIA BOARD
 R.C ROOF BEAM

GYPSUM BOARD CEILING FIXED TO
 TIMBER FRAME

110mm THK. BLOCK WALL WITH 20mm PLASTER ON
 BOTH SIDES AND FINISH WITH PAINT

CONCRETE 75mm THK.
 500
 DMP
 GROUND LEVEL
 R.C BEAM
 REFFER DETAIL
 500
 R.C PAD FOOTING
 FOOTING LEVEL

DETAIL -A
 SCALE 1:30

LYSAGHT RIDGE PLATE
 LYSAGHT RIDGE PLATE
 50 X 38 PURLINS @ 600 C/C
 LYSAGHT ROOFING SHEETS
 50X175 WALL PLATE
 COLUMN
 THREADED BOLTING ROD
 @ 1.2M C/C
 ROOF BEAM
 NOTE: PROVIDE ANCHORAGE AT ALL
 OTHER RAFTER - RC BEAM JOINTS

DETAIL -B
 SCALE 1:30

200
 200
 200
 2T12
 B6@150
 2T12
 FB

200
 200
 200
 2T12
 B6@150
 2T12
 C1

200
 200
 200
 2T12
 R6@150
 2T12
 RB1

T12@150 C/C BW
 200
 600
 LEAN CONCRETE
 FOOTING DETAIL
 SCALE 1:30

FFL				
SPEC	Glazing	6mm tintin glass with 6mm thik grill	treated timber	PVC
	Frame	Aluminium	timber frame	PVC
SIZE		964 x 2640	862 x 2640	650 x 2180
QUANTITY		02	05	01

DOOR SCHEDULE

SCALE 1:75

FFL			
SPEC	Glazing	6mm tintin glass with 6mm thik grill	6mm tintin glass with 6mm thik grill
	Frame	Aluminium	Aluminium
SIZE		1300 x 1810	750 x 460
QUANTITY		03	02

DOOR SCHEDULE

