




S.No	Item Description	Pack size	Sample Technical specification	BRAND	Quantity Required	UNIT	Sample Picture
<b>INSTRUMENTS</b>							
1	LED intra oral camera with LCD monitor and dental mount holder	1 X 1	<ul style="list-style-type: none"> <li>• intraoral: CCD 2,000,000, 8pcs LED light.</li> <li>• Screen size: 15 Inch</li> <li>• Accessories: Wireless KYBD/Mouse,Mount/Arm</li> <li>• auto focus:5-50mm,the length of line: 2M</li> <li>• LCD :freezing function and 1/4 separate frames , definition: 1280*1024</li> <li>• memory: 28-112pcs pictures for handle</li> <li>• LCD:17"-19"</li> <li>• functions: take high definition oral pictures, managing the records ,communication between doctors with patients,music</li> <li>• interface: VGA+USB+HDMI+AV+telecontroller+USB</li> </ul>		1	NOS	
2	IOPA xray (portable) with digital detector	1 X 1	<ul style="list-style-type: none"> <li>• Digital timer accuracy of: 0.01 Sec ( 0.01 Sec. — 4.00 Sec. )</li> <li>• output of: 70Kv, 10mA(700VA)</li> <li>• Voltage: 190VAC — 250VAC</li> <li>• Film speed selection switches ( 3 speeds )</li> <li>• High voltage protection for the X-Ray Tube</li> <li>• Audible &amp; Visual indication of " X-Ray On " ( Radiation indications)</li> <li>• RVG mode for RVG sensor</li> <li>• Portable</li> </ul>		1	NOS	
3	Headlight		<p><b>Specifications for the Headlight:</b></p> <ul style="list-style-type: none"> <li>• Illumination Up to 50,000 Lux at a working distance of 250 mm</li> <li>• Color Temperature 4,500 Kelvin</li> <li>• LED Operating Life Up to 50,000 hours</li> <li>• Spot Adjustment 30 mm to 80 mm at 420 mm working distance</li> <li>• Angle of Declination Stepless and individually adjustable for every examination</li> <li>• Rheostat Headband-mounted</li> </ul> <p><b>Specifications for the Portable Power Pack:</b></p> <ul style="list-style-type: none"> <li>• Portable power pack. Does not tie the user to desk, wall or static power supplies.</li> <li>• Li-ion Technology. Triple capacity compared with current NiCd systems. No memory effect, autonomy for 8.5 hours of continuous ON time at full power.</li> <li>• Fast Charge. Charges to full capacity in 2 hours.</li> <li>• Charge Status Display. Always lets you know how much operating charge you have left.</li> <li>• Stepless light intensity control. Optimum brightness setting prevents reflexes.</li> <li>• Flexible Charging Options: EN 50 Desk and wall charger, or plug-in transformer.</li> <li>• Intelligent. Can be used as mains power supply even while in "charge" mode.</li> <li>• 100 - 240 V Compatible Transformer incl. 4 plugs for world wide compatibility.</li> </ul>		1	NOS	

SECTION 1 EQUIPMENT

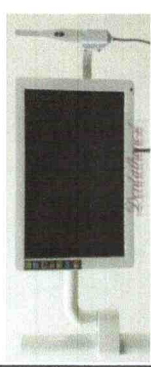

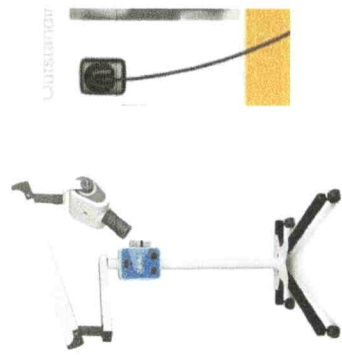