

بِسْمِ اللّٰهِ الرَّحْمٰنِ الرَّحِیْمِ

Information Technology Division


Ministry of Health

ދިވެހިރާއްޖޭގެ ސަރުކާރުގެ ގެޒެޓް ގައި ބަޔާންކޮށްފައިވާ ގޮތުގައި
ސިއްހަތުގެ ވަޑައިގަންނަވާ މިނިސްޓްރީގެ ދަށުން

Specification for 3KVA UPS

DETAILS	3000VA (minimum) WITH AUTOMATIC VOLTAGE REGULATOR
OUTPUT VOLTAGE	220V, 230V (nominal), 240V
VOLTAGE DISTORTION FOR OUTPUT	Less than or equal to 5%
OUTPUT CONNECTION QUANTITY	Four (4) IEC 320 C13 (Minimum) One (1) IEC 320 C19
INPUT VOLTAGE	230V
INPUT CONNECTION TYPE	British BS1363A
BATTERY CONDITION	Leakproof
REPLACEMENT BATTERY COST	Should include current market price for the replacement battery
INTERFACE PORTS	One (1) RJ-45, One (1) Smart slot or equivalent interface port
AUDIBLE ALARM	Alarm when on battery Alarm when low battery Alarm when overload
REQUIRED FEATURES	Surge protection and Noise filtering Include Emergency Power Off feature LED Display with load and Status
WARRANTY	One-year hardware and TWO years' service warranty One-year Guarantee for Battery (provide replacement if battery life ends earlier than one year)




Aminath Sakha Saleem
Computer Technician
08 November 2020

بِسْمِ اللّٰهِ الرَّحْمٰنِ الرَّحِیْمِ


Information Technology Division

Ministry of Health

دائرة تكنولوجية المعلومات
وزارة الصحة
جمهورية مصر العربية

Specification for 8KVA UPS

DETAILS	8KVA (Minimum) WITH AUTOMATIC VOLTAGE REGULATOR
FORM FACTOR	Rack mountable
OUTPUT VOLTAGE	220V, 230V (nominal), 240V
VOLTAGE DISTORTION FOR OUTPUT	Less than or equal to 5%
OUTPUT CONNECTION QUANTITY	Eight (8) IEC 320 C13 One (1) IEC 320 C19
INPUT VOLTAGE	220/230/240 V
INPUT CONNECTION TYPE	British BS1363A
BATTERY CONDITION	Leakproof
REPLACEMENT BATTERY COST	Should include current market price for the replacement battery
INTERFACE PORTS	One (1) RJ-45, One (1) Smart slot or equivalent interface port
AUDIBLE ALARM	Alarm when on battery Alarm when low battery Alarm when overload
REQUIRED FEATURES	Surge protection and Noise filtering Include Emergency Power Off feature LED Display with load and Status
WARRANTY	One-year hardware and TWO years' service warranty One-year Guarantee for Battery (provide replacement if battery life ends earlier than one year)

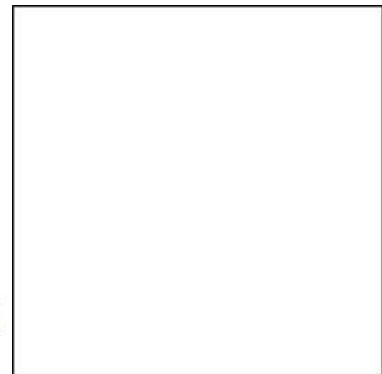

بِسْمِ اللّٰهِ الرَّحْمٰنِ الرَّحِیْمِ


Information Technology Division

Ministry of Health

الجمهوریة العربیة السوریة
الجمهورية العربية السورية
جمهورية سوريا العربية

Specification for 24 Port Manageable Switch

INTERFACES	24 x 1Gb RJ-45 Ports 2 SFP + Ports
FEATURES	VLAN routing Rack-mountable



بِسْمِ اللّٰهِ الرَّحْمٰنِ الرَّحِیْمِ


Information Technology Division

Ministry of Health

اِسْمُ اللّٰهِ الرَّحْمٰنِ الرَّحِیْمِ
دِیوِیْنِ اِسْمِ اللّٰهِ الرَّحْمٰنِ الرَّحِیْمِ

Specification for Cable Roll Box

Description	CAT6 UTP / 23 AWG solid 300 m (minimum)
--------------------	---



بِسْمِ اللّٰهِ الرَّحْمٰنِ الرَّحِیْمِ


Information Technology Division

Ministry of Health

ދިވެހިރާއްޖޭގެ ސުލޯބީގެ ސިޓީ ގެ ދަށުން
މި ސަބަބަށް ތަޢާރުކޮށް

Specification for Network Accessories

Jack	
Features	RJ-45 CAT6
Quantity	500
Keystone	
Features	RJ-45 CAT6
Quantity	100
Faceplate	
Features	2 Ports RJ-45 CAT6
Quantity	50

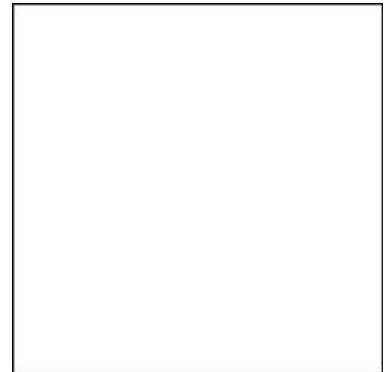

بِسْمِ اللّٰهِ الرَّحْمٰنِ الرَّحِیْمِ


Information Technology Division

Ministry of Health

دائرة تكنولوجية المعلومات
وزارة الصحة
جمهورية مالديف

Specification for Network Toolkit

Details	
Multifunction crimper	
Features	<ul style="list-style-type: none">4/6/8P Crimping tool with ratchet design or equivalent to proskit CP376TR
Cable Cutter Stripper	
Features	<ul style="list-style-type: none">UTP/STP cable strippingElectrical wire cutter
Cable tester	Equivalent to Proskit MT-7057
Features	<ul style="list-style-type: none">Tests 4 types of cables: RJ-11/-45/USB/BNCSimple one-button test600 ft. test distanceLEDs indicate connections and faults
Screwdriver	<ul style="list-style-type: none">Cross-head screwdriver (3.2x100mm) [Steel Material] 1 x 2mm 1 x 4mm 1 x 6mmStraight-head screwdriver (3.2x100mm) [Steel Material] 1 x 2mm 1 x 4mm 1 x 6mm



بِسْمِ اللّٰهِ الرَّحْمٰنِ الرَّحِیْمِ

Information Technology Division

Ministry of Health

ދިވެހިރާއްޖޭގެ ސަރުކާރުގެ ގެޒެޓް ގައި ބަޔާންކޮށްފައިވާ ގޮތުގައި
ސިއްހަތުގެ މިނިސްޓްރީގެ ފަރާތުން

Specification for Server

DRIVE BAYS	UP TO 16 x 2.5" SAS/SATA HARD DRIVES FOR 2CPU CONFIGURATION
PROCESSOR	2 x INTEL® XEON® SILVER 4210 2.2G, 10C/20T, 13.75M CACHE, TURBO, (85W)
MEMORY	64GB RDIMM, 2666MT/s, DUAL RANK, x4 DATA WIDTH
RAID CONTROLLER	RAID 1 FOR SSD, RAID 50 FOR HDD, 8GB NV CACHE (MINIMUM)
STORAGE	SSD 2 x 480GB SOLID STATE DRIVE SATA 6GBPS 2.5" HOT-PLUG - HDD 8 x 2.4TB 10K SAS 12GBPS 2.5" HOT-PLUG
NETWORK	INTEGRATED QUAD PORT GIGABIT ETHERNET
RACK RAILS	SERVER RACK RAILS, CABLE MANAGER
POWER SUPPLY	DUAL POWER SUPPLY, REDUNDANT CONFIGURATION, 750W
POWER CORDS	C13 TO C14, PDU STYLE, 12 AMP, 1M POWER CORD
BEZEL	INCLUDE BEZEL
OPERATING SYSTEM	GENUINE WINDOWS SERVER® 2019, DATACENTER EDITION WITH UNLIMITED VIRTUAL MACHINE LICENSE (10 x 2 CORE PACK)
WARRANTY	3 YEARS PARTS / 3 YEARS' SERVICE WARRANTY

