


LED Light JNR PANEL 8965 (JNR-8145B)



JNR PANEL 8965

■ JNR-8145B

JNR PANEL 8965 adopts 896 pcs premium quality and high CRI 5mm LEDs(cool white+warm white) which features high brightness and stability. It is made of a new type of high temperature strength of cast aluminum casing with nice outlook. The fixture is designed and manufactured strictly following CE standards, complying with international standard DMX512 protocol. It's available independently controlled and linkable with each other for operation. And it is applicable for large-scale live performances, theater, studio, nightclubs and discos.


Specification

- ※ Input Voltage: AC90-260V 50/60Hz
- ※ LED Quantities: 896 pcs premium quality and high CRI 5mm LEDs(cool white+warm white)
- ※ Control Signal: DMX512, master-slave and sound activated or auto operation
- ※ Control Channel: 2/5 DMX channels USITT DMX-512
- ※ Power Consumption: 54W
- ※ Dimensions: 40(D)*300(W)*300(H)mm
- ※ Packing Dimensions: 375(D)*900(W)*425(H)mm (6 pcs)
- ※ Net Weight: 1.85kg
- ※ Gross Weight: 4kg

Detail


- ※ 896 Pcs premium quality and high CRI 5mm LEDs (cool white and warm white), 50,000 hours
- ※ Accurate color temperatures tunable from 3200K to 5600K
- ※ Color Rendering Index(CRI): Ra > 80
- ※ High efficiency lens
- ※ Flat and even projection with soft edge
- ※ High intensity, long throw and 45° wide field angle
- ※ Housing made by rugged, die cast aluminum alloy
- ※ Thermally insulated knobs and single aluminum handle for installing
- ※ Barn door included
- ※ Tripod stand as optional
- ※ Tour bag as optional
- ※ Superior free noise thermal cooling system
- ※ 0-100% Smooth and precise linear dimmer
- ※ 2 individual dimmer knobs to adjust color temperatures
- ※ No noticeable color shift throughout the entire range
- ※ Flicker-free at any frame rate or shutter angle
- ※ 25T/sec high speed shutter/strobe effect with variable pulse
- ※ Preset variable/random strobe and dimming pulse effect
- ※ DMX512, master-slave, and sound control or auto operation
- ※ 2/5 DMX channels USITT DMX-512

- ※ 4-Button LCD display
- ※ Durable, industry standard 3-pin XLR locking power connector
- ※ 12V DC power adapter included
- ※ Power switch available
- ※ 3-pin connectors IN/OUT
- ※ -35-45°C Max ambient temperature
- ※ IP20




1.85kg

Light Output (FC=LUX × 0.0628)

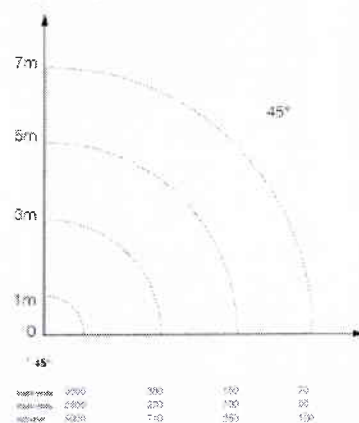

Light JNR FRESNEL 300AZ-C (JNR-8143A)



JNR FRESNEL 300AZ-C

■ JNR-8143A

JNR FRESNEL 300AZ-C adopts 300W COB LED(available for cool white) which features high brightness and stability. It is made of a new type of high temperature strength of cast aluminum casing with nice outlook. The fixture is designed and manufactured strictly following CE standards, complying with international standard DMX512 protocol. It's available independently controlled and linkable with each other for operation. And JNR FRESNEL 300AZ-C is applicable for large-scale live performances, theater, studio, nightclubs and discos.


Specification

- ※ Input Voltage: AC90-260V 50/60Hz
- ※ LED Quantities: 300W COB LED(available for cool white)
- ※ Control Signal: DMX512, master-slave and sound activated or auto operation
- ※ Control Channel: 2/5 DMX channels USITT DMX-512
- ※ Power Consumption: 390W
- ※ Dimensions: 580(D)*320(W)*320(H)mm
- ※ Packing Dimensions: 600(D)*480(W)*480(H)mm
- ※ Net Weight: 9.5kg
- ※ Gross Weight: 11.5kg

Detail


- ※ 300W COB LED(available for cool white), 50,000 hours
- ※ Color Rendering Index(CRI): Ra >92
- ※ High efficiency fresnel lens
- ※ Flat and even spot image with soft edge
- ※ Automatic zoom system from 15°-50°
- ※ Housing made by rugged, die cast aluminum alloy
- ※ Thermally insulated rear handle
- ※ Thermally insulated knobs and single aluminum handle for installing
- ※ Barn door included
- ※ Color frame as optional
- ※ 0-100% Smooth and precise linear dimmer
- ※ 25T/sec high speed shutter/strobe effect with variable speed
- ※ Preset variable/random strobe and dimming pulse effect
- ※ DMX512, master-slave, and sound control or auto operation
- ※ 2/5 DMX channels USITT DMX-512
- ※ 4-Button LCD display
- ※ Powercon connector IN/OUT
- ※ Power switch available with fuse
- ※ 3-Pin and 5-pin XLR connectors IN/OUT
- ※ Low noise fan integrated with copper liquid cooling system
- ※ -35~45°C Max ambient temperature

- ※ IP20
- ※ 1" Safety attachment point



9.5kg

Light Output (FC=LUX × 0.0029)

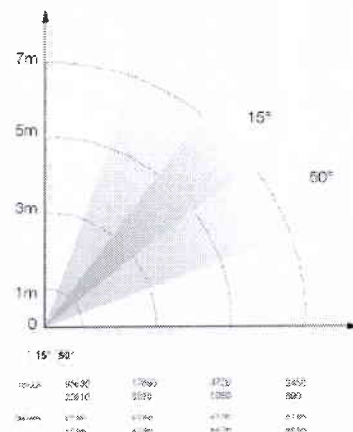


Light JNR Ellipsoidal 200C (JNR-8141C)

JNR ELLIPSOIDAL 200 C JNR-8141C

FEATURES & SPECIFICATIONS

Features

- 1*200W COB LEDs (Cool White)
- 50,000 hours life span and low power consumption
- Color Rendering Index(CRI): Ra≥95
- Optimized high definition optical system for improved photometric performance and field uniformity
- Projector-quality, high contrast aspheric lens
- Glass reflector that removes greater than 90% infrared radiation (heat) and reflects greater than 95% of visible light
- Lens tube interchangeable with filed angles available for 19°/26°/36°
- Flat and even spot image
- Smooth manual focus system
- Beam edge continually adjustable hard-to-soft
- Housing made by high intensity fireproof black ABS
- Thermally insulated rear handle
- Thermally insulated knobs and single aluminum handle for installing
- 3 Metal spot cutting slots
- Barn door included
- Glass/Metal gobo slot as optional
- Color frame as optional
- Manual IRIS system as optional
- 0-100% Smooth and precise linear dimmer
- 25T/sec high speed shutter/strobe effect with variable speed
- Preset variable/random strobe and dimming pulse effect
- 1/3 DMX channels USITT DMX-512
- DMX512 master-slave and sound control or auto operation
- 4-Button LCD display
- POWRECON connector IN/OUT
- 3-Pin XLR connectors IN/OUT
- Low noise fan integrated with copper liquid cooling system
- -35~45°C Max ambient temperature
- IP20 protection rating
- 1* Safety attachment point

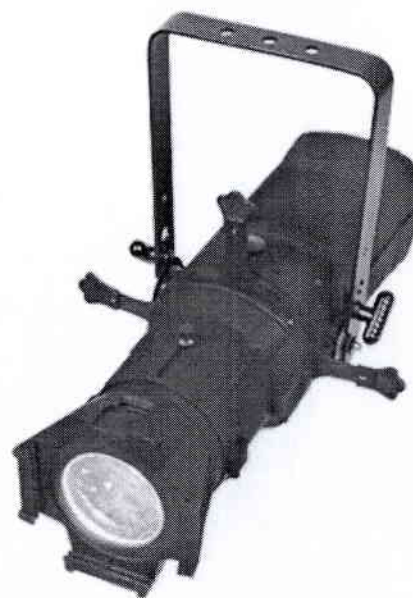

Specifications

Input Voltage: AC90-260V 50/60Hz

LED Quantities: 1*200W COB LEDs (Cool White)

Control Signal: DMX512, master-slave and sound activated or auto operation

Control Channel: 1/3 DMX channels USITT DMX-512


Power Consumption: 260W

Dimensions: 636(D)*186(W)*394(H)mm

Packing List: 325(D)*680(W)*330(H)mm

Net Weight: 6.25kg

Gross Weight: 8kg

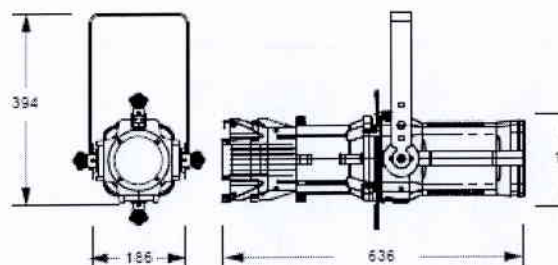

Light JNR Minifresnel 100MZ-C (JNR-8178B)



JNR MINIFRESNEL 100MZ-C

■ JNR-8178B

JNR MINIFRESNEL 100MZ-C adopts 100W cool white COB LED which features high brightness and stability. It is made of a new type of high temperature strength of cast aluminum casing with nice outlook. The fixture is designed and manufactured strictly following CE standards, complying with international standard DMX512 protocol. It's available independently controlled and linkable with each other for operation. And JNR MINIFRESNEL 100MZ-C is applicable for large-scale live performances, theater, studio, nightclubs and discos.


Specification

- Input Voltage: AC90-260V 50/60Hz
- LED Quantities: 100W COB LED(cool white)
- Control Signal: DMX512, master-slave and sound activated or auto operation
- Control Channel: 1/2 DMX channels USITT DMX-512
- Power Consumption: 130W
- Dimensions: 560(D)*564(W)*528(H)mm
- Packing Dimensions: 320(D)*365(W)*320(H)mm
- Net Weight: 5kg
- Gross Weight: 6.5kg


Detail

- 100W COB LED(cool white), 50,000 hours
- Color Rendering Index(CRI): Ra>90
- High efficiency fresnel lens
- Flat and even spot image with soft edge
- Manual zoom system from 15°-50°
- Housing made by rugged, die cast aluminum alloy
- Thermally insulated rear handle
- Thermally insulated knobs and single aluminum handle for installing
- Barn door included
- Color frame as optional
- 0-100% Smooth and precise linear dimmer
- Two dimmer modes available
- 25T/sec high speed shutter/strobe effect with variable speed
- Preset variable/random strobe and dimming pulse effect
- DMX512, master-slave, and sound control or auto operation
- 1/2 DMX channels USITT DMX-512
- 4-Button LCD display
- Powercon connector IN/OUT
- Power switch available with fuse
- 3-Pin XLR connectors IN/OUT
- Low noise fan integrated with copper liquid cooling system
- +20-45℃ Max ambient temperature

- IP20
- 1" Safety attachment point




Light Output @C=11.1X x C0.9220

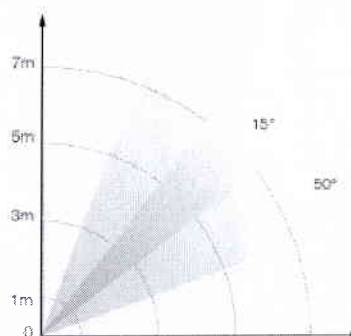

15°	50°				
100.0	201.41	100%	100%	100%	100%
100.0	100.71	100%	100%	100%	100%
100.0	50.35	100%	100%	100%	100%
100.0	25.18	100%	100%	100%	100%
100.0	12.59	100%	100%	100%	100%
100.0	6.29	100%	100%	100%	100%

5KG

Light JNR Ellipsoidal 200ZD (JNR-8142G)



JNR ELLIPSOIDAL 200ZD

■ JNR-8142G

JNR ELLIPSOIDAL 200ZD adopts 200W COB LED(available for pure white and warm white) which features high brightness and stability. It is made of a new type of high temperature strength of cast aluminum casing with nice outlook. The fixture is designed and manufactured strictly following CE standards, complying with international standard DMX512 protocol. It's available independently controlled and linkable with each other for operation. And it is applicable for large-scale live performances, theater, studio, night-clubs and discos.

Specification



- Input Voltage: AC90-260V 50/60Hz
- LED Quantities: 200W COB LED(available for pure white and warm white)
- Control Signal: DMX512, master-slave and sound activated or auto operation
- Control Channel: 2/5 DMX channels USITT DMX-512
- Power Consumption: 260W
- Dimensions: 195(D)*720(W)*415(H)mm
- Packing Dimensions: 332(D)*832(W)*345(H)mm
- Net Weight: 10.2kg
- Gross Weight: 12.2kg

Detail

- 200W COB LED(available for pure white and warm white), 50,000 hours
- Color Rendering Index(CRI): Ra > 95
- Optimized high definition optical system for improved photometric performance and field uniformity
- Projector-quality, high contrast aspheric lens
- Glass reflector that removes greater than 90% infrared radiation (heat) and reflects greater than 95% of visible light
- Manual zoom system from 15°-36°
- Flat and even spot image
- Smooth manual focus system
- Beam edge continually adjustable hard-to-soft
- Housing made by rugged, die cast aluminum alloy
- Thermally insulated rear handle
- Thermally insulated knobs and single aluminum handle for installing
- 3 Metal spot cutting slots
- Barn door included
- Glass/Metal gobo slot as optional
- Color frame as optional
- Manual IRIS system as optional
- 0-100% Smooth and precise linear dimmer
- 25T/sec high speed shutter/strobe effect with variable speed
- Preset variable/random strobe and dimming pulse effect


- DMX512, master-slave, and sound control or auto operation
- 2/5 DMX channels USITT DMX-512
- 4-Button LCD display
- Powercon connector IN/OUT
- Power switch available with fuse
- 3-Pin and 5-pin XLR connectors IN/OUT
- Low noise fan integrated with copper liquid cooling system
- -35-45°C Max ambient temperature
- IP20
- 1" Safety attachment point

Light Output (FO-L16 x 0.0029)

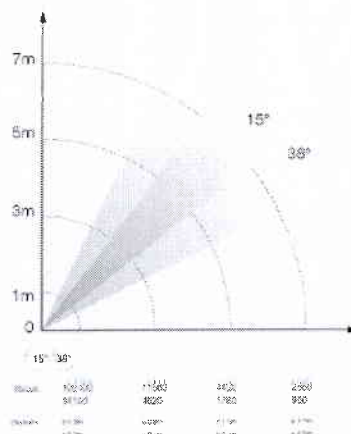

10.2KG

Light JNR Mini Ellipsoidal 20C/W (JNR-8168A/B)



JNR MINI ELLIPSOIDAL 20C/W

■ JNR-8168A/B

JNR ELLIPSOIDAL 20C/W adopts 20W COB LED (cool white/warm white) which features high brightness and stability. It is made of a new type of high temperature strength of cast aluminum casing with nice outlook. The fixture is designed and manufactured strictly following CE standards, complying with international standard DMX512 protocol. It's available independently controlled and linkable with each other for operation. And JNR ELLIPSOIDAL 20C/W is applicable for large-scale live performances, theater, studio, nightclubs and discos.

Specification




- Input Voltage: AC90~260V 50/60Hz
- LED Quantities:
 - JNR-8168A: 20W CITIZEN COB LED(cool white)
 - JNR-8168B: 20W CITIZEN COB LED(warm white)
- Control Signal: DMX512, master-slave and sound activated or auto operation
- Control: Remote controller
- Power Consumption: 20W
- Dimensions: 250(D)*170(W)*110(H)mm
- Packing Dimensions: 360(D)*180(W)*160(H)mm
- Net Weight: 1.12kg
- Gross Weight: 1.50kg

Detail

- 20W CITIZEN COB LED (cool white/warm white), 50,000 hours
- Color Rendering Index(CRI): Ra > 80
- Optimized high definition optical system for improved photometric performance and field uniformity
- Projector-quality, high contrast aspheric lens
- Glass reflector that removes greater than 90% infrared radiation (heat) and reflects greater than 95% of visible light
- Lens tube interchangeable with filed angles optional for 10°/26°/35°/50°
- Flat and even hard edge spot image
- Smooth manual focus system
- Beam edge continually adjustable hard-to-soft
- Housing made by die-cast aluminum
- Thermally insulated knobs and dual aluminum handle for installing
- 3 Metal spot cutting slots
- Glass/Metal gobo slot as optional
- Color frame as optional
- Manual IRIS system as optional
- 0-100% Smooth and precise linear dimmer
- 25T/sec high speed shutter/strobe effect with variable speed
- Preset variable/random strobe and dimming pulse effect
- Remote controller for different operation functions

- External full range power supply
- Noise free conventional cooling with housing
- -35°C ~45°C Max ambient temperature
- IP20
- Portable (mini C-clamp), canopy-mount and track-mount versions as optional

Light Output (FC=LUK × 0.0029)

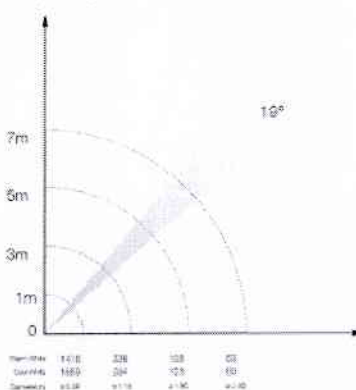


1.12KG

JNR DMX Splitter 1in8



- Each uses a separate power supply, optical isolation, voltage 2500V between the brightest, truly independent output, greatly improve the anti-jamming capability, and to protect the safety of the device
- On any standard DMX512 signal can be amplified
- Optical isolation to protect the console from external power supply voltage or surge voltage shock and damage
- Each amplifier has a set of standard DMX512 signal input. A straight-through output signals, 8 opto-isolated output, and have input and output instructions
- The power switch, and indicator lights
- Fuse holder, 1A
- The power input
- DMX IN signal input and line output (with signal lights flashing)
- DMX OUT1-8 represents 4 isolated outputs (with signal lights flashing)
- Signal Tower: a signal, the two signals -, 3 signal +
- DMX512 signal input connector DMX IN stick holder, stick holder by the DMX OUT output
- Each output port can be connected with up to 64 DMX loads

CO-Z 192 DMX 512 Stage Light Controller

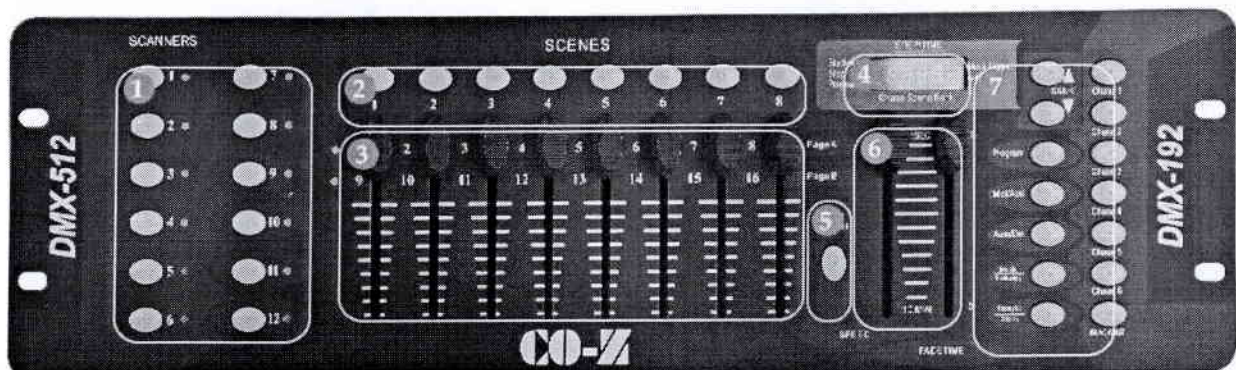

About CO-Z Stage Lights Controller

- Intelligent lighting is a perfect way to make any DJ set or musical performance look as good as it sounds. To achieve that, you need the CO-Z DMX controller. With a maximum of 16 channels and hundreds of groups for you to choose from, it's the essential DJ equipment that takes your production to the next level. Don't delay, get yours today - to make your next event shine bright with CO-Z light!

Specifications:

Input voltage: AC100-130V, 50-60HZ

Total channel number: 192 groups

Max controlled channels: 16CHs

Max procedure step: 40 steps

Scene pause time: 1-25.5 second/step

Scene graduation speed: 0.1-25.5 second

Display monitor: LED

DMX12 output interface 3 core XLR needle

Package includes:

1x 192 DMX512 Controller

1x User Manual


Event Lighting CLAMPT50 Aluminum Trigger Clamp for 38-51mm Tube



Features

- Pipe size: 38 - 51mm tube,
- Width: 30mm
- SWL: 150Kg
- Colour: Black anodized
- Material: Aluminum 6061-T6
- Bolt: M12 x 30

Godox 110cm 43" 2 in 1 Collapsible Light Reflector (Gold & Silver)

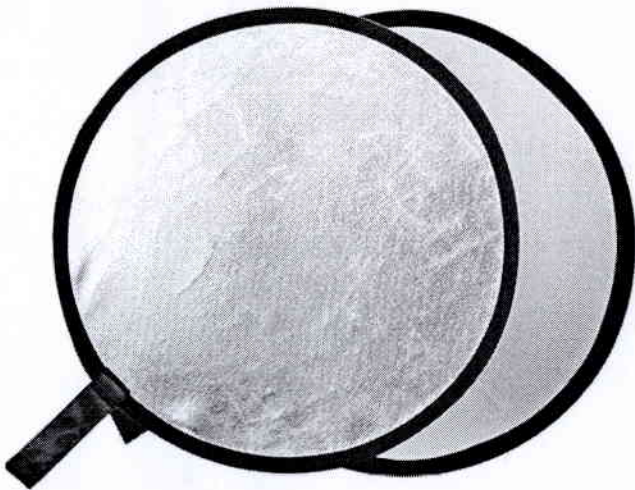

Product description

This silver/gold reflector disc is suitable for accenting small areas of a portrait, and very small still-life setups. It folds down to 1/3 of its open size, and comes with a storage sleeve

Shape: Round

Flexible and lightweight design allow easy portability


Size open: 43" Diameter

Size collapsed: 16" Diameter

Convenient zipped round carrying bag

Durable and flexible steel spring frame

Canare L-4E6S Star Quad Microphone Cable 200m

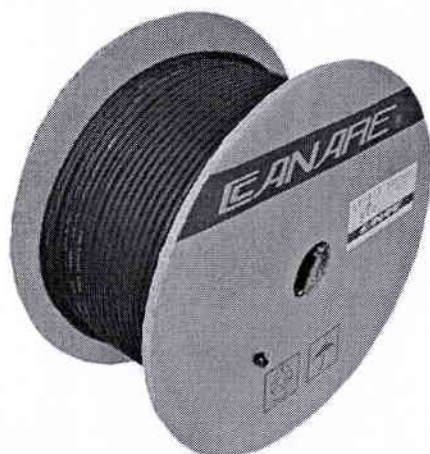

Applications	Microphones, portable applications, audio rack wiring, PA systems, and audio patch cords
Outer Diameter	0.2" / 6 mm, nominal
PVC Jacket Thickness	0.04" / 1.1 mm, nominal
Number of Conductors	4 (2 blue and 2 white)
Insulation	Type: IPE
	Thickness: 0.6" / 15.7 mm
	Dielectric Strength: 500 VAC/minute
	Insulation Resistance: 1,000 MOhms per 3' / 0.9 m
Conductor	AWG (AC): 24 (40/3.15 quantity/mm)
	Cross Sectional Area: 310 mm ²
	AWG (Quad): 21
Pitch Twist Quad	0.8" / 20 mm
Shield Coverage	>95% TAC Braid
Conductor D.C.R.	
Shield D.C.R.	
Nominal Capacitance	Between Twin Blue & White Conductors: 46 pF/ft / 150 pF/m
	Between Conductors & Shield: 57 pF/ft / 185 pF/m
Nominal Impedance	44 Ohms
Nominal Attenuation	0.9 V/1,000' / 0.3 V/100 m
Group Delay Time	1.80 ns/ft / 5.9 ns/m
Brittle Point	-56°F / -49°C
Length	656' (200 m)
Weight	24 lb / 11 kg

Neutrik XX Series Male and Female XLR Connectors



NC3FXX

3 pole female cable connector, Nickel housing, silver contacts



NC3MXX

3 pole male cable connector, Nickel housing, silver contacts



NC5FXX

5 pole female cable connector, Nickel housing, silver contacts



NC5MXX

5 pole male cable connector, Nickel housing, silver contacts

HOOK UP LEAD CONNECTORS

Mains 3 Way Hook-Up Splitter Y Connector 16A / 240V (IP44)

Features:

- 1.A 240V 16amp 3 Way adaptor IP44 rated three-way splitter. Ideal for caravans, camper vans, Motor homes, boats.
- 2.Rated voltage:220V
- 3.Rated current:16A
- 4.Environment temperature: -30-140 (°C)
- 5.Case Material :polystyrene acrylic
- 6.Conductor Material: copper



Mains Hook-Up Site Plug 16A / 240V (IP44)

Features:

- High Quality
- Durable
- Easy to use
- 3-Pin earthed plug (Male)

Specifications:

- IP Rating: IP44
- Max ampage: 16A
- Max voltage: 240V



Mains Hook-Up Site Socket 16A / 240V (IP44)

Features:

- High Quality
- Durable
- Easy to use
- 3-Pin earthed Socket (Female)

Specifications:

- IP Rating: IP44
- Max ampage: 16A
- Max voltage: 240V



Antari HZ-400 Haze Machine



Input voltage	US model : AC 100-120V, 50/60Hz 3.92A
	EU model : AC 220-240V, 50/60Hz 2A
Rated power	470W
Fluid consumption	1.1 ml/min
Fluid tank capacity	2.5 Liters (0.66 gallon)
Compatible fluid	Antari HZL Haze Fluid
Operating time	37 hrs at max. output
Ambient temp/ range	0°C – 40°C (32°F – 104°F)
Control	Manual, Timer, DMX
	Wireless (Optional)
DMX channels	1 channel
Connection	IEC (Power)
	XLR 3-pin (DMX)
Optional accessories	HCR-1 Wireless Remote
Dimension	L 500 W 320 H 319 mm
	(L 19.69 W 12.60 H 12.56 inch)
Weight	18.5 kg (40.79 lbs)

Antari HZL-4 Oil-Based Haze Liquid for Haze Machines (4 Liters)

The 4-liter **HZL-4 Oil-Based Haze Liquid** from **Antari** is a nontoxic, oil-based hazer liquid that produces a pure, translucent haze with long hang time and low moisture content. Colorless, odorless, and nonflammable, this liquid leaves no long-lasting residue or contamination and complies with the strictest health and safety regulations. It will increase the lifespan and reliability of Antari hazers, including the HZ-100, HZ-300, HZ-350, HZ-400, HZ-500, and HZ-1000.



Antari HZL-4 Specs

Fluid Type	Haze
Fluid Base	Oil
Liquid Volume	1.1 gal / 4.0


CAME-TV Boltzen 150w Fresnel Focusable LED Bi-Color Kit



CAME-TV Boltzen 150w Fresnel
Focusable LED Bi-Color 30900
Lux@1m

BOWEN'S UNIVERSAL ADAPTER • BOWEN'S
BOWEN'S UNIVERSAL ADAPTER • BOWEN'S

Model	Watts	Beam Angle	Illuminance (Lux)@ / 1 m
F-150S	150W+150W	28°-80°	30900



CAME-TV Boltzen 150w Fresnel
Focusable LED Bi-Color 30900
Lux@1m

BOWEN'S UNIVERSAL ADAPTER • BOWEN'S



CAME-TV Boltzen 150w Fresnel
Focusable LED Bi-Color 30900
Lux@1m

PLUS CAME-TV BOLTZEN 150W FRESNEL FOCUSABLE LED
BOLTZEN



Soft Box
Optional



Bowen Converter
Optional



Boltzen Light

CAME-TV Q-55S Boltzen 55w High Output Fresnel Focusable LED Bi-Color 8700 Lux@1m



BI-COLOR

Model	Watts	Beam Angle	Illuminance (Lux)@ 1 m
Q-55S	55W+55W	15°-60°	8700