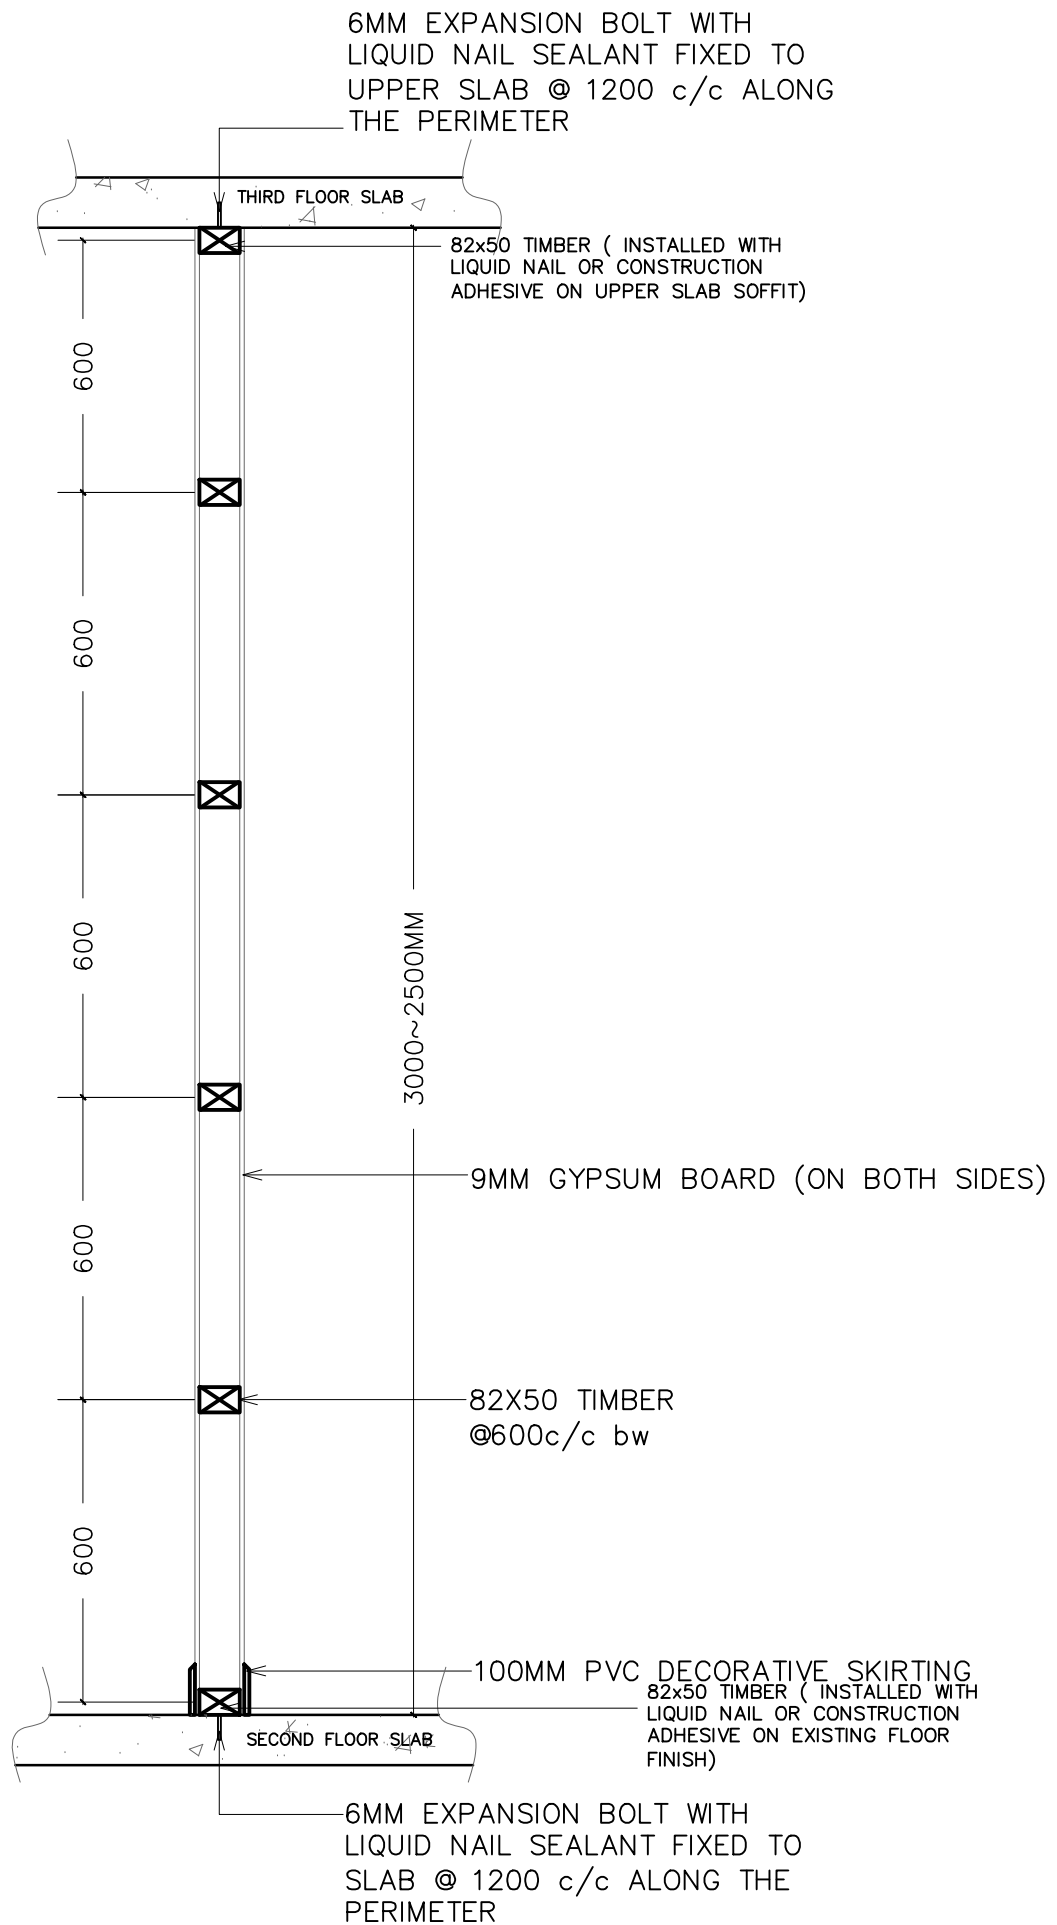


H.REAL SECOND FLOOR PARTITION LAYOUT

SCALE: 1 : 100

100MM THK. TIMBER FRAMED 3000~2500MM HIGH GYPSUM PARTITION



TYPICAL INTERIOR DRYWALL SECTIONAL VIEW

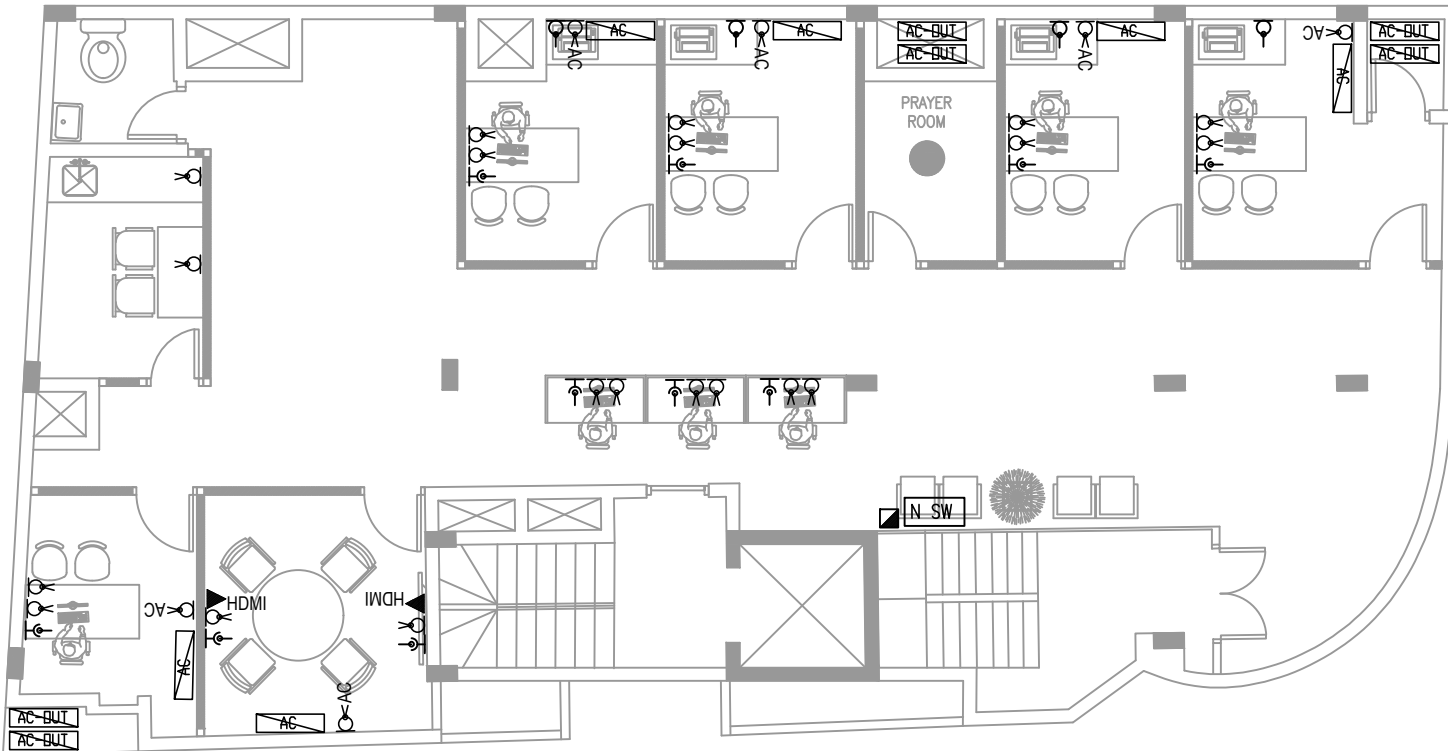
SCALE: 1 : 15

SYMBOL		D1		VENTILATION AREA		D2		VENTILATION AREA	
				1.36 sq.m				1.61 sq.m	
ELEVATION									
FINISHED FLOOR LEVEL									
REQUIRED	QUANTITY	06			02				
	LOCATION	SF	SECOND FLOOR		SF	SECOND FLOOR			
JAMBS	MATERIAL	TREATED TIMBER				WHITE POWDER COATED ALUMINIUM			
	FINISH	PLAIN PAINTED SEMI GLOSS FINISH				WHITE POWDER COATED ALUMINIUM			
PANEL	MATERIAL	SOLID TREATED TIMBER				FIXED GLASS			
	FINISH	PLAIN PAINTED SEMI GLOSS FINISH				FIXED GLASS			
CASING	MATERIAL	DECORATIVE TREATED TIMBER				-			
	FINISH	PLAIN PAINTED SEMI GLOSS FINISH				-			
HINGES	MATERIAL	STAINLESS STEEL				STAINLESS STEEL			
HANDLE SET & LOCK		TYPICAL HANDLE SET WITH LATCH UNIT				-			
CLOSER		-				-			
STOPPER /HOLDER		TYPICAL WALL MOUNT				TYPICAL FLOOR MOUNT			
NOTES		-				-			










H.REAL SECOND FLOOR DW SCHEDULE

SCALE: 1 : 50

18691 [61'-4"]



ELECTRICAL LEGEND

-  RJ45 WALL OUTLET (DUAL PORT FACEPLATE) (+900MM FROM FFL)
-  HDMI HDMI OUTLET (SINGLE GANG) (+300MM FROM FFL)
-  13A WALL SOCKET OUTLET (SINGLE GANG) (+300MM FROM FFL)
-  13A WALL SOCKET OUTLET (DOUBLE GANG) (+1200MM FROM FFL)
-  AC (15A WALL SOCKET SINGLE GANG) (300MM BELOW CEILING)
-  AC AIRCONDITIONER INDOOR (9000 BTU)
-  AC-OUT AIRCONDITIONER OUTDOOR (9000 BTU)
-  SUB D-BOARD (SURFACE MOUNTED)
-  N SW PROPOSED NETWORK SWITCH (OUT OF SCOPE)

H.REAL SECOND FLOOR ELECTRICAL & NETWORK PLAN

SCALE: 1 : 100

NOTE: ALL ELECTRICAL CABLES SHALL BE IN FLEXIBLE CONDUITS INSIDE THE DRYWALLS, AND IN PVC TRUNKING ON EXISTING WALLS. PVC TRUNKING SHALL BE INSTALLED WITH CONSTRUCTION ADHESIVES.
ALL NETWORK CABLES SHALL BE WIRED FROM PROPOSED NETWORK SWITCH LOCATION TO THE LOCATIONS SHOWN