



SAFETY STRIPE 7.07 L x .62 W

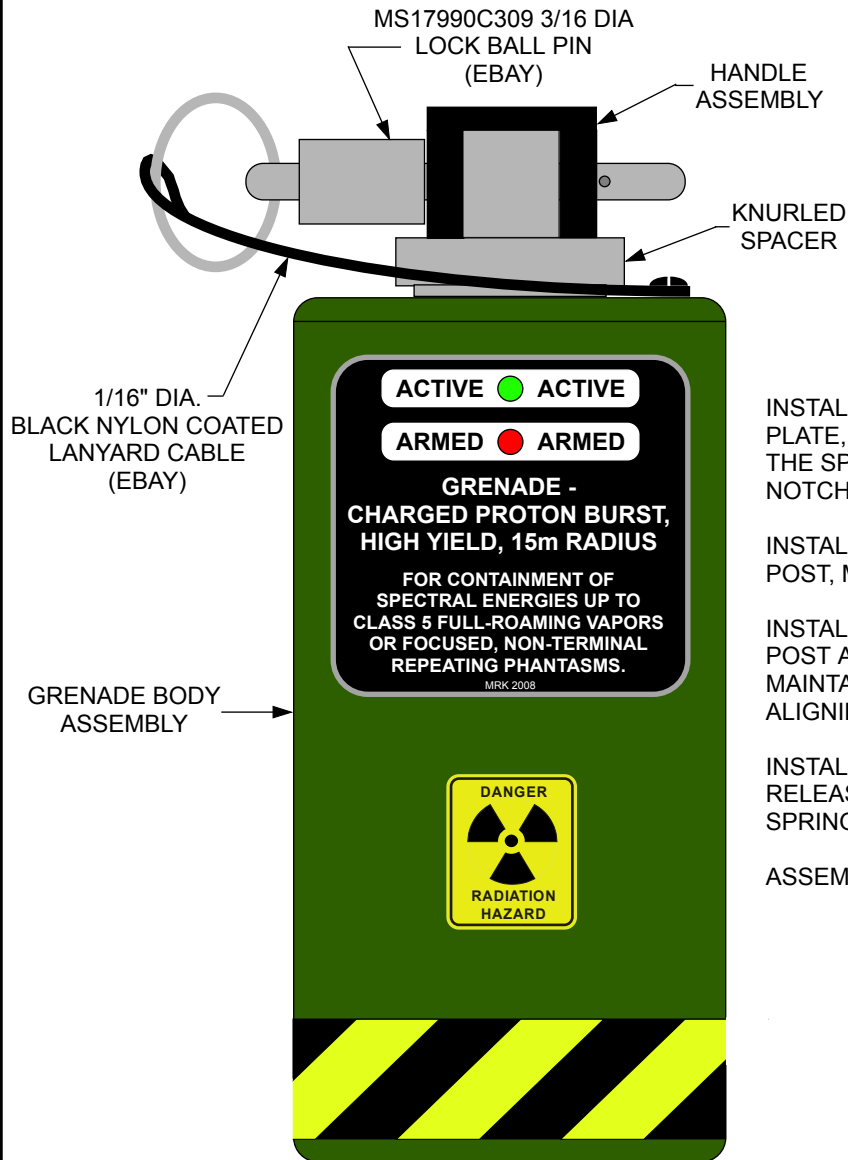

GRENADE ASSEMBLY, FRONT VIEW

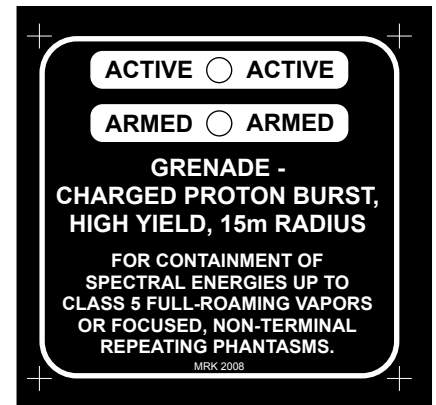

ASSEMBLY


INSTALL BODY TUBE ON TO BASE, THEN TOP PLATE, PUSHING DOWN TO COMPRESS THE SPRING AND ENGAGING LOCATOR NOTCHES ONTO PINS.

INSTALL KNURLED SPACER OVER CENTER POST, MAINTAINING PRESSURE ON SPRING.

INSTALL HANDLE ASSEMBLY OVER CENTER POST AND AGAINST KNURLED SPACER, MAINTAINING SPRING PRESSURE AND ALIGNING LOCK PIN HOLE.

INSTALL LOCKING CROSS PIN AND RELEASE HAND PRESSURE ON SPRING.

ASSEMBLY IS NOW SECURE.

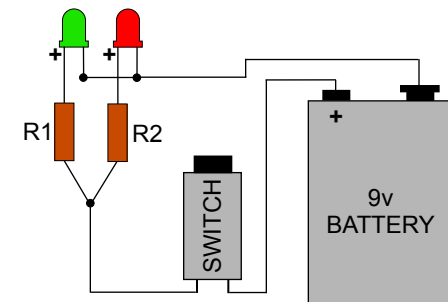

ELECTRONIC CIRCUIT LAYOUT

“ACTIVE” LED -

3mm GREEN, 3.2-3.6 volt, 30ma, 4k MCD. USE 220 OHM 1/4 WATT RESISTOR (R1).

“ARMED” LED -

3mm RED FLASHING, 1.9-2.2 volt, 30ma, 4k MCD. USE 270 OHM 1/4 WATT RESISTOR (R2).



TITLE GRENADE - ANTI SPECTRAL, CHARGED PROTON BURST			
SCALE 1:1	MEDIA SIZE 8.5 x 11	PG 3 OF 3	
DRAWN BY “Busybuilder”	DATE 6-14-08		