



BARTLETT

— INSTRUMENT COMPANY —

Greenhouse Environmental Control System

Dual Zone Capability
2 Temperature Sensors
Included

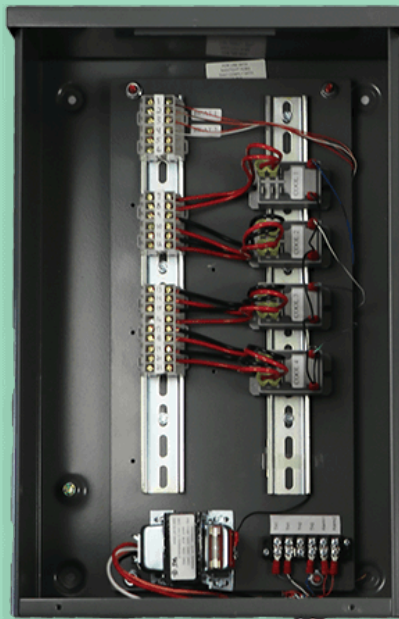


ClimateBoss

GHK (louver/fan or forced ventilation)




Features:

- 3 Stages for Programming (DIF, Day, Night)
- Cool & Heat:
 - 2 Stages of Heating (open/closed contacts or source 24 VAC)
 - Optional third Heat (e.g. bench, floor)
 - 4 Cool (source 24 VAC)
 - 2 Proportional Outputs - Open & Close (e.g. vents or side walls)
 - Automatic or manual settings for each Heat or Vent output
- 2 Timer Outputs for Shade, Lights or Misting
- 2 HAF relay outputs (source 24 VAC)
- Dehumidification Cycle
- Simple, Touchscreen Interface
- WiFi Connectivity;  Headgrower Compatible
- Data: Run times, statistics and 24 hr. graph
- 24 hour clock and memory with battery back-up

EasyWire:

- Custom made relay cabinet for the ClimateBoss
- Has 30 Amp relays and an easy connection terminal strip.
- Optional sealed enclosure
- (C)UL Listed
- Drawings Included

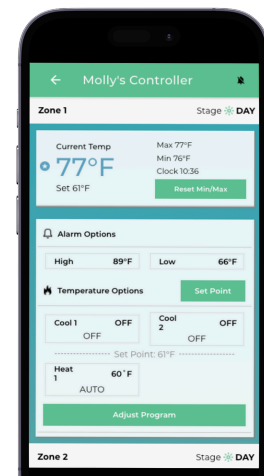

Mobile App & Desktop
access available

