


THE **SRP EVENGROW**® LINE OF INFRARED HEATERS OFFER THE BEST PREMIUM FEATURES AVAILABLE IN THE INDUSTRY FOR OPTIMUM PRODUCTION AND MAXIMUM RETURN ON INVESTMENT.

All EVENGROW® Heaters can be upgraded with the SMART OPTI-ZONE Heating Technology, providing:

- Decentralized zoning control
- Steady monitoring, diagnostics, and alerts
- Remote Setpoint change

Technology eliminates the "hot spot" without compromising efficiency.

- Improved growth rates and increased water consumption
- Low clearances above, minimal convective heat loss and safe for plastic drop ceiling
- No hot spot for maximum animal comfort and less crowding
- Available in NG and LP, MG or Alum finishes




Part No.	SMART Part No.	Heater Description
ALTX08 P 4A	ASLTX08 P 4A	ALTX Model Two-stage Heater 80,000-40' LP
ALTX08 P S4 M	ASLTX08 P S4 M	ALTX Model Two-stage Heater 80,000-40' LP, MG finishing
ALTX10 N 5A	ASLTX10 N 5A	ALTX Model Two-stage Heater 100,000-50' NG

Premium high efficiency features for the agricultural industry with special anti-

corrosion construction for harsh environments.

- Waterproof housing for best reliability
- Potted ignition modules
- Sealed maintenance-free blower motor
- · Available in NG and LP, MG or Alum finishes


MO	DEL	Δι	IX	ጼ Δ	TX

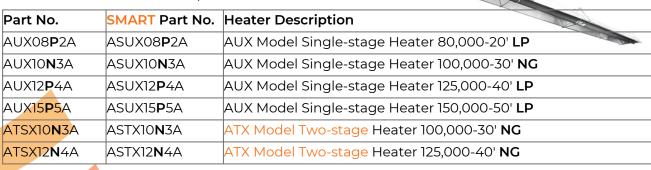

Please contact us for more heater sizing and availability.



THE **SRP BIG SHOT**® HEATER PROVIDES MAXIMUM RADIANT COVERAGE TO THE LITTER IN POULTRY HOUSES, ESPECIALLY IN THE FIRST CRUCIAL DAYS OF PLACEMENT.



- 16° tilted reflectors for improved heat distribution in wider houses
- Waterproof housing for best reliability
- Low clearance above for installation close to ceiling.
- Single (AUXS) or two stage (ATXS) capability
- Available in NG and LP, MG or Alum finishes

SMART Part No.	Heater Description
AUXS06 P 2U	AUX Model Single-stage Big Shot® Heater 60,000-20' LP
AUXS08 N 2U	AUX Model Single-stage Big Shot® Heater 80,000-20' NG
ATXS06 P 2U	ATX Model Two-stage Big Shot® Heater 60,000-20' LP
ATXS08 N 2U	ATX Model Two-stage Big Shot® Heater 80,000-20' NG



HINGED VENT TERMINAL CS074

The "Flapper" prevents cold air from entering the emitter tube when heater is not operating, and directs warm exhaust air toward the floor of the barn during operation.

THE **SRP FORCED AIR HEATER** PROVIDES RELIABLE HEAT FOR AGRICULTURAL ENVIRONMENTS. THE DIRECT-FIRED DESIGN DELIVERS EXCEPTIONAL EFFICIENCY AND PROVIDES YEARS OF HEAVY-DUTY PERFORMANCE.



- Two stage capacity 250,000/160,000 BTU/H
- Flexible installation options for interior and exterior settings
- Seamless switching between two and single stages
- Available in Galvanized or stainless steel

Part No.	Heater Description	
AA250	Galvanized steel Forced Air Two-stage Heater No	G
AA250S	Stainless steel Forced Air Two-stage Heater NG	

If propane fuel is required, please place an order for the fuel conversion kit **BK010** for field conversion.

THE SRP HIGH OUTPUT SLIM AND SMART BROODERS PROVIDE UP TO 15% MORE RADIANT HEAT TO THE FLOOR THAN LEADING COMPETITORS

All SRP Brooders can be upgraded with the SMART Technology:

- Variable radiant heating and decentralized zoning control
- Burner monitoring individual or per zone.
- Continuous monitoring, diagnostics, and alarming.
- Remote Setpoint change



MODEL BR40 & BRS40

- Available in NG and LP
- Widest deep-dish aluminum reflector in the industry
- Large stainless steel emitter assembly surface optimized design for high radiant efficiency
- Water-resistant IP55 rated controls enclosure
- Robust stainless steel components
- Can be used with high pressure (5 psi) gas supply with line pressure regulator

Part No.	SMART Part No.	Heater Description
BR40 P (N)	BRS40 P (N)	High Efficiency Gas-fired Brooder, 40,000 BTU/H LP (NG)
BR40 P 6 (N)	BRS40 P 6 (N)	High Efficiency Gas-fired Brooder, 40,000 BTU/H LP (NG), 6-Pack
BR40 P 24 (N)	BRS40 P 24 (N)	High Efficiency Gas-fired Brooder, 40,000 BTU/H LP(NG), 24-Pack

Introducing the NEW two stage high efficiency SRP Brooder, MODEL BRST40 Retaining all the smart and slim advantages of the BRS40 model, the new BRST40 features a groundbreaking two-stage valve system, meticulously designed to deliver unparalleled performance while minimizing energy consumption.

SMART Part No.	Heater Description
BRST40 P (N)	High Efficiency Two-stage Brooder, 40,000 BTU/H LP (NG)
BRST40 P 6 (N)	High Efficiency Two-stage Brooder, 40,000 BTU/H LP (NG), 6-Pack
BRST40 P 24 (N)	High Efficiency Two-stage Brooder, 40,000 BTU/H LP (NG), 24-Pack

Please contact us for more heater sizing and availability.

