


Side by Side



1. Mount the rubber sealing strip to the cabinet surface.
Follow the front edge.
Cut the rubber sealing to fit the length, if necessary.



2. Remove the bolts that holds the top hinge.
Place the top plate over the screw holes and remount hinge screws and add the 2 extra screws in the other cabinet

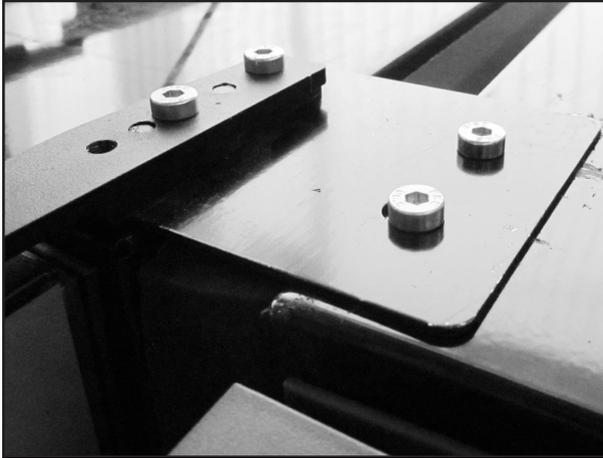

3. Place the top plate over the screw holes and remount hinge screws and add the 2 extra screws in the other cabinet



- 4 Mount the bottom bracket so the groove get fixed around the 2 adjustable front feet.



4 The bracket must be aligned with the cabinet



5. Tighten the screw, so the rubber hose bush against the cabinets. Replace the Rubber sealing