


## 4.2 Graphic Display 128 x 240 Pixels

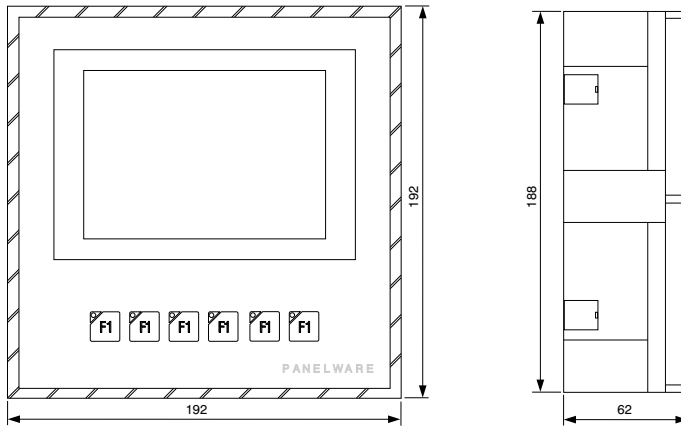

Technical Data	
<b>Model Number</b>	
Blue	4D1164-00-090
Black	4D1164-00-590
<b>Display Type</b>	LCD, graphics capable
<b>Resolution</b>	
Text Mode	16 lines x 40 characters
Graphics Mode	128 x 240 pixels
<b>Background Lighting</b>	CFL (miniature fluorescent lamp)
<b>Keys</b>	6 keys with LEDs
<b>Temperature</b>	
Operating	0 to 50 °C (32 to 122 °F)
Storage	-20 to 60 °C (-4 to 140 °F)
<b>Relative Humidity</b>	
Operating	20 to 85 % (non-condensing)
Storage	20 to 90 % (non-condensing)
<b>Shock</b>	Conforms to IEC 60068-2-27 15g equivalent, 150 m/sec <sup>2</sup> , 11 msec, 3 axes (positive and negative)
<b>Vibration</b>	Conforms to IEC 60068-2-6 1g equivalent, 10-58 Hz; 0.075 mm 58-150 Hz; 9.8m/sec <sup>2</sup> 20 cycles per axis
<b>Current Requirements</b>	135 mA at 24 VDC