

GRI

WE'LL GET YOU THERE



DELTA1

PREMIUM

MATERIAL HANDLING TIRES

DELTA 1

A Solid Tire at Peak Performance

DELTA 1 brings together an innovative design and tire construction using advanced natural rubber compounds to provide optimum performance.



ENERGY SAVING

Highest energy saving and efficiency due to extremely low rolling resistance, resulting in very low carbon emissions.



OPERATING TIME

Highest operating time due to reduced heat build-up and very low cost per hour.



LIFE TIME

Exceptional lifetime due to very high abrasion resistance.



CORNERING STABILITY

Maximum cornering stability enabling high level of safety and comfort.




Wide profile, bold tread pattern and increased tread depth.

Optimized for high intensity applications with an asymmetric tread design.



DELTA1

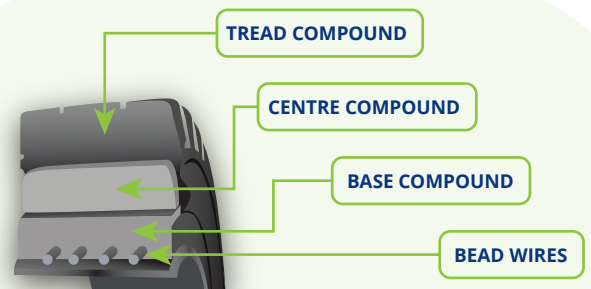

Tire Size	Rim Size	Clip on	Profile	Tire Dimensions		Tire Dimensions		Other Vehicles Load Capacity (Kg)		Max.Forklift Trucks Load Capacity			
				Max width ±1% (mm)	OD ± 2% (mm)	Max width ±1% (inch)	OD ± 2% (Inch)	6 Km/h	10 Km/h	Lbs at 16 miles/hr		Kgs at 25 Km/hr	
										Load wheel	Steer wheel	Load wheel	Steer wheel
4.00-8	3.00 D-8	•	GS	105	406	4.13	15.98	950	860	2095	1610	950	730
5.00-8	3.00 D-8	•	DE	124	446	4.88	17.56	1415	1285	3120	2405	1415	1090
15x4 1/2-8 125/75-8	3.00 D-8	•	DE	116	377	4.57	14.84	1040	945	2295	1765	1040	800
16x6-8 150/75-8	4.33 R-8	•	GS	139	407	5.47	16.02	1455	1360	3210	2535	1455	1150
18x7-8 180/70-8	4.33 R-8	•	DE	158	453	6.22	17.83	2145	1945	4730	3640	2145	1650
140/55-9	4.00 E-9	•	DE	127	375	5.00	14.76	1170	1060	2580	1986	1170	900
6.00-9	4.00 E-9	•	DE	138	519	5.43	20.43	1885	1710	4155	3195	1885	1450
21x8-9 200/75-9	6.00 E-9	•	DE	188	520	7.40	20.47	2755	2505	6075	4675	2755	2120
6.50-10	5.00 F-10	•	DE	165	566	6.50	22.28	2340	2125	5160	3970	2340	1800
200/50-10	6.50 F-10	•	DE	197	455	7.76	17.91	2470	2240	5445	4190	2470	1900
23x9-10 225/75-10	6.50 F-10	•	DE	202	580	7.95	22.83	3445	3125	7595	5840	3445	2650
7.00-12	5.00 S-12	•	DE	180	650	7.09	25.59	2920	2645	6435	4940	2920	2240
23x10-12	8.00 G-12	•	DE	234	578	9.21	22.76	3770	3420	8310	6390	3770	2900
27x10-12 250/75-12	8.00 G-12	•	DE	238	677	9.37	26.65	3900	3540	8600	6615	3900	3000
250-15 250/70-15	7.00-15	•	DE	225	722	8.86	28.43	4750	4300	10470	8045	4750	3650
250-15 250/70-15	7.50-15	•	DE	225	722	8.86	28.43	4750	4300	10470	8045	4750	3650
8.15-15 (28x9-15) 225/75-15	7.00-15	•	DE	217	693	8.54	27.28	3770	3540	8310	6390	3770	2900
8.25-15	6.50-15	•	DE	214	811	8.43	31.93	4750	4300	10470	8045	4750	3650
300-15 315/70-15	8.00-15	•	DE	255	823	10.04	32.40	5850	5310	12895	9920	5850	4500
9.00-20	6.50-20		GS	225	971	8.86	38.23	5340	5200	11775	9813	5340	4450
9.00-20	7.00-20		GS	225	971	8.86	38.23	5340	5200	11775	9813	5340	4450
10.00-20	7.00-20		GS	250	1006	9.84	39.61	6000	5450	13227	11022	6000	5000
10.00-20	7.50-20		GS	250	1006	9.84	39.61	6000	5450	13227	11022	6000	5000
10.00-20	8.00-20		GS	250	1006	9.84	39.61	6000	5450	13227	11022	6000	5000
12.00-20	8.00-20		GS	265	1088	10.43	42.72	7500	6810	16532	13777	7500	6250





GRI takes a long-term view, looking beyond the obvious horizon. The **GREEN X CIRCLE** is a global farmer ecosystem connecting natural rubber farmers with crop farmers worldwide focusing on sustainable farming practices to increase productivity that will benefit farming communities and inspire greatness for generations to come.



GRI produces high-grade specialty tires that are built sustainably using pure natural rubber in Sri Lanka. Founded in 2002, the company produces material handling solid tires, radial agriculture tires and construction tires. GRI has operations in 9 countries, and a business presence in more than 50 countries. In 2018, GRI opened an advanced manufacturing plant in Sri Lanka to produce radial agricultural tires. In 2020, GRI commenced construction of a large mixing facility for tire compounds and in 2021 began further expansion of its advanced specialty tire plant. GRI ensures its commitment to sustainability and environmental protection through all its strategies and processes. Environmentally sustainable growth is our strategic goal, both now and for generations to come.

info@gritires.com
www.gritires.com

 www.facebook.com/GRI tires/
 www.instagram.com/gritires/?hl=en

LIMITED WARRANTY

All tires manufactured by Global Rubber Industries (Pvt) Ltd are covered by limited warranty, which includes cover against material, workmanship and other manufacturing defects subject to the usage of the tires under specified conditions. If any tire covered by this warranty is deemed unserviceable due to aforementioned defects, we will either repair the tire or provide an allowance to purchase a new tire at the current price as a percentage of the worn off tread of the original tire at the time of making the claim.

The cost of transportation, service and paid sales tax will be borne by the owner of the claimed tire. The limited warranty is exclusively applicable to the tire owner who is using the product. No other warranty of liability, expressed or implied, is applicable to the limited warranty or to our products.