B-SYSTEM
INSTALLATION SOLUTIONS

FlushFit

Sonance

Datasheet

Installation Video

FlushFit

Sonance VX 4"

Designed for the flush installation of Sonance speakers.

Datasheet

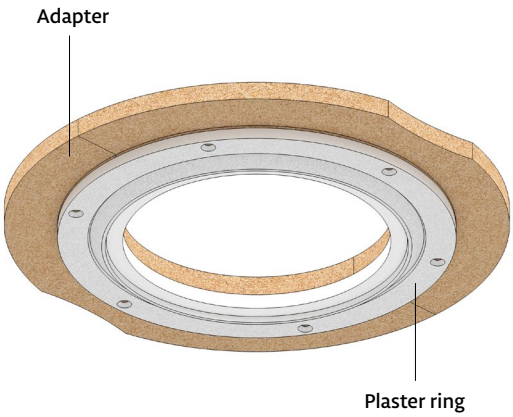

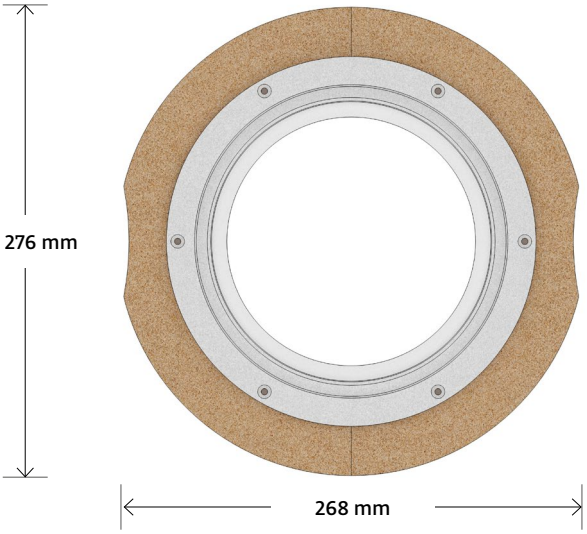

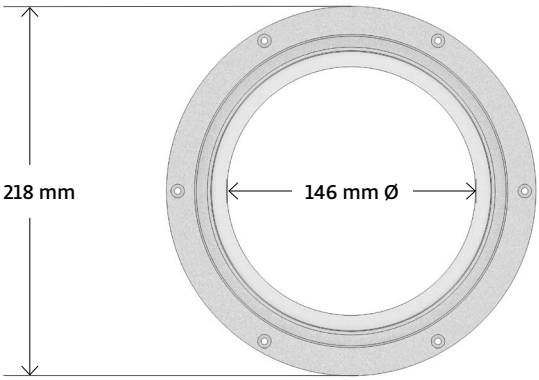

Description

The FlushFit Set enables a flush installation of all Sonance VX 4-inch in-ceiling speakers from the VX and Extreme Series seamlessly into drywall walls or ceilings.
The FlushFit Adapter can be installed in existing ceilings or walls (retrofit) as well as in new drywall constructions.

Features and Benefits

- Easy and secure installation of the speaker
- Adapter set available in standard sizes
- Allows for simple flush installation of all Sonanc in-ceiling speakers (VX and Extreme)
- 3-piece design for easy installation process
- Optional spacer rings allow the execution of all ceiling applications

Adapter compatible with Sonance Trimless Grill (93574)

Suitable for installation in both ceilings and walls.

Scope of delivery (per unit)

- 1 FlushFit Adapter set consisting of a 2-piece adapter (white MDF) and a 1-piece plaster ring (white exterior-grade MDF, primed and quartz-coated)
- Round cardboard protective cover
- Square fiberglass joint tape
- 12 × Knauf diamond screws 3.9 × 23 mm
- Installation manual
- Cardboard packaging

Type	**FlushFit Adapter Sonance VX 4"**
SKU	1004400
Dimensions	**Adapter** (2-piece) 276/149 × 12 mm MDF (Primer foil, white)
	Plaster ring (1-piece) 218/146 × 12 mm MDF Exterior (white with quartz coating)

Installation Video
https://b-system.com/flushfit

B-SYSTEM GmbH
Wilhelmstr. 20-5
D-78652 Deisslingen

Phone: +49 (0) 7420 889 889
E-mail: info@b-system.com
Web: www.b-system.com

B-SYSTEM INSTALLATION SOLUTIONS

FlushFit

Sonance VX 6"

Designed for the flush installation of Sonance speakers.

Datasheet

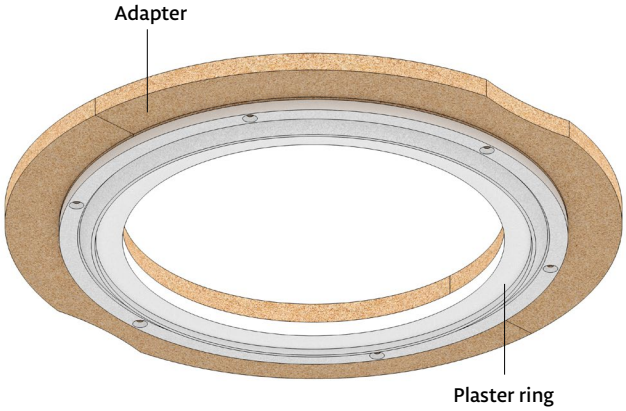

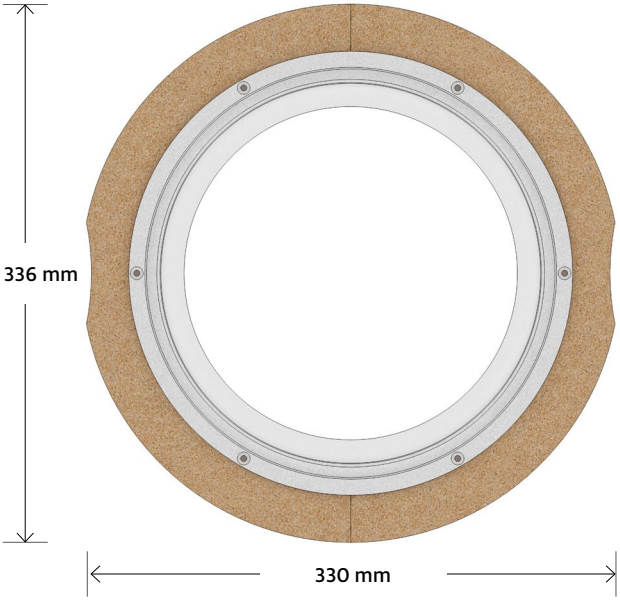

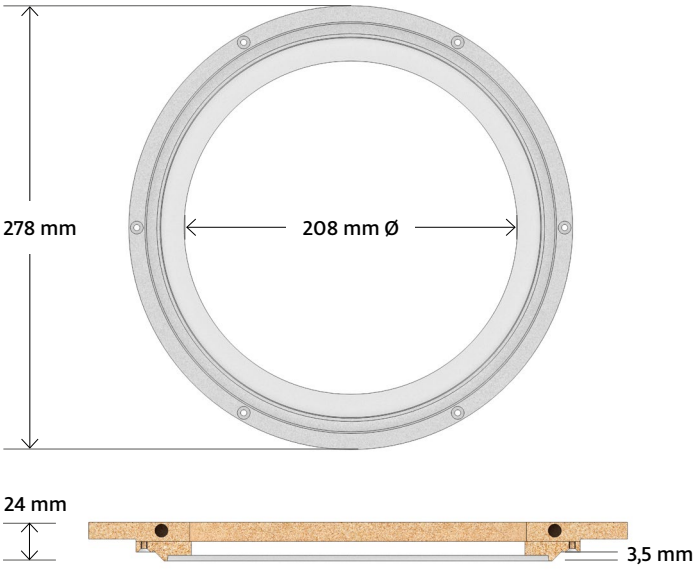

Description

The FlushFit Set enables a flush installation of all Sonance VX 6-inch in-ceiling speakers from the VX and Extreme Series seamlessly into drywall walls or ceilings.
The FlushFit Adapter can be installed in existing ceilings or walls (retrofit) as well as in new drywall constructions.

Features and Benefits

- Easy and secure installation of the speaker
- Adapter set available in standard sizes
- Allows for simple flush installation of all Sonance in-ceiling speakers (VX and Extreme)
- 3-piece design for easy installation process
- Optional spacer rings allow the execution of all ceiling applications

Adapter compatible with Sonance Trimless Grill (93576)

Suitable for installation in both ceilings and walls.

Scope of delivery (per unit)

- 1 FlushFit Adapter set consisting of a 2-piece adapter (white MDF) and a 1-piece plaster ring (white exterior-grade MDF, primed and quartz-coated)
- Round cardboard protective cover
- Square fiberglass joint tape
- 12 × Knauf diamond screws 3.9 × 23 mm
- Installation manual
- Cardboard packaging

Type	**FlushFit Adapter Sonance VX 6"**
SKU	1004600
Dimensions	**Adapter** (2-piece) 336/210 × 12 mm MDF (Primer foil, white)
	Plaster ring (1-piece) 278/208 × 12 mm MDF Exterior (white with quartz coating)

Installation Video
https://b-system.com/flushfit

B-SYSTEM GmbH
Wilhelmstr. 20-5
D-78652 Deisslingen

Phone: +49 (0) 7420 889 889
E-mail: info@b-system.com
Web: www.b-system.com

B-SYSTEM INSTALLATION SOLUTIONS

FlushFit

Sonance VX 8"

Designed for the flush installation of Sonance speakers.

Datasheet

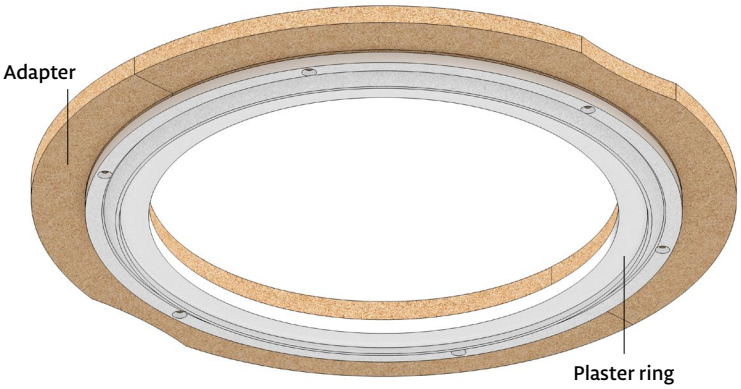

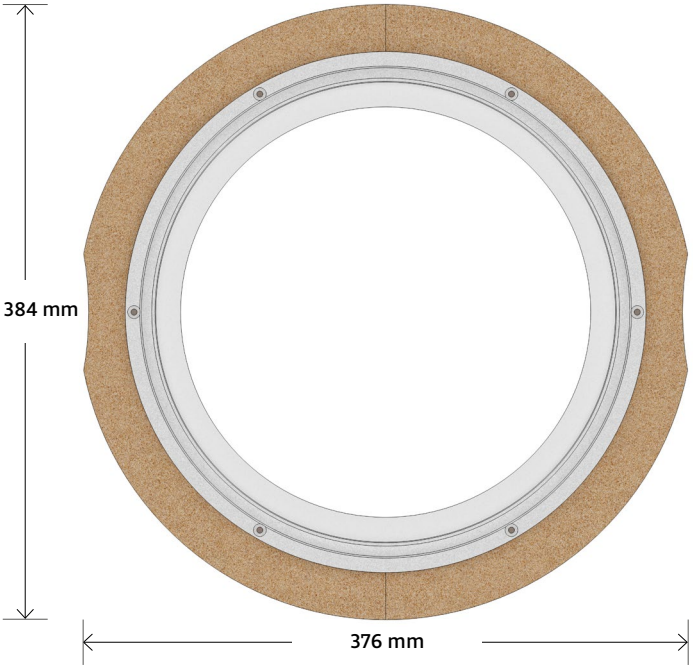

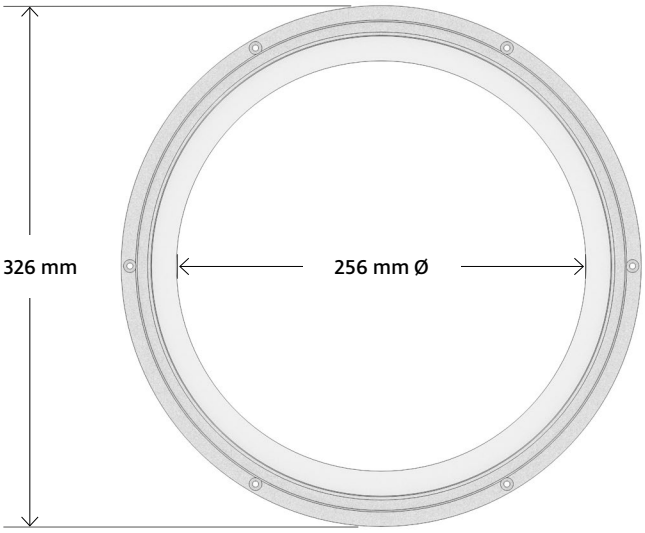

Description

The FlushFit Set enables a flush installation of all Sonance VX 8-inch in-ceiling speakers from the VX and Extreme Series seamlessly into drywall walls or ceilings.
The FlushFit Adapter can be installed in existing ceilings or walls (retrofit) as well as in new drywall constructions.

Features and Benefits

- Easy and secure installation of the speaker
- Adapter set available in standard sizes
- Allows for simple flush installation of all Sonance in-ceiling speakers (VX and Extreme)
- 3-piece design for easy installation process
- Optional spacer rings allow the execution of all ceiling applications

Adapter compatible with Sonance Trimless Grill (93578)

Suitable for installation in both ceilings and walls.

Scope of delivery (per unit)

- 1 FlushFit Adapter set consisting of a 2-piece adapter (white MDF) and a 1-piece plaster ring (white exterior-grade MDF, primed and quartz-coated)
- Round cardboard protective cover
- Square fiberglass joint tape
- 12 × Knauf diamond screws 3.9 × 23 mm
- Installation manual
- Cardboard packaging

Type	**FlushFit Adapter Sonance VX 8"**
SKU	1004800
Dimensions	**Adapter** (2-piece) 384/258 × 12 mm MDF (Primer foil, white)
	Plaster ring (1-piece) 326/256 × 12 mm MDF Exterior (white with quartz coating)

Installation Video
https://b-system.com/flushfit

B-SYSTEM GmbH
Wilhelmstr. 20-5
D-78652 Deisslingen

Phone: +49 (0) 7420 889 889
E-mail: info@b-system.com
Web: www.b-system.com

B-SYSTEM INSTALLATION SOLUTIONS

FlushFit

Sonance VXQ 4"

Designed for the flush installation of Sonance speakers.

Datasheet

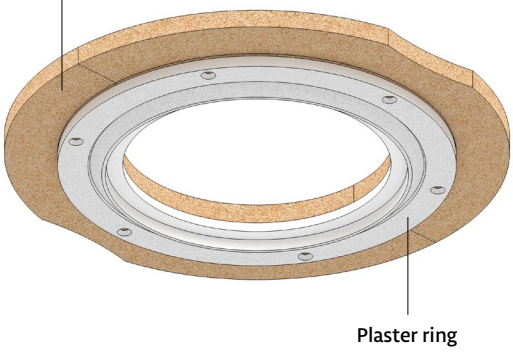

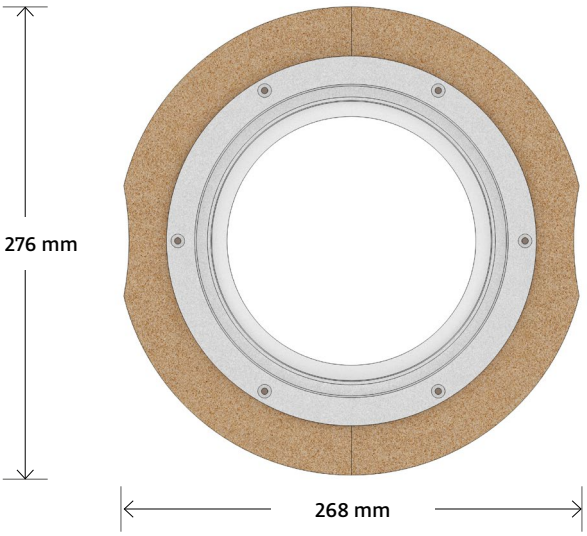

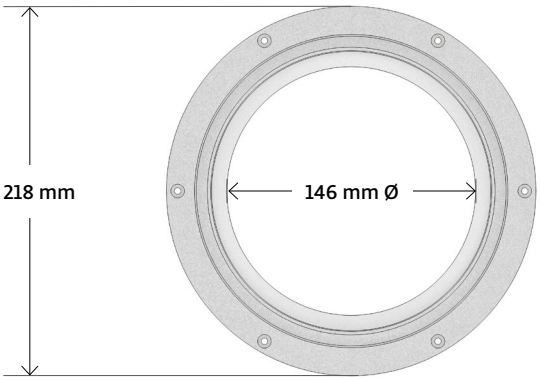

Description

The FlushFit Set enables a flush installation of all Sonance VXQ 4-inch in-ceiling speakers from the VX and Extreme Series seamlessly into drywall walls or ceilings.
The FlushFit Adapter can be installed in existing ceilings or walls (retrofit) as well as in new drywall constructions.

Features and Benefits

- Easy and secure installation of the speaker
- Adapter set available in standard sizes
- Allows for simple flush installation of all Sonance in-ceiling speakers (VXQ)
- 3-piece design for easy installation process
- Optional spacer rings allow the execution of all ceiling applications

Adapter compatible with Sonance Trimless Grill (60476)

Suitable for installation in both ceilings and walls.

Scope of delivery (per unit)

- 1 FlushFit Adapter set consisting of a 2-piece adapter (white MDF) and a 1-piece plaster ring (white exterior-grade MDF, primed and quartz-coated)
- Round cardboard protective cover
- Square fiberglass joint tape
- 12 × Knauf diamond screws 3.9 × 23 mm
- Installation manual
- Cardboard packaging

Type	**FlushFit Adapter Sonance VXQ 4"**
SKU	1005400
Dimensions	**Adapter** (2-piece) 276/149 × 12 mm MDF (Primer foil, white)
	Plaster ring (1-piece) 218/146 × 12 mm MDF Exterior (white with quartz coating)

Installation Video
https://b-system.com/flushfit

B-SYSTEM GmbH
Wilhelmstr. 20-5
D-78652 Deisslingen

Phone: +49 (0) 7420 889 889
E-mail: info@b-system.com
Web: www.b-system.com

B-SYSTEM INSTALLATION SOLUTIONS

FlushFit

Sonance VXQ 6"

Designed for the flush installation of Sonance speakers.

Datasheet

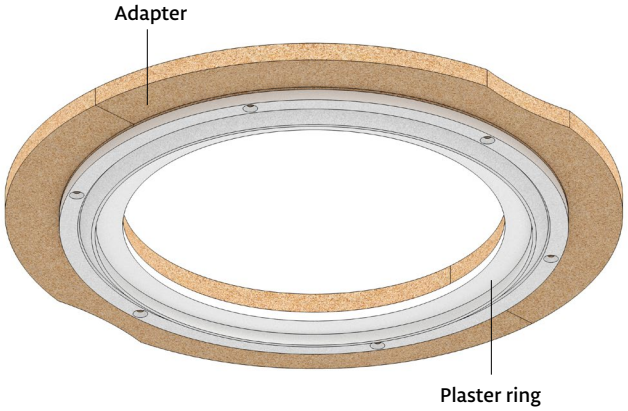

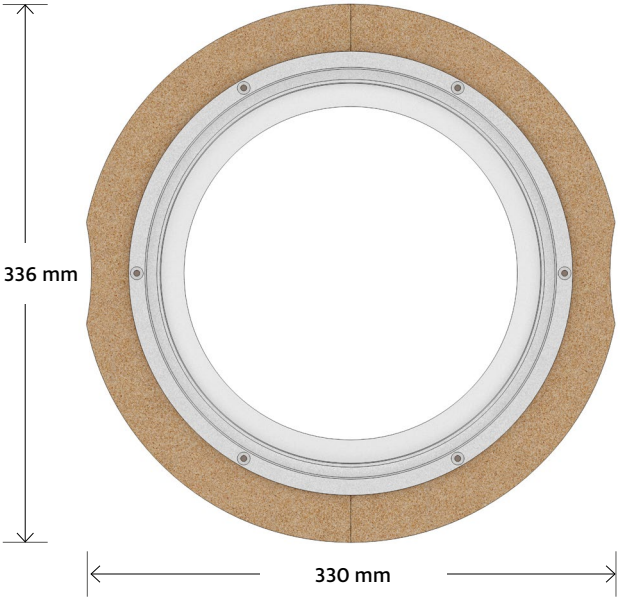

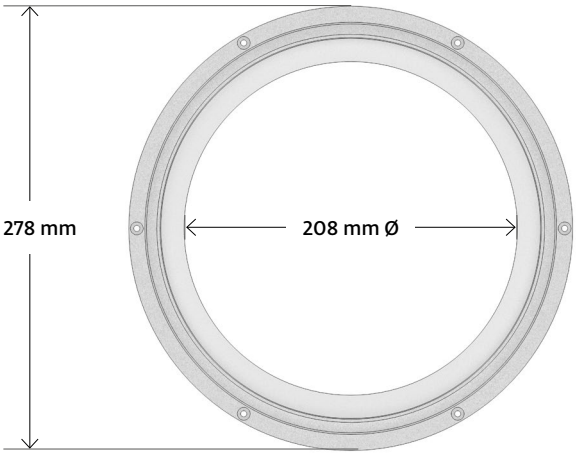

Description

The FlushFit Set enables a flush installation of all Sonance VXQ 6-inch in-ceiling speakers from the VX and Extreme Series seamlessly into drywall walls or ceilings.
The FlushFit Adapter can be installed in existing ceilings or walls (retrofit) as well as in new drywall constructions.

Features and Benefits

- Easy and secure installation of the speaker
- Adapter set available in standard sizes
- Allows for simple flush installation of all Sonance in-ceiling speakers (VXQ)
- 3-piece design for easy installation process
- Optional spacer rings allow the execution of all ceiling applications

Adapter compatible with Sonance Trimless Grill (60478)

Suitable for installation in both ceilings and walls.

Scope of delivery (per unit)

- 1 FlushFit Adapter set consisting of a 2-piece adapter (white MDF) and a 1-piece plaster ring (white exterior-grade MDF, primed and quartz-coated)
- Round cardboard protective cover
- Square fiberglass joint tape
- 12 × Knauf diamond screws 3.9 × 23 mm
- Installation manual
- Cardboard packaging

Type	**FlushFit Adapter Sonance VXQ 6"**
SKU	1005600
Dimensions	**Adapter** (2-piece) 336/210 × 12 mm MDF (Primer foil, white)
	Plaster ring (1-piece) 278/208 × 12 mm MDF Exterior (white with quartz coating)

Installation Video
https://b-system.com/flushfit

B-SYSTEM GmbH
Wilhelmstr. 20-5
D-78652 Deisslingen

Phone: +49 (0) 7420 889 889
E-mail: info@b-system.com
Web: www.b-system.com

B-SYSTEM INSTALLATION SOLUTIONS

FlushFit

Sonance VXQ 8"

Designed for the flush installation of Sonance speakers.

Datasheet

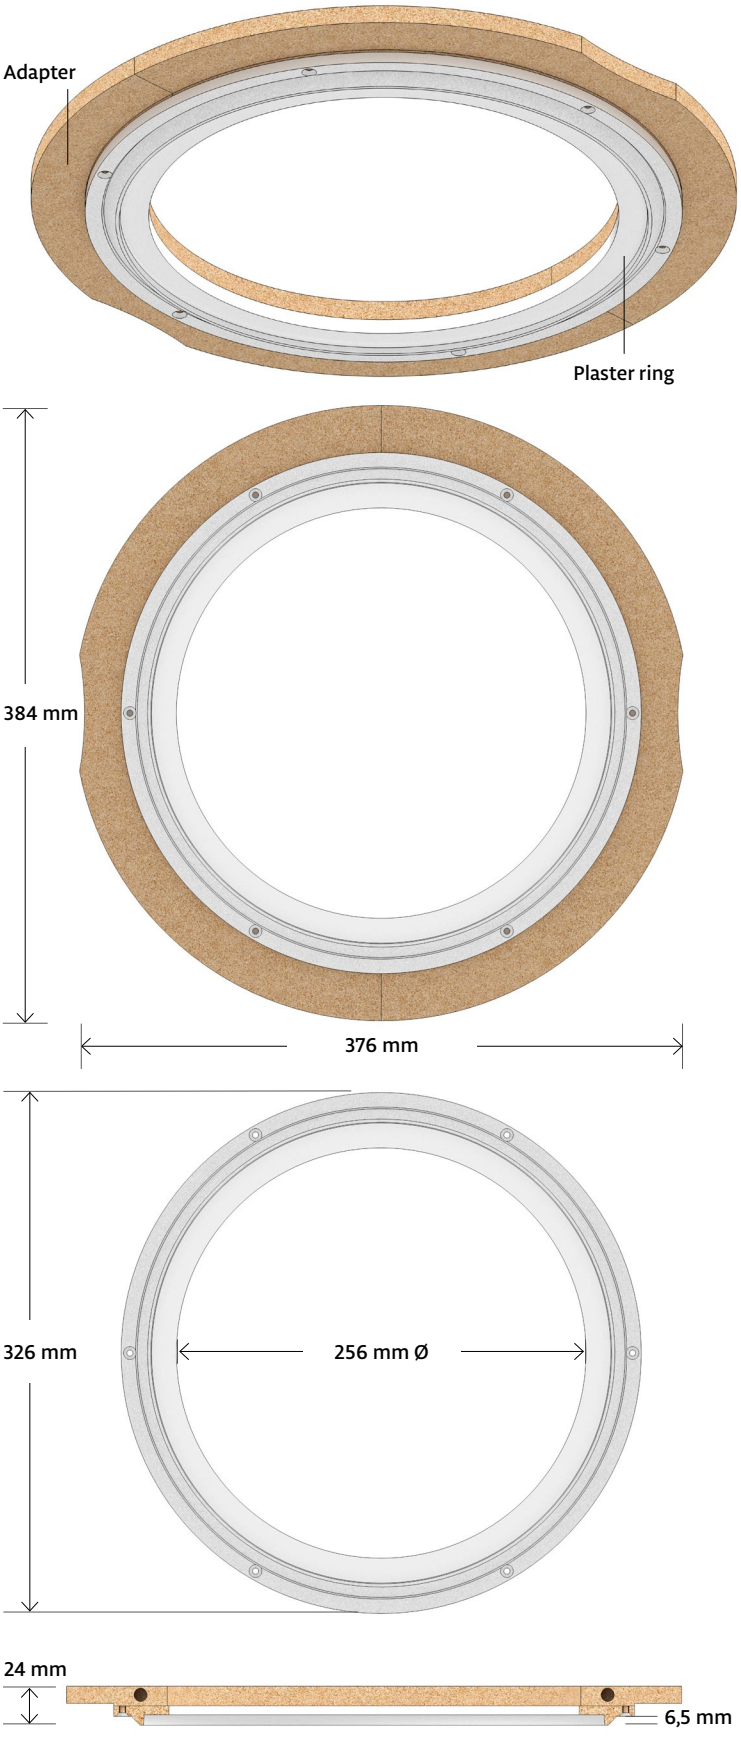

Description

The FlushFit Set enables a flush installation of all Sonance VXQ 8-inch in-ceiling speakers from the VX and Extreme Series seamlessly into drywall walls or ceilings.
The FlushFit Adapter can be installed in existing ceilings or walls (retrofit) as well as in new drywall constructions.

Features and Benefits

- Easy and secure installation of the speaker
- Adapter set available in standard sizes
- Allows for simple flush installation of all Sonance in-ceiling speakers (VXQ)
- 3-piece design for easy installation process
- Optional spacer rings allow the execution of all ceiling applications

Adapter compatible with Sonance Trimless Grill (60480)

Suitable for installation in both ceilings and walls.

Scope of delivery (per unit)

- 1 FlushFit Adapter set consisting of a 2-piece adapter (white MDF) and a 1-piece plaster ring (white exterior-grade MDF, primed and quartz-coated)
- Round cardboard protective cover
- Square fiberglass joint tape
- 12 × Knauf diamond screws 3.9 × 23 mm
- Installation manual
- Cardboard packaging

Type	**FlushFit Adapter Sonance VXQ 8"**
SKU	1005800
Dimensions	**Adapter** (2-piece) 384/258 × 12 mm MDF (Primer foil, white)
	Plaster ring (1-piece) 326/256 × 12 mm MDF Exterior (white with quartz coating)

Installation Video
https://b-system.com/flushfit

B-SYSTEM GmbH
Wilhelmstr. 20-5
D-78652 Deisslingen

Phone: +49 (0) 7420 889 889
E-mail: info@b-system.com
Web: www.b-system.com

B-SYSTEM INSTALLATION SOLUTIONS

Sonance FlushFit

Datasheet

4" Distance ring for VX/VXQ FlushFit Adapter (optional)

Spacer rings are used to adapt the FlushFit system to different plaster thicknesses or special ceiling conditions, for example for flush installation in acoustic ceilings or insulated ceilings.

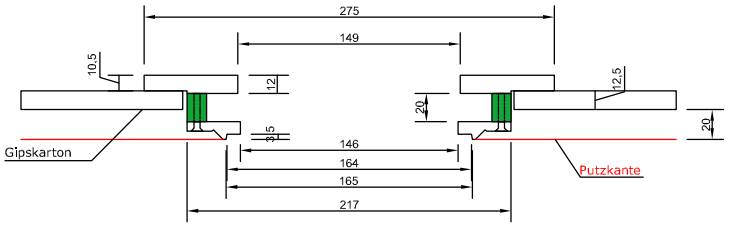

Sonance VX/VXQ 4" Distance ring set	
SKU	1006420
Dimensions	217/191 × 20 mm
Applications	for double-layered ceilings with a total thickness of 20 mm

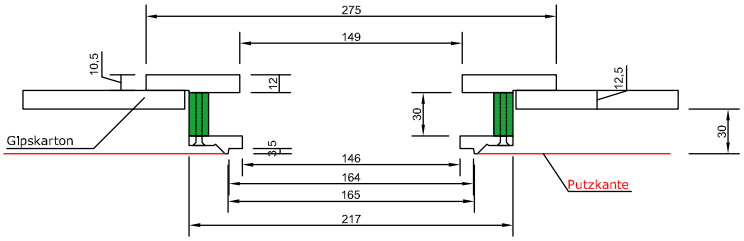

Sonance VX/VXQ 4" Distance ring set	
SKU	1006430
Dimensions	217/191 × 30 mm
Applications	for double-layered ceilings with a total thickness of 30 mm

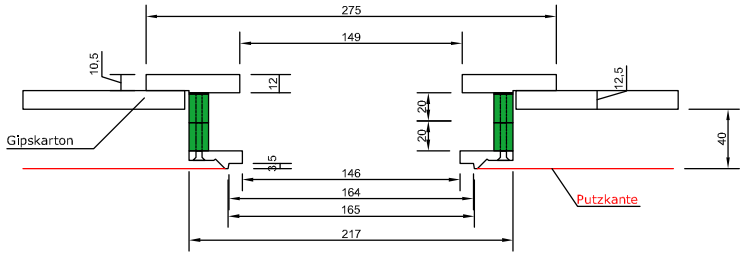

Sonance VX/VXQ 4" Distance ring set	
SKU	1006440
Dimensions	217/191 × 40 mm
Applications	for double-layered ceilings with a total thickness of 40 mm

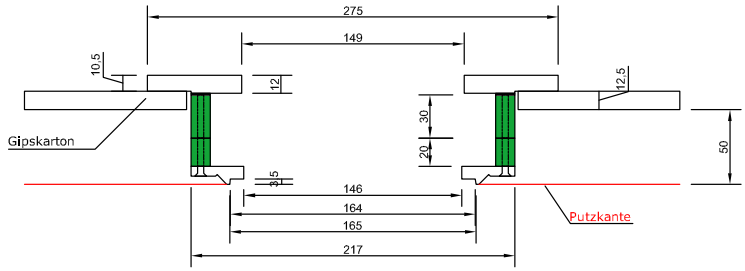

Sonance VX/VXQ 4" Distance ring set	
SKU	1006450
Dimensions	217/191 × 50mm
Applications	for double-layered ceilings with a total thickness of 50 mm

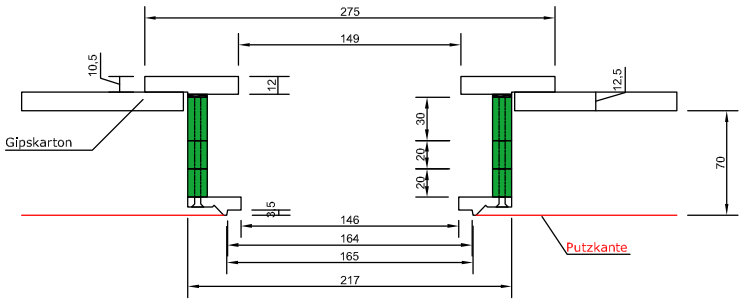

Sonance VX/VXQ 4" Distance ring set	
SKU	1006470
Dimensions	217/191 × 70 mm
Applications	for double-layered ceilings with a total thickness of 70 mm

B-SYSTEM GmbH
Wilhelmstr. 20-5
D-78652 Deisslingen

Phone: +49 (0) 7420 889 889
E-mail: info@b-system.com
Web: www.b-system.com

B-SYSTEM
INSTALLATION SOLUTIONS

Sonance FlushFit

Datasheet

6" Distance ring for VX/VXQ FlushFit Adapter (optional)

Spacer rings are used to adapt the FlushFit system to different plaster thicknesses or special ceiling conditions, for example for flush installation in acoustic ceilings or insulated ceilings.

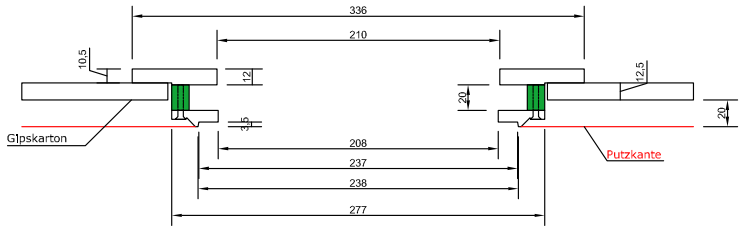

Sonance VX/VXQ 6" Distance ring set

SKU	1006620
Dimensions	217/191 × 20 mm
Applications	for double-layered ceilings with a total thickness of 20 mm

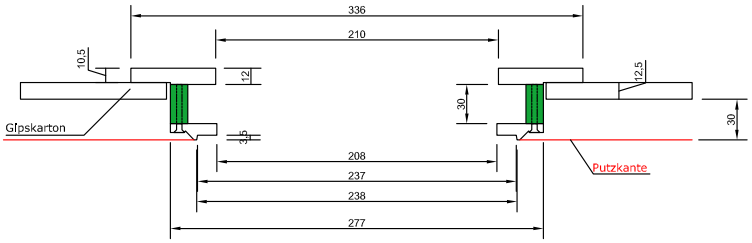

Sonance VX/VXQ 6" Distance ring set

SKU	1006630
Dimensions	217/191 × 30 mm
Applications	for double-layered ceilings with a total thickness of 30 mm

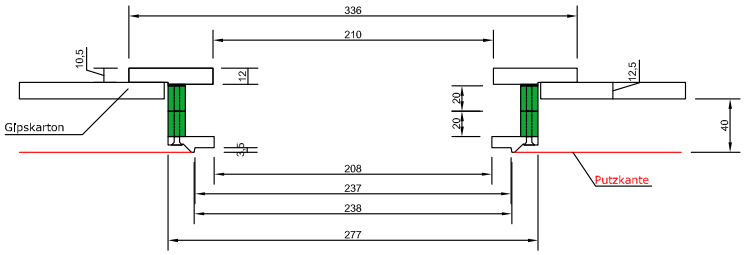

Sonance VX/VXQ 6" Distance ring set

SKU	1006640
Dimensions	217/191 × 40 mm
Applications	for double-layered ceilings with a total thickness of 40 mm

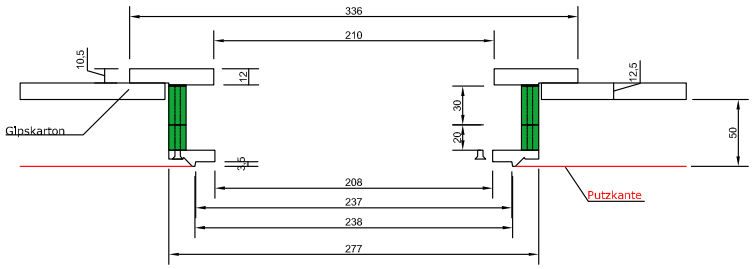

Sonance VX/VXQ 6" Distance ring set

SKU	1006650
Dimensions	217/191 × 50 mm
Applications	for double-layered ceilings with a total thickness of 50 mm

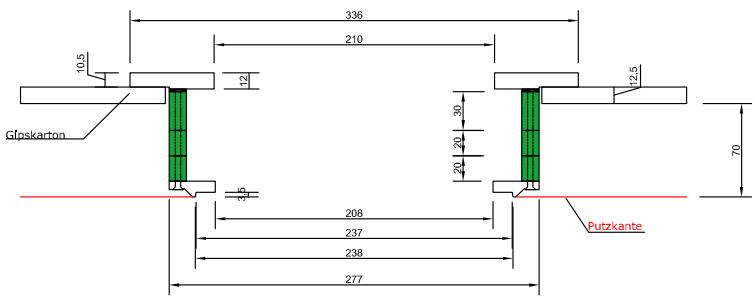

Sonance VX/VXQ 6" Distance ring set

SKU	1006670
Dimensions	217/191 × 70 mm
Applications	for double-layered ceilings with a total thickness of 70 mm

B-SYSTEM GmbH
Wilhelmstr. 20-5
D-78652 Deisslingen

Phone: +49 (0) 7420 889 889
E-mail: info@b-system.com
Web: www.b-system.com

B-SYSTEM INSTALLATION SOLUTIONS

Sonance FlushFit

Datasheet

8" Distance ring for VX/VXQ FlushFit Adapter (optional)

Spacer rings are used to adapt the FlushFit system to different plaster thicknesses or special ceiling conditions, for example for flush installation in acoustic ceilings or insulated ceilings.

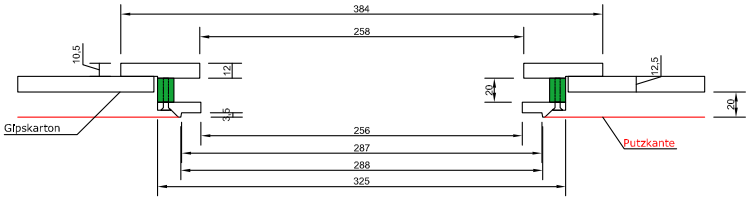

Sonance VX/VXQ 8" Distance ring set

SKU	1006820
Dimensions	217/191 × 20 mm
Applications	for double-layered ceilings with a total thickness of 20 mm

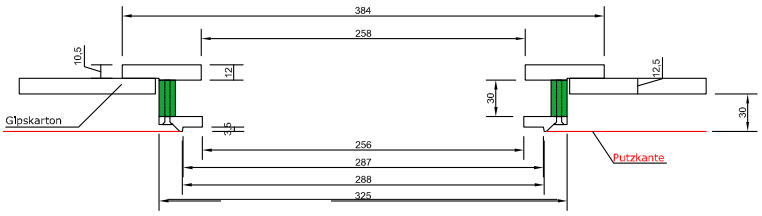

Sonance VX/VXQ 8" Distance ring set

SKU	1006830
Dimensions	217/191 × 30 mm
Applications	for double-layered ceilings with a total thickness of 30 mm

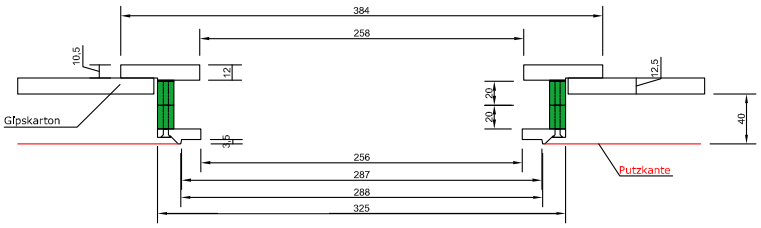

Sonance VX/VXQ 8" Distance ring set

SKU	1006840
Dimensions	217/191 × 40 mm
Applications	for double-layered ceilings with a total thickness of 40 mm

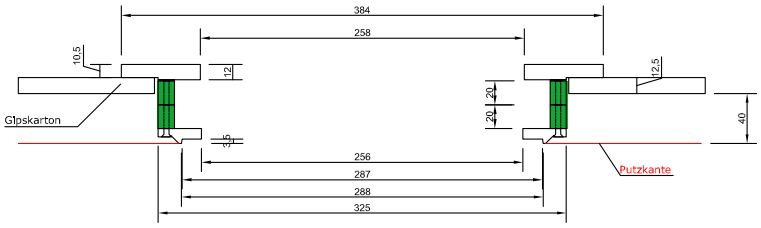

Sonance VX/VXQ 8" Distance ring set

SKU	1006850
Dimensions	217/191 × 50 mm
Applications	for double-layered ceilings with a total thickness of 50 mm

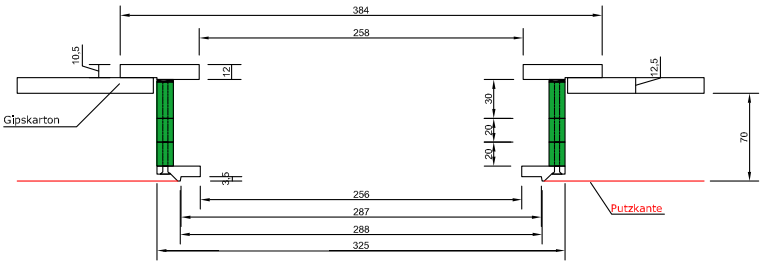

Sonance VX/VXQ 8" Distance ring set

SKU	1006870
Dimensions	217/191 × 70 mm
Applications	for double-layered ceilings with a total thickness of 70 mm

B-SYSTEM GmbH
Wilhelmstr. 20-5
D-78652 Deisslingen

Phone: +49 (0) 7420 889 889
E-mail: info@b-system.com
Web: www.b-system.com

B-SYSTEM INSTALLATION SOLUTIONS

B-SYSTEM
INSTALLATION SOLUTIONS

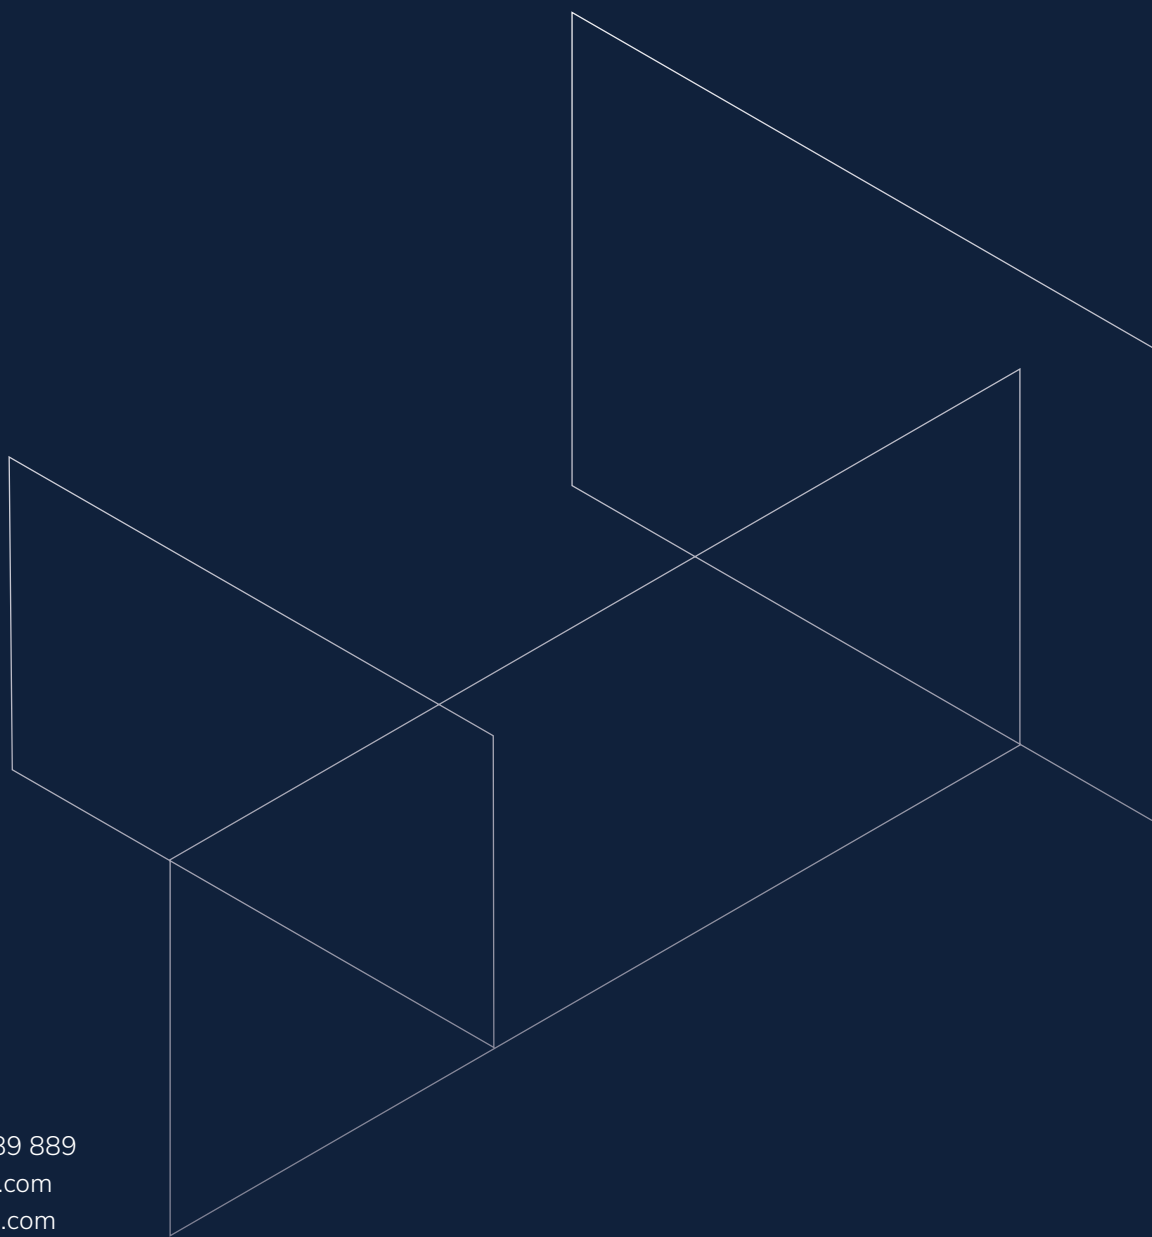

B-SYSTEM GmbH
Wilhelmstr. 20-5
78652 Deisslingen
Germany

Phone: +49 (0)7420 889 889
E-mail: info@b-system.com
Web: www.b-system.com

V:1-20251216