
B-SYSTEM
INSTALLATION SOLUTIONS


FlushFit

Sonance

Installation

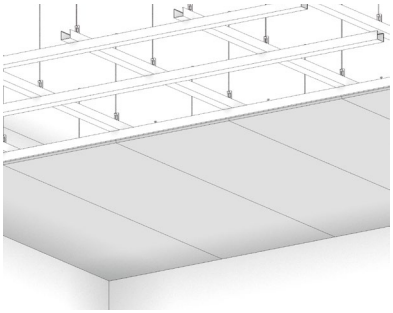

Ceiling

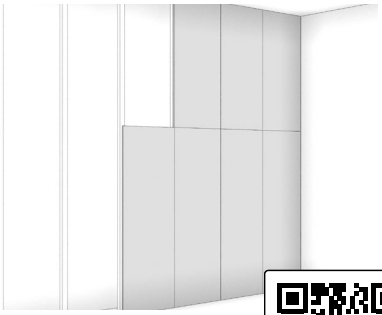


Wall

Installation Video






Adapter (2 parts)




Ring (1 part)





12 × screw 3,9 × 23mm

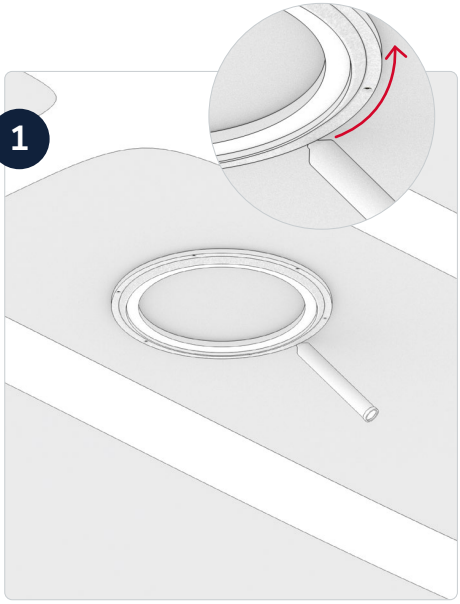

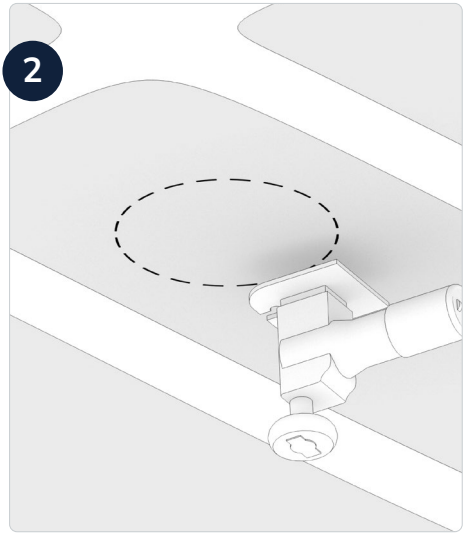


B-SYSTEM
INSTALLATION SOLUTIONS

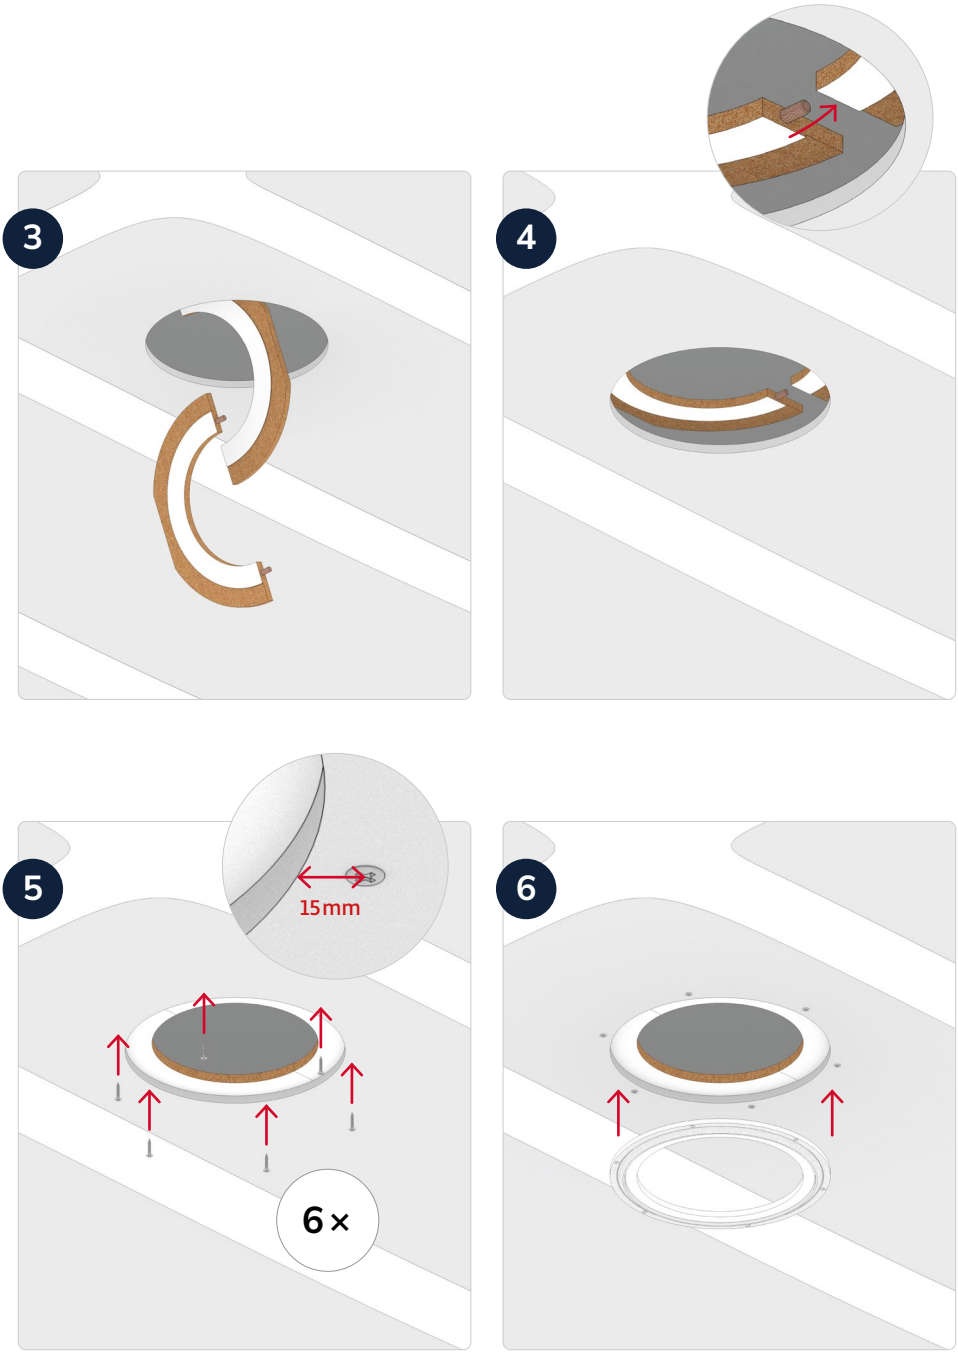

3
4
5
15mm
6×
6




7

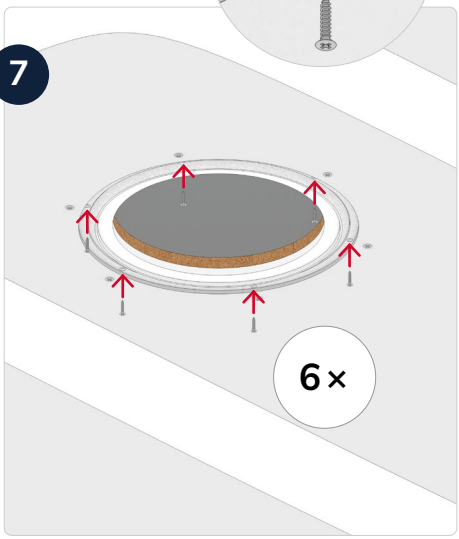


8

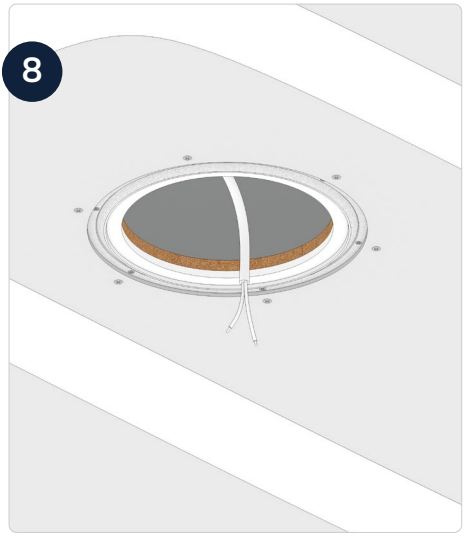


9

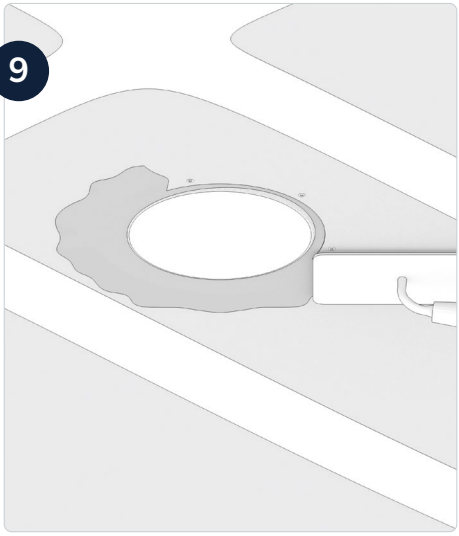


10

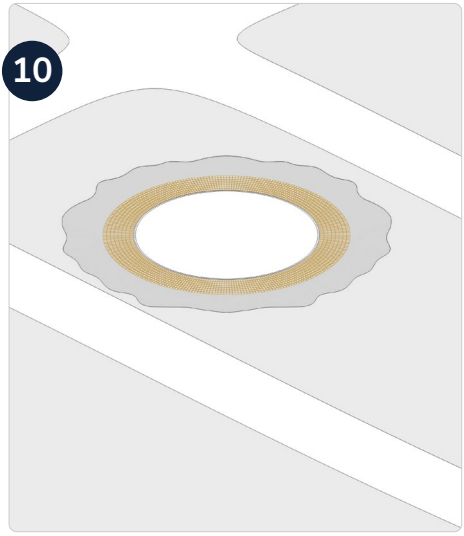


11

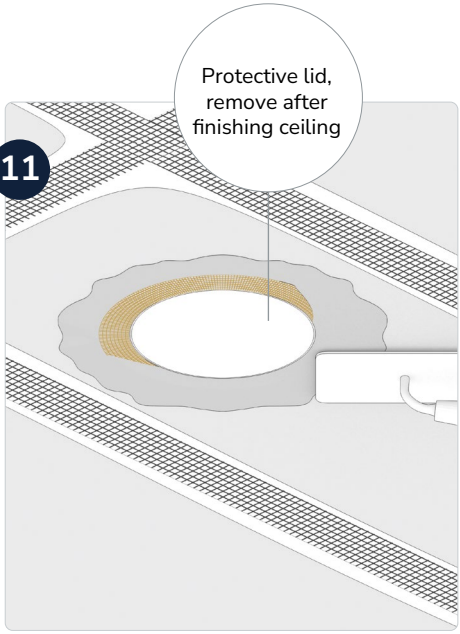


12

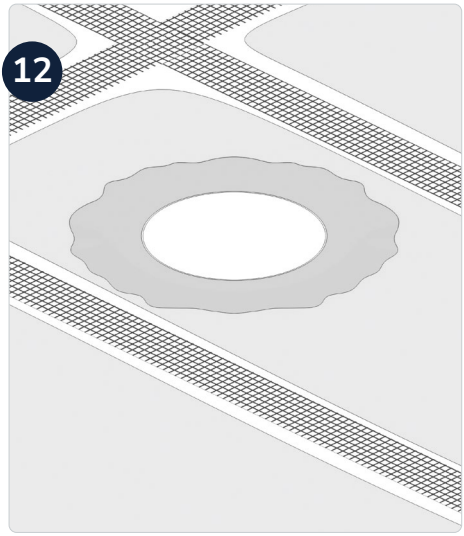


13

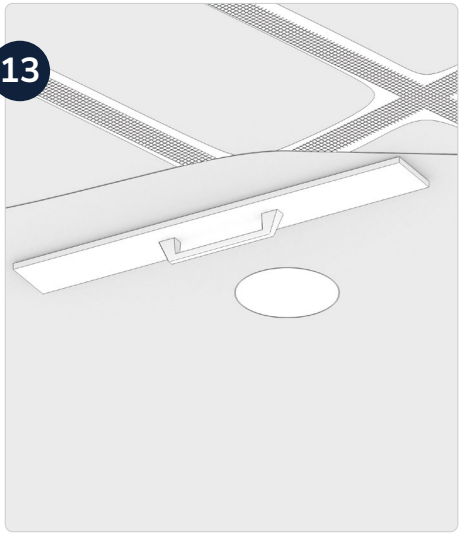


14

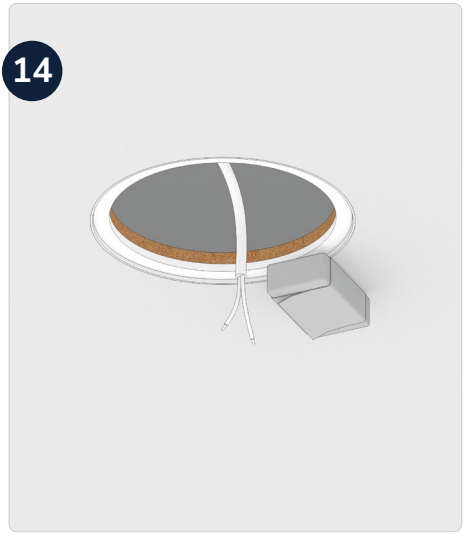


15

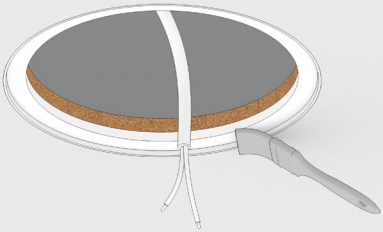


16

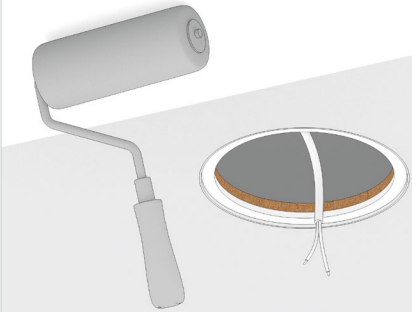


17

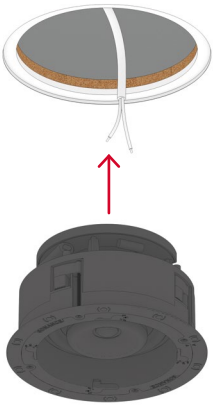

18



19

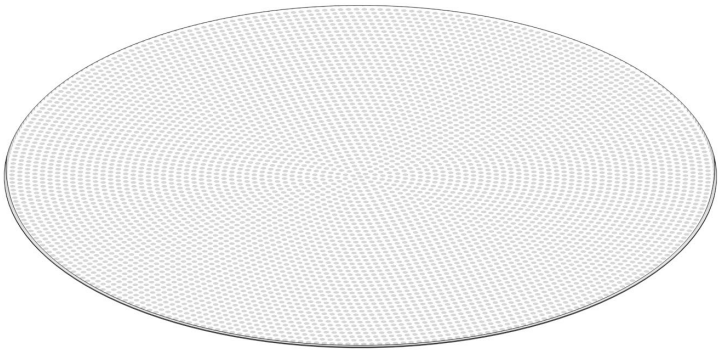

The FlushFit ring must be screwed into the 2-part adapter in the ceiling using the drywall screws supplied (12 ×)

The Sonance FlushFit adapter is designed for a standard 12.5mm plasterboard ceiling

If the ceiling construction is more than 12.5mm, (acoustic ceiling, MDF boards etc), there are optional available rings to bridge various needed heights (the exact ceiling thickness must be specified!)

You must use joint tape (net) or the supplied fleece into filling/spackling compound to bridge the gaps before applying final topping compound

B-SYSTEM
INSTALLATION SOLUTIONS

B-SYSTEM GmbH
Wilhelmstr. 20-5
78652 Deisslingen
Germany

Phone: +49 (0) 7420 889 889
Mail: info@b-system.com
Web: www.b-system.com

V: 1-20251203