

SLIM 5 SERIES EQUIPMENT RACK ENCLOSURE

Versatile Rack Frame System Satisfies Many Design Requirements

Specify a Slim 5 when multiple racks need to be joined or when open sides are desirable. Ships ready-to-assemble to reduce shipping costs.

Structural Features

Available in 20" and 26" useable depths to accommodate deeper equipment

Wide range of cabinet options makes rack adaptable to a multitude of different installation environments

Optional removable steel side panels provide security while genuine oak wood side panel option provides aesthetic appeal for home and studio installations

Heavy-duty 14-gauge steel top and bottom contribute to unsurpassed rigidity of rack design

Standard front and rear fixed 11-gauge, 10-32 threaded rackrail with marked rackspace increments to speed equipment mounting

Optional casters can be bolted directly to bottom of rack or concealed in skirted base

Unique mechanically interlocking corner joint is central to each unit's exceptional strength and eases assembly

Bolt-together design allows for knock down shipment via UPS

2" and 4" top and bottom electrical knockouts in rear of rack for cable pass-through

UL Listed in the US and Canada

aesthetically pleasing silver or black anodized trim panels available



unique mechanically interlocking corner joint provides superior strength

Custom sizes available, please call for details.



26" deep Slim 5 shown with granite gray steel side panels



shown with wood side panels and plexiglass front door

Telescoping Lacer Bars available for enhanced cable management, see pgs. 88--89



20" Useable Depth Part #	26" Useable Depth Part #	Racking Height	Overall Height	Weight Capacity	Recommended Power
5-43	5-43-26	75 1/4" (43 space)	79"	400 lbs.	N P T
5-37	5-37-26	64 3/4" (37 space)	68 1/2"	400 lbs.	G J N
5-29	5-29-26	50 3/4" (29 space)	54 1/2"	400 lbs.	E G J
5-21	5-21-26	36 3/4" (21 space)	40 1/2"	400 lbs.	E G
5-14	5-14-26	24 1/2" (14 space)	28 1/4"	400 lbs.	C
5-8	5-8-26	14" (8 space)	17 3/4"	400 lbs.	C •

See pgs. 94-107 for complete list of power products.
 • Requires PB-XS to mount power strip, see pg. 98.

Requires PB-5A to mount power strip, see pg. 98.

Zero Space Rackshelf



SH-5A

zero space full depth front and rear mount SH Series rackshelf, see pg. 124

Distributed by Multicom, Inc.

1076 Florida Central Parkway, Longwood, FL 32750

www.multicominc.com Toll free: 800.423.2594 Phone: 407.331.7779 Fax: 407.339.0204 multicom@multicominc.com

TIA/EIA COMPLIANT, UL LISTED

A&E SPEC. # 96-037

SLIM 5 SERIES EQUIPMENT RACK ENCLOSURE OPTIONS

Casters casters add 3 7/8" to overall cabinet height

SW set of 4 commercial grade casters	SWR set of 4 fine floor casters	5WL set of 4 commercial grade locking casters	5WLR set of 4 locking fine floor casters	CBS-5 skirted base with 4 commercial grade non-locking casters, fits 20" depth models; CBS-5-26 fits 26" depth models	CBS-5R skirted base with 4 fine floor non-locking casters, fits 20" depth models; CBS-5-26R fits 26" depth models

Door Options, Side Panels, Rear Access Pans, Rear Rackrail

Rack Part #	Solid Front Door	Plexi Front Door	Steel Side Panels, Pair	Wood Side Panels, Pair	Rear Access Pans	Adjustable "Split" Rear Rackrail	Cable Chase 3" wide*
5-43	DO-5-43	DOP-5-43	SP-5-43	WSP-5-43	RAP43	5AR43	5CC43
5-37	DO-5-37	DOP-5-37	SP-5-37	WSP-5-37	RAP37	5AR37	5CC37
5-29	DO-5-29	DOP-5-29	SP-5-29	WSP-5-29	RAP29	5AR29	5CC29
5-21	DO-5-21	DOP-5-21	SP-5-21	WSP-5-21	RAP21	5AR21	5CC21
5-14	DO-5-14	DOP-5-14	SP-5-14	WSP-5-14	RAP14	5AR14	5CC14
5-8	DO-5-8	DOP-5-8	SP-5-8	WSP-5-8	RAP8	5AR8	5CC8
5-43-26	DO-5-43	DOP-5-43	SP-5-43-26*	WSP-5-43-26	RAP43	5AR43-26	5CC43-26
5-37-26	DO-5-37	DOP-5-37	SP-5-37-26*	WSP-5-37-26	RAP37	5AR37-26	5CC37-26
5-29-26	DO-5-29	DOP-5-29	SP-5-29-26*	WSP-5-29-26	RAP29	5AR29-26	5CC29-26
5-21-26	DO-5-21	DOP-5-21	SP-5-21-26*	WSP-5-21-26	RAP21	5AR21-26	5CC21-26
5-14-26	DO-5-14	DOP-5-14	SP-5-14-26*	WSP-5-14-26	RAP14	5AR14-26	5CC14-26
5-8-26	DO-5-8	DOP-5-8	SP-5-8-26*	WSP-5-8-26	RAP8	5AR8-26	5CC8-26

*Suffix part number with GY for granite gray finish. *Custom width cable chases available, please call for details.

Power Distribution and Lighting



vertical and rackmount power and lighting available, please see pgs. 94-107

Trim Panels




Part #	Finish
5-CAVTRIM	silver brushed and anodized
5-BAVTRIM	black brushed and anodized

top and bottom trim panels available to match the finish of the products mounted within the enclosure

Adjustable "Split" Rear Rackrail

Facilitates rear hanging of equipment
Permits panels to be "mid-mounted"
All brackets, rails and hardware included
Cable chase kit required when using this option with ganged enclosures
Works with steel side panels only; will not accommodate wood side panels




SAR37 installed on 5-37

Installation and Ordering Notes

Wood Side Panels are made using genuine oak and are 1/2" thick. Will not work when using split rear rackrail options. WUSS and SH Series shelves need to be installed prior to installation of wood side panels, which conveniently lift off.	Removable Steel Side Panels are vented top and bottom with recessed lift handles and internal locking clips. Made from 18-gauge steel and finished in a durable black textured powder coat, each side panel adds 5/8" per side to overall enclosure width. Side panels for 26" deep Slim 5 also available with granite gray finish.	Doors are capable of being installed with a right or left swing and are equipped with a cam keylock and attractive flush handle. Requires the use of a cable chase when used in multi-bay installations. Doors provide 1 1/2" clearance.	Rear access pans feature a unique no-hinge "tip-out lift-off" design with a laser knockout for cable pass-through on the bottom. Securing keylock included.

Dimensions

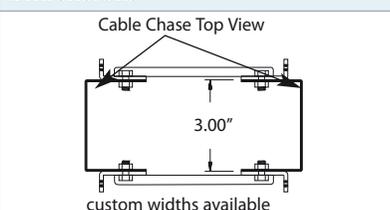

Trim Strips

add the finishing touch to any installation, see pg. 120



without trim strip installed with trim strip installed

Distributed by Multicom, Inc.

1076 Florida Central Parkway, Longwood, FL 32750

www.multicominc.com Toll free: 800.423.2594 Phone: 407.331.7779 Fax: 407.339.0204 multicom@multicominc.com