

SONANCE

VISUAL EXPERIENCE ULTRA THIN LINE SPEAKER QUICKSTART GUIDE

BOX CONTENTS

- Quickstart Guide
- (1) VX52R UTL Speaker
- VX 6" Round Cutout Template

INSTALLATION

Sonance Visual Experience Performance Series Speakers feature an exclusive integral RotoLock® mounting system for quick mounting directly into existing walls and ceilings.

1. Follow the steps outlined in the cutout template to trace and cut the speaker opening.
2. Strip 1/4" – 1/2" (6mm – 13mm) of insulation from each speaker lead and twist the strands or tin the exposed wire with solder to ensure that there are no stray strands.

NOTE: Stray strands that touch each other can cause a short circuit that can damage the amplifier.

3. The speaker's connector posts are spring-loaded. Push the top of each connector post down to open the connector and insert the exposed wires into the holes in the posts (see Figure 1).

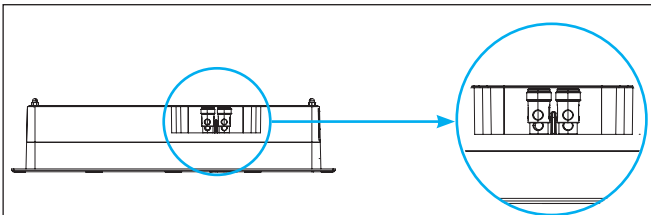


Figure 1: Connect Speaker Wire to Speaker Terminals

4. The speaker's positive post is labeled with a red dot; the negative post is labeled with a black dot.
5. After making all connections, double-check that you connected amplifier "+" to speaker "+" and amplifier "-" to speaker "-".
6. Make sure all the Roto-Lock toggle feet are retracted so that they are tucked within the speaker frame so they will fit into the mounting hole's border (see Figure 2).

NOTE: The Roto-Lock system can accommodate a wall material thickness of 0.94" (23.88mm).

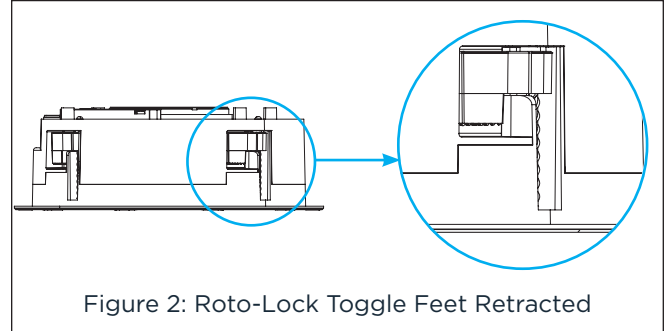


Figure 2: Roto-Lock Toggle Feet Retracted

7. Insert the speaker into the mounting hole and tighten the four screws on the front of the speaker baffle (see Figure 3).

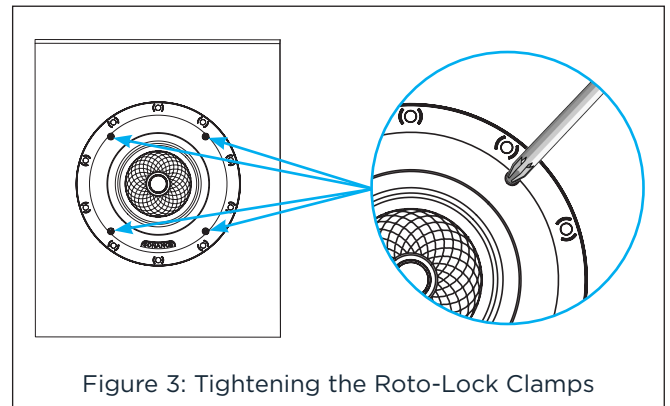


Figure 3: Tightening the Roto-Lock Clamps

8. The Roto-Lock clamps will automatically rotate into position and begin clamping the speaker.

IMPORTANT: Always use low torque settings when using a screw gun; never over tighten.

NOTE: Adjusting the tension of the Roto-Lock clamps so that the speaker frame is flat will help ensure that the grille contacts the wall all the way around the speaker for a proper fit.

9. Attach the grille to the speaker. Sonance Visual Experience Series speakers feature magnetic grilles. The grille will secure in place when aligned with the speaker face.



Scan QR Code to view the Visual Experience Installation Video to learn more.