

**NORITZ**  
TANKLESS WATER HEATERS

# NRCR


NORITZ RESIDENTIAL CONDENSING RECIRCULATION

**NRCR**  
**15**  
YEAR  
WARRANTY

FEATURING  
**INTEGRATED  
RECIRCULATION PUMP**

## RE CIRCULATION IMAGINED

The Noritz NRCR offers the latest cutting edge recirculation technology in a tankless water heater. This unit is equipped with high quality stainless steel heat exchangers for extreme corrosion and thermal stress resistance, giving your tankless a longer lifespan. In addition, a recirculation pump comes integrated with the unit to give you hot water faster and without the wait.




### HIGH QUALITY STAINLESS STEEL HEAT EXCHANGERS

The NRCR features a 15 year warranty on its heat exchangers, which are composed of high quality stainless steel and designed for easier serviceability.



### INTEGRATED RECIRCULATION PUMP

Built with an integrated pump allowing a 1/2" loop with a length of up to 200 feet (or 3/4" up to 500 feet), the longest in the industry.



### NEW SUPER LOW BTU MODE

An industry first, the NRCR's revolutionary burner control eliminates issues with high incoming water temperature in the summer by reducing effective BTU output to less than 10 KBTU.



### BEST-IN-CLASS EFFICIENCY

With a UEF rating of 0.97, the NRCR helps reduce harmful emissions by featuring one of the best thermal efficiencies in the tankless market.

# KEY FEATURES

## HIGHEST GRADE HEAT EXCHANGERS


Composed of an updated stainless steel and designed for better corrosion and heat shock resistance.

## INTEGRATED RECIRCULATION PUMP

Built with an integrated pump for faster hot water when your home needs it.

### PLUS

Now you can activate your pump using **motion activation** and other wireless accessories. (sold separately)

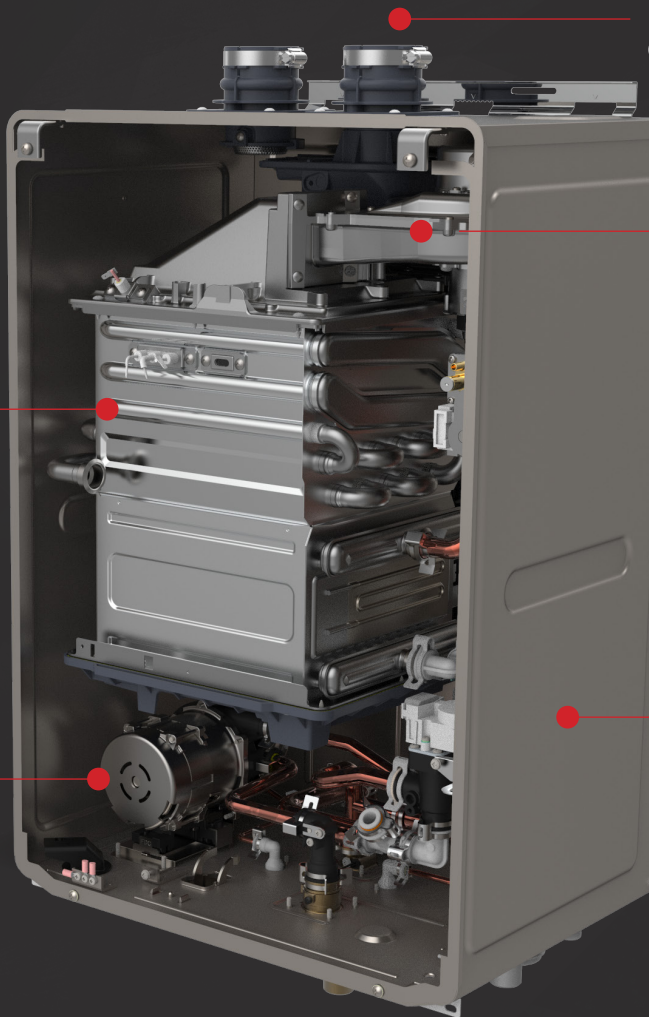

## FLEX VENT COMPATIBLE

The only unit with a pump on the market that is flex vent capable.

## ULTRA HIGH EFFICIENCY


Featuring a 0.97 UEF rating, one of the best energy factors in the tankless market.

## SUPER LOW BTU MODE

The NRCR's new super low BTU mode eliminates temperature fluctuations with improved burner control.

## FEATURE: CROSSOVER MODE

Is your home missing a return line? Now you can experience home recirculation with the NRCR's **Crossover Mode**. Utilizing our **Crossover Kit** (Item# CSV-BPK, sold separately), you can enjoy the full benefits of a recirculation line without the need to install additional piping in your home.

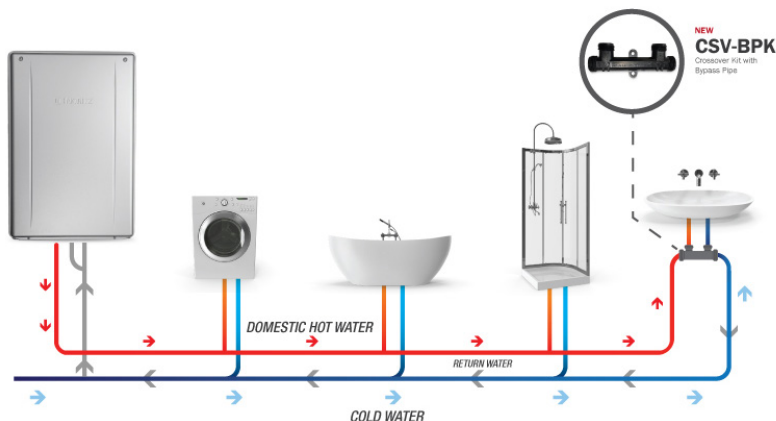

## ADDITIONAL FEATURES

Wireless Capability  
Improved Smart Scheduling Interface  
CA Title 24 Compliant  
Heat Shrink Durability

Model		NRCR92DV	NRCR111DV
<b>GQ Reference Number</b>		GQ-C2660WXQ-FF US LP GQ-C2660WXQ-FF US NG	GQ-C3260WXQ-FF US LP GQ-C3260WXQ-FF US NG
<b>BTU Input Range</b>		18,000 - 165,000	18,000 - 199,900
<b>Min / Max Flow Rate</b>		0.5 GPM - 9.2 GPM	0.5 GPM - 11.1 GPM
<b>Flow Rate at ΔT</b>	30 °F	9.2 GPM	11.1 GPM
	45 °F	7.1 GPM	8.7 GPM
	80 °F	4.0 GPM	4.9 GPM
<b>Weight</b>		73 lbs.	
<b>Connection Sizes</b>	<b>Water Inlet</b>	3/4"	
	<b>Hot Water Inlet</b>	3/4"	
	<b>Gas Inlet</b>	3/4" (1/2" up to 60ft.)	3/4" (1/2" up to 40 ft.)
	<b>Condensing Drain</b>	1/2" Threaded	
<b>Freeze Protection</b>		Yes, pump circulation + resistance heat	
<b>UEF</b>		<b>0.97</b>	
<b>Warranty</b>		<b>15 YEAR WARRANTY ON HEAT EXCHANGER</b> , 5-year warranty on parts & 1-year reasonable labor	
<b>Temperature Settings</b>	<b>°F Mode</b>	100-140° (In 5° Intervals) (9 Options)	
	<b>°C Mode</b>	37-48°C (In 1°C Intervals), 50-60°C (In 5° Intervals) (15 Options)	
<b>Recirc Lengths</b>		200 feet (1/2") / 500 feet (3/4")	
<b>Venting Style</b>		2" or 3" PVC or Flex Vent	
<b>Wireless Compatible</b>		<b>Yes</b>	