


## MULTIPLE RECIRCULATION MODES

Internal or External

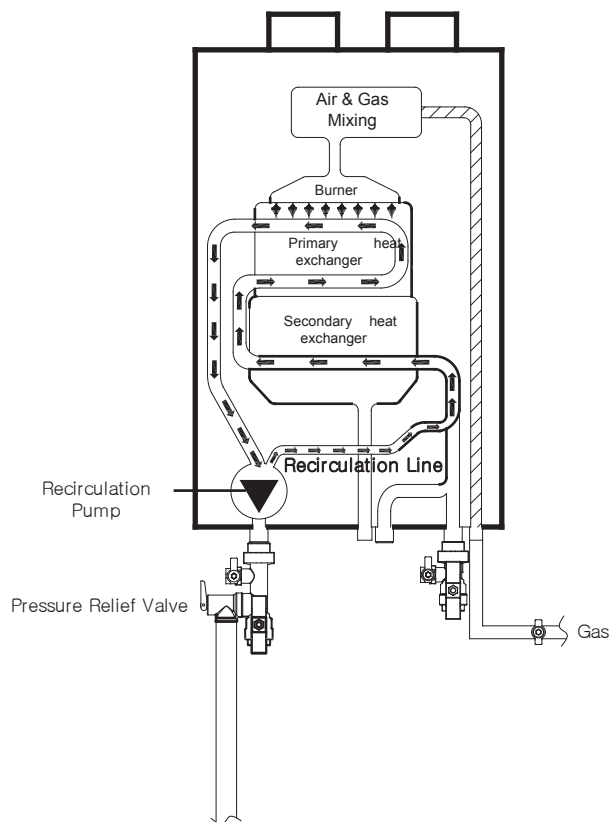

**GET HOT WATER FASTER**

## REMOTE CONTROL.

Built-in remote control allows for greater ease of use and functionality. With smart learning, the NRCP adapts to your hot water needs



**LEARN MORE**  
ABOUT WHAT NORITZ OFFERS  
[WWW.NORITZ.COM](http://WWW.NORITZ.COM)



**NORITZ**

The Simple Comforts of Life

HQ: 11160 Grace Avenue, Fountain Valley, CA 92708  
2016 FEB © 2016 NORITZ AMERICA® CORP. ALL RIGHTS RESERVED. LT0036



# NRCP

**BUILT IN RECIRCULATION PUMP**




**Get Hot Water Faster and Smarter**

**NORITZ**  
The Simple Comforts of Life

# RECIRCULATION WITH THE QUALITY YOU EXPECT



**INTERNAL  
RECIRCULATION PUMP**



## RECIRCULATION.

With the convenience and power of a built-in recirculation pump, you get hot water smarter and faster.


Efficient



Built in Recirculation Pump



Superior Stainless  
Steel Heat Exchangers



Built In Remote Control



2" or 3" PVC, CPVC, or PP



- 2" or 3" PVC, CPVC, PP Venting Options
- Superior Grade Stainless Steel Heat Exchangers
- Gas & Water Leak Detection
- Quick Connect Capable
- Common Venting Capability
- Customizable Internal & External Recirculation
- .95 Energy Factor
- High Elevation (up to 10,000 ft)

Model Name		NRCP982-DV	NRCP1112-DV
BTU Input Range		18,000 - 180,000	18,000 - 199,900
Max Flow Rate - Min Flow Rate		10.1 GPM - .5 GPM	11.1 - .5 GPM
Flow Rate at $\Delta T =$	35 °F	9.6 GPM	10.6 GPM
	45 °F	7.8 GPM	8.6 GPM
	80 °F	3.8 GPM	4.7 GPM
Vent Line	2" PVC, CPVC, PP	Up to 50 FT.	
	3" PVC, CPVC, PP	Up to 100 FT.	
Venting - SV Conversion		CONVERSION KIT REQUIRED	
Weight		85 LBS.	
Pressure Drop		15 PSI @ 6 GPM	
Gas Supply Pressure		NG: 3.5" - 10.5" LP: 8.0" - 14.0"	
Connection Sizes	Water Inlet	3/4"	
	Hot Water Inlet	3/4"	
	Gas Inlet	3/4"	
	Condensing Drain	1/2"	
Max External Recirculation Loop	1/2" LINE	200 FT.	
	3/4" LINE	500 FT.	
Energy Factor		.95 EF	
Warranty		12 YRS. HEAT EXCHANGER, 5 YRS. PARTS, 1 YR. LABOR	
Temperature Settings		100 - 140 °F (IN 5 °F INTERVALS)	