

NRCR
What's Inside

Best-In-Class Efficiency

With a UEF rating of 0.97, the NRCR helps reduce harmful emissions by featuring one of the best thermal efficiencies in the tankless market.

High Quality Stainless Steel Heat Exchangers

The NRCR features a 15 year warranty on its heat exchangers, which are composed of high quality stainless steel and designed for easier serviceability.

Integrated Recirculation Pump

Built with an integrated pump allowing a 1/2" loop with a length of up to 200 feet (or 3/4" up to 500 feet), the longest in the industry.

Plus! Now you can activate your pump using motion activation and other wireless accessories. (sold separately)

Get the most out of your NRCR

Pair your NRCR with certified Noritz accessories to bring ultimate comfort and control out of your unit.



Crossover Kit

CSV-BPK

Our crossover kit brings recirculation to homes without a return line. Set your NRCR to crossover mode after installation and your home is ready for faster, hot water.



Wireless On-Demand Button Kit

WLB

Get hot water at the touch of a button throughout your home. Activate your NRCR's recirculation mode with our wireless on-demand button kit.



Outdoor Vent Kit

VC-6

Our outdoor vent gives homeowners even more space savings by allowing for outdoor installations.



Wireless Motion Sensor

WLB-MS

Activate your NRCR on-demand recirculation mode from anywhere in your home when you come in range of the sensor.



Commercial Remote

RC-9018M

Unlock additional programing options and functions for your NRCR with our commercial remote.



Extra WLB Transmitter

WLB-ET


Additional transmitter for WLB wireless on-demand button kit.

NORITZ
TANKLESS WATER HEATERS

The Technology Leader In Hot Water Heating

Noritz has been an innovator in the water heating industry for over 60 years. We introduced the first modern, electronically controlled tankless water heater in 1981 and we remain the leader in energy savings and superior hot water delivery today.

NRCR
SCAN HERE to
Register Your NRCR



NORITZ
TANKLESS WATER HEATERS

NRCR
15
YEAR
WARRANTY

ALWAYS HOT
NRCR

NORITZ RESIDENTIAL CONDENSING RECIRCULATION

Methods of Recirculation

Featuring the latest in recirculation technology, the NRCR offers a variety of new modes to help keep your home with endless hot water while intelligently adapting to your usage and more.



Full Recirculation

Built with an integrated pump, the NRCR's recirculation mode brings your home hot water faster than ever by utilizing your dedicated return line.



Includes Integrated Recirculation Pump




Crossover Mode

Is your home missing a return line? Now you can experience home recirculation with the NRCR's Crossover Mode.



Utilizing our Crossover Kit (Item# CSV-BPK, sold separately), you can enjoy the full benefits of a recirculation line without the need to install additional piping in your home.

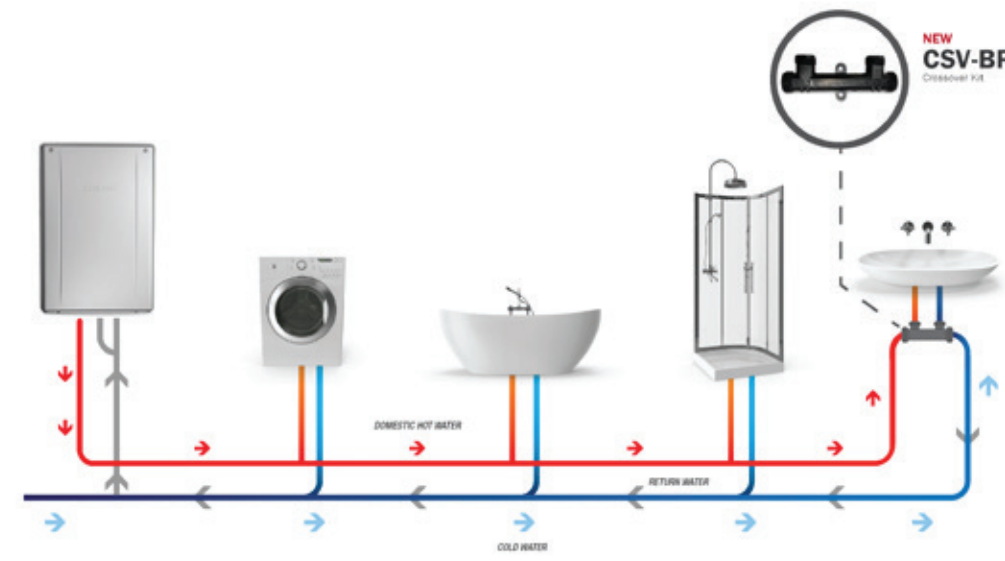*When in crossover mode, minimum set temp is 120°F



Built for Performance

No more waiting for hot water. The Noritz NRCR can provide you with faster hot water wherever and whenever you need it. It does this by recirculating the water through your plumbing system, so hot water is always available in whatever part of the house that you may need it. The best part is, Noritz can provide this solution regardless of your current plumbing configuration.


Tech Specs			
Model		NRCR92DV	NRCR111DV
GQ Reference Number		GQ-C2660WXQ-FF US LP GQ-C2660WXQ-FF US NG	GQ-C3260WXQ-FF US LP GQ-C3260WXQ-FF US NG
BTU Input Range		18,000 - 165,000	18,000 - 199,900
Min / Max Flow Rate		0.5 GPM - 9.2 GPM	0.5 GPM - 11.1 GPM
Flow Rate at ΔT	30 °F	9.2 GPM	11.1 GPM
	45 °F	7.1 GPM	8.7 GPM
	80 °F	4.0 GPM	4.9 GPM
Dimensions		27" (Height) x 18.5" (Width) x 14.1" (Depth)	
Weight		73 lbs.	
Connection Sizes	Water Inlet	3/4"	
	Hot Water Inlet	3/4"	
	Gas Inlet	3/4" (1/2" up to 60ft.)	3/4" (1/2" up to 40 ft.)
	Condensing Drain	1/2" Threaded	
Freeze Protection		Yes, pump circulation + resistance heat	
UEF		0.97	
Warranty		15 YEAR WARRANTY ON HEAT EXCHANGER, 5-year warranty on parts & 1-year reasonable labor	
Temperature Settings	° F Mode	100-140° (In 5° Intervals) (9 Options)	
	° C Mode	37-48°C (In 1°C Intervals), 50-60°C (In 5° Intervals) (15 Options)	
Recirc Lengths		200 feet (1/2") / 500 feet (3/4")	
Venting Style		2" PVC (65 feet), 3" PVC (150 feet) or Flex Vent (35 feet)	

Enhanced Modes for Maximum Comfort

Equipped with a variety of customizable modes, the Noritz NRCR helps you simplify and personalize your home's hot water usage.

Steady BTU Mode

The NRCR comes equipped with a new burner control feature which eliminates issues with high incoming ground water temperature. By reducing BTU output to less than 5 KBTU, this mode prevents water temperature fluctuations while keeping your tankless running efficiently.

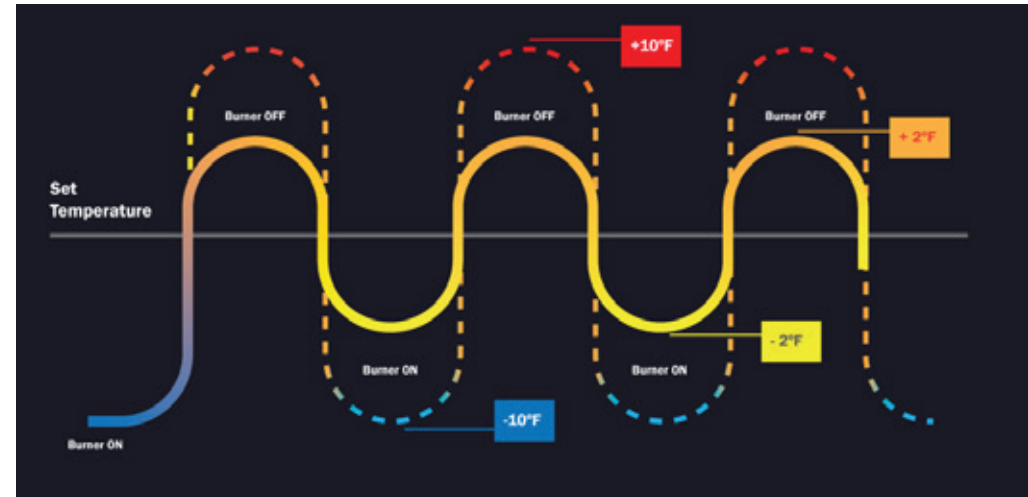

Auto Learning Mode

The NRCR's auto learning mode intelligently keeps track of your hot water usage. It then uses this data to get you hot water faster based on your previous run times, eliminating wait times even further.



IHK-GB



IHK-RS

On-Demand Mode

Get your NRCR up and running at the touch of a button or flip of a switch. Simply install our on-demand accessories and your pump will begin circulating instant hot water throughout your home.



Scheduling Mode

Using our RC-9018M remote controller (Sold separately), the NRCR gives homeowners complete control of pump scheduling, allowing custom run times to fit your hot water demands.



Additional Modes Available

Paired with our included RC-7651M-A remote controller, the NRCR lets homeowners customize their heater with additional modes. From normal recirculation, crossover, and on-demand modes, the NRCR gives homeowners control of their hot water with our easy-to-use remote.