

EZ SERIES

Unmatched Performance. Now With The Industry's Best Warranty

The Noritz EZ Series is the industry leader in tankless. Featuring top mounted connections to accommodate any installation scenario and manufactured with the highest quality materials, the EZ Series line is built to keep your home with hot water for years to come. Our industry-leading 25 year warranty is also just another reason why the EZ Series is the preferred choice for homeowners.



*EZTR50/75 Bundles, EZ98, and EZ111 models only.
Visit WWW.NORITZ.COM/EZWARRANTY for more information.

FEATURES



High Grade Stainless Steel Heat Exchangers

Greater resistance to corrosion and buildup, keeping your system running for years to come.



Altitude Up To 10,000 Feet

Gives consumers the freedom to install at higher altitudes.



Top Mounted Water Connections

Top mounted connections allow for previous water lines to be reconnected faster.




Wireless Capability

Combined with the Noritz Connect app, users have control of all the heater functions and diagnostic tools.



Quick Connect

Get your hot water up and running faster with our EZ installation process.

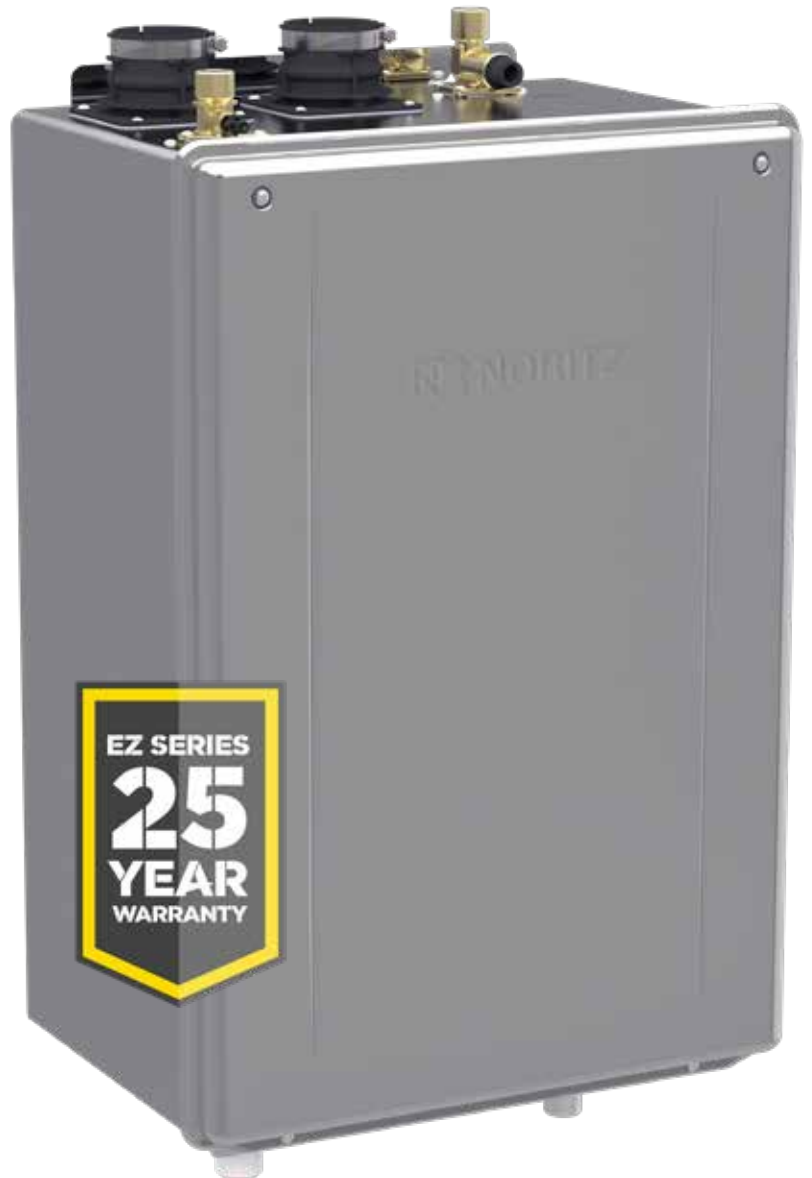

Top Mounted Water Connections

Top mounted connections allow for previous water lines to be reconnected faster.

Dual High Grade Stainless Steel Heat Exchangers

Featuring greater resistance to corrosion and buildup, keeping your system running for years to come.

1/2" Gas Line Compatible

Compatible with most installations, the 1/2" gas line is found underneath the unit for a more convenient install.

Quick Connect


Get your tankless up and running faster with our EZ installation process.

New Steady BTU Mode

SBTU mode eliminates issues with high incoming water temperature in the summer by reducing effective BTU output to less than 5KBTU, preventing water temperature fluctuations while keeping your tankless running efficiently.

Wireless Capability

Combined with the Noritz Connect app, users have control of all heater functions and diagnostic tools.

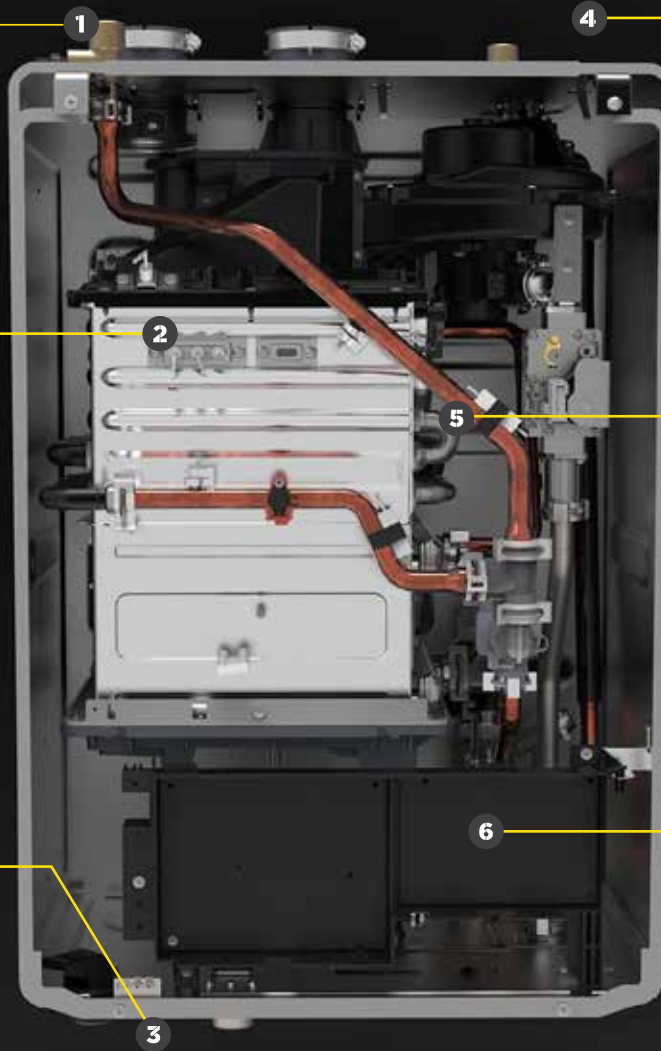

TECHNICAL SPECIFICATIONS

	PVC, 2" Flex, OD or SV Convertible	
Model	EZ98	EZ111
GQ Reference Number	GQ-C2860WX-FF US	GQ-C3260WX-FF US
Vent Type	Convertible Vent	Convertible Vent
Dimensions (Inches)	27.0 x 18.5 x 14.1	27.0 x 18.5 x 14.1
Weight (lbs)	70 lbs.	70 lbs.
Min. / Max. Btuh	18,000 - 180,000	18,000 - 199,900
UEF	0.95	0.95
Max. Hot Water Capacity	9.8 GPM	11.1 GPM
Water Inlet	3/4"	
Hot Water Outlet	3/4"	
Gas Inlet (1/2 in. capable)	3/4" (1/2 in. up to 50 ft.)	3/4" (1/2 in. up to 40 ft.)
Temp. Settings	100-140°F (In 5° intervals)	
Warranty	INDUSTRY LEADING 25 YEAR WARRANTY ON HEAT EXCHANGER. 5-year warranty on parts & 1-year reasonable labor	
Ultra Low NOx	Yes	
Quick Connect Capable	Yes	
Remote Included	Yes	
Min. / Max. Flow Rate	0.5 GPM / 9.8 GPM	0.5 GPM / 11.1 GPM
High Altitude Approved	Up to 10,000 ft.	
Indoor / Outdoor	Indoor / Outdoor	
Wireless Compatible	Yes	
Pump Kit Compatible	Yes	
EZTR / EZ Series Options		
Bundle	Yes (Model EZTR50)	Yes (Model EZTR75)

Versatile Venting For Any Installation

The Noritz EZ Series adapts to your installation needs, providing professional installers and their homeowner-customers with a wider range of tank-replacement opportunities.



EZ-SV
Single Vent
(With SV-CK-2-1)



EZTR
2" Flex Vent
(With EZ2-FVK1 / 2 and EZ2-CK)



EZ-DV
Direct Vent



EZ-OD
Outdoor
(With VC-6-1)