



# NCC199CDV PRO



## TRUE COMMERCIAL TANKLESS

Designed for delivering exceptional hot water performance, our new NCC199CDV Pro line brings even more features and benefits to our most popular commercial tankless. This includes improved efficiency, built-in display, Bluetooth® connectivity, and more - making our flagship commercial tankless the first choice for businesses looking for faster, reliable hot water delivery.

## FEATURES AND BENEFITS

### GREATER EFFICIENCY



The NCC199CDV Pro offers an improved **UEF rating of 0.98**, making it more efficient than previous models by generating less harmful emissions.

### BLUETOOTH® CONNECTIVITY



Now the CDV Pro comes equipped with Bluetooth® connectivity, giving users more control of heater functions including timers, temperature, and more.

### BUILT-IN DISPLAY



The new built-in display gives owners visibility to their heater's temperature, status, as well as error codes.

### UPDATED COVER DESIGN



The CDV Pro features a new flange-less design with snap locks for easier component access.

### AVAILABLE IN ONE GAS TYPE



Natural Gas (NG) is the default gas type, but if liquid propane (LP) is preferred all units come with a gas conversion kit that helps to easily update your unit's gas type.

### GREATER QUICK CONNECT CAPABILITY




The new CDV Pro can now quick connect up to 6 units, compared to 2 of earlier models.

## CMK-BB4 SYSTEM

Utilizing 4 NCC199CDV Pro units



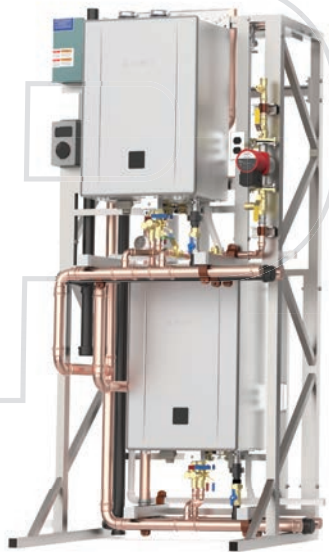

**TTS** SYNERGY  
S E R I E S



**CMK / CRK**  
QUICK COMMERCIAL MANIFOLD & RACK KITS



**HH** HYBRID HOT  
S E R I E S  
BY NORITZ

## CDV PRO UPGRADE AVAILABLE FOR ALL OUR COMMERCIAL SYSTEMS

All our award-winning commercial systems are engineered to work hand in hand with our NCC199CDV Pro tankless (sold separately). Each unit comes with a 10 year warranty and is built to handle the most demanding hot water needs.

### TECHNICAL SPECS

Specification		Model Number
Model Name		NCC199CDV Pro (GQ-C3261WZ-FF US NG)
Type	Installation	Indoor / Outdoor Wall Mounted
	Air Supply / Exhaust	Power Vented
Ignition		Direct Ignition
Warranty		10 year heat exchanger warranty / 5 year warranty on parts / 1 year reasonable labor
UEF		0.98 UEF
Operating Pressure		15 - 150 psi (Recommended 50 to 80 psi for maximum performance)
Dimensions		18.1" (w) x 26.1" (h) x 11.8" (d)
Weight		62 pounds
Water Holding Capacity		0.71 Gallon (2.7L)
Connection Sizes	Water Inlet	3/4" NPT
	Hot Water Outlet	3/4" NPT
	Recirculation Return	3/4" NPT
	Gas Inlet	3/4" NPT
	Condensate Drain	1/2" NPT
Power	Supply	120VAC (60Hz)
	Consumption	NG / LP: 105 W / 108 W
	Freeze Protection	114 W
	Maximum Current	4 Amps
Min. / Max. BTU/h		12,800 - 199,900
Max. Hot Water Capacity		8.7 GPM
Capacity Range		0.4 - 11.1 GPM
Temperature Settings	°F Mode	100-150°F (In 5°F Intervals), 160°F, 170°F, 185°F (14 Options)
	°C Mode	37-48°C (In 1°C Intervals) 50-85°C (In 5°C Intervals) (20 Options)
Materials		Primary / Secondary Heat Exchanger Stainless Steel Sheeting, Stainless Steel Tubing



**NEW**

## EZ START PLUS®

Mobile app for all Pro models

All CDV Pro models come equipped with Bluetooth® connectivity, providing users with more control of heater functions including pump timers, temperature settings, and more.

TO LEARN MORE, VISIT [NORITZ.COM/COMMERCIAL](https://www.noritz.com/commercial)