

rculating tankless with several exciting new tures. This includes improved efficiency, Blueto

n addition, the NRCR Pro also comes with a variety of recirculation options including full recirculation and crossover mode for homes without a return line These upgrades make our NRCR Pro the first choice for homeowners looking for faster, reliable hot water

# **Pro Features**

# → New Bluetooth® Connectivity

All NRCR Pro models come equipped with Bluetooth® connectivity, providing users with more control of heater functions including pump timers, temperature settings, and more.

# → Greater Efficiency

The NRCR Pro now offers an improved 0.98 UEF RATING, making it even more efficient than previous models while generating less harmful

# → Available in **One Gas Type**

Natural Gas (NG) is the default gas type on all NRCR Pro models but if liquid propane (LP) is preferred, all units come with a gas conversion kit that helps to easily update your unit's gas type.

# **⇒** Supports 2 **Crossover Valves**

The NRCR Pro supports use of 2 crossover valves (item #cCS-V, each sold separately) for homes without a return line.

# **⇒** Compact Design Simplifies **Installation Process**


The NRCR Pro installation process is now a breeze for contractors thanks to a reduction in overall weight and a more compact design. In addition, its new longer vent capability allows for greater installation options.

Model Number		NRCR92DV	NRCR111DV
GQ Number		GQ-C2661WXQ-FF US	GQ- C3261WXQ-FF US
Min. / Max. BTUh		12,800 - 165,000 BTU/h	12,800 - 199,900 BTU/h
Min. / Max Flow Rate		0.4 - 9.2 GPM	0.4 - 11.1 GPM
Max. Hot Water Capacity		30° Rise: 9.2 GPM	30° Rise: 11.1 GPM
Dimensions		18.1" (w) x 26.1" (h) x 11.8" (d)	
Weight		62 pounds	
Connection Sizes	Water Inlet	3/4" NPT	
	Hot Water Outlet	3/4" NPT	
	Recirculation Return	3/4" NPT	
	Gas Inlet	3/4" NPT	
	Condensate Drain	1/2" NPT	
Freeze Protection		Outdoor: -4°F	
UEF		0.98 UEF	
Warranty		<b>15 Year Heat Exchanger Warranty</b> 5 year warranty on parts / 1 year reasonable labor	
Temperature Settings	°F Mode	100-140°F (In 5°F intervals) (9 Options)	
	°C Mode	37-48°C (In 1°C intervals), 50-60°C (In 5°C intervals) (15 Options)	
Recirculation Lengths		200 feet (1/2") / 500 feet (3/4")	
Venting Lengths		2" PVC (75 feet), 3" PVC (150 feet), 4" (65 feet)	
Bluetooth® Compatible		Yes	



# **ECM Pump Comes Integrated**

The NRCR Pro uses a fully integrated **ECM pump** to keep hot water close to even the farthest outlet in the home, minimizing the wait and, therefore, the waste of unused potable water down the drain.

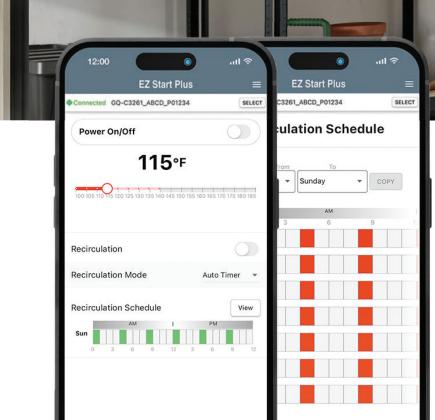

**Total Control of** 

Your Tankless

**Directly from** 

Introducing our EZ Start Plus® app,

available now for use with our NRCR Pro line of tankless water heaters.

**Your Phone** 



NORITZ RESIDENTIAL CONDENSING RECIRCULATIO

NORITZ\*

Built for Unmatched Recirculation Performance

# NEW

# EZ START PLUS°

Mobile app for iOS and Android

Our new EZ Start Plus® app gives users more control of their tankless water heater functions via Bluetooth®:

- Update Temperature Settings.
- Program Recirculation Scheduling.
- Quick Initial Setup Process.
- Tools for Quick and Easy Maintenance.
- · Easily Switch Between Recirculation Modes.
- · Check Unit Status and Error Codes.



**Scan Here to Download the** EZ Start Plus® app





MITTERNING



Phone: 1-866-766-7489

Tech Support Hours











Follow us on social media

# **Featured Modes and Accessories**

Designed for flexibility and control, the NRCR Pro comes equipped with a range of customizable modes that let you tailor your home's hot water usage to your exact needs.

## **Featured Mode**

# **Crossover Mode**

With the NRCR Pro's Crossover Mode, homes without a return line can now enjoy the benefits of recirculation. Simply utilize our crossover kit (item# CSV-BPK, sold separately) and get faster hot water without the need to install additional piping.

# CSV-BPK





**New for NRCR Pro** 

valves (item# cCS-V. each



# **Featured Mode**

# **Full Recirculation**

brings your home hot water faster than ever by utilizing your dedicated return line.



## **Featured Mode**



The NRCR Pro's revolutionary burner control eliminates issues with high incoming water temperature in the summer by reducing effective BTU output to less than 5 KBTU. This prevents water temperature fluctuations while keeping your tankless running efficiently.



Scan your phone here to watch our SBTU Mode explainer video






# \*\*\*\*\* \*\*\*\*\*\* -10° F

of unused potable water

down the drain.

# Inside the NRCR PRO

Equipped with a variety of features and customizable modes, the Noritz NRCR Pro helps you simplify and personalize your home's hot water usage.

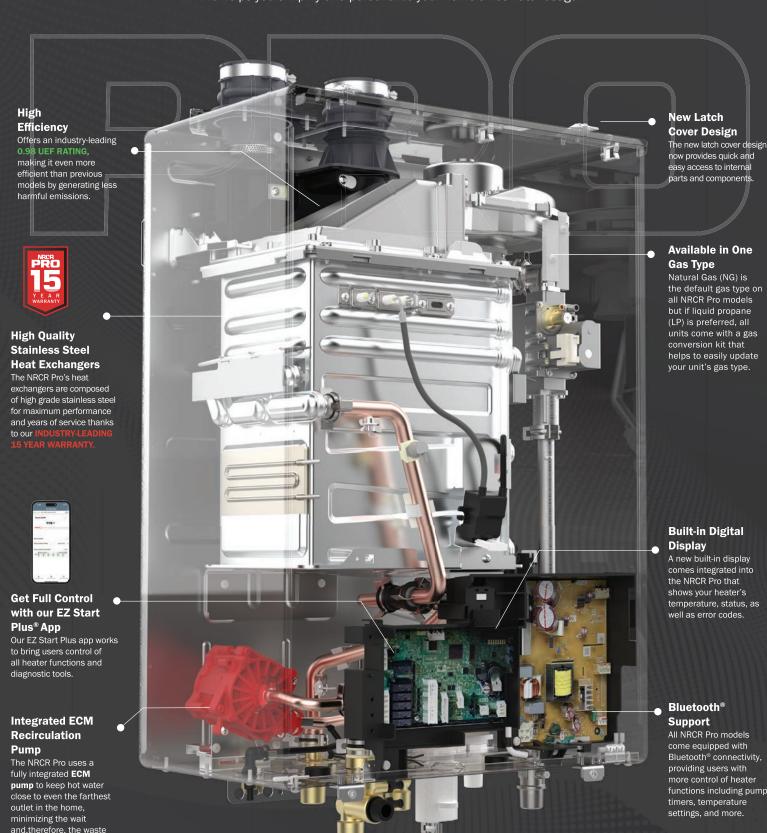

# **Accessories**

Get ultimate comfort and control out of your NRCR Pro when paired with any of our additional accessories.

# **No Roof Kit** NRK-1

The Noritz No-Roof Kit provides a new venting option by eliminating the need to climb onto the rooftop to complete your installation. The kit also comes with all materials needed, cutting down further install time and material waste.









## **Service Kit** SPK-EZ4

New Service kit for NRCR Pro models

Accessory	Description	Qty
3223302-В	O-Ring – High Temp P16	12
DTJD006	Water Filter Cap	3
EDGD101	Flow Sensor (GQ60)	1
EGBD032	Water Filter	3
EPAD001	Flow Sensor (EZ GQ59, CDV GQ59 & GQ60)	1
ETFD050	Bypass Servo (GQ59/GQ60)	1
ETFD051	Main Servo (EZ GQ59, CDV GQ59/GQ60)	1
FABH001	High Limit Switch - 194	1
FABH002	High Limit Switch - 320	1
FBMD011	Main Servo (GQ60)	1
SKJ71VZ	Ignition Plug w/ Gasket (GQ59 & NRCB)	1
SKJ72MT	Ignition Plug w/ Gasket (GQ60)	1
SKJ72N0	Screw Kit (GQ60)	1
SKJ72QD	Flame Lifting Rod (Flame Rod GQ60)	1
SKJ72Y9	Igniter Set w/ wires & sleeve (GQ60)	1
SKJ730E	Igniter Set w/ wires & sleeve (GQ59 & NRCB	1
FHCD041	Water Flow Sensor (EZ GQ61, NRCR GQ61)	1
EPAD002	Water Flow Sensor (NCC GQ61)	1
FFSD032	Water Filter (GQ61)	1
FHCD051	Main Servo (EZ GQ61, NRCR GQ61)	1
FCDD214	Main Servo (NCC GQ61)	1
SKJ73PC	Ignition Plug w/ Gasket (GQ61)	1
SKJ73PG	Igniter Set w/ wires & sleeve (GQ61)	1
FAQH002	High Limit Switch - 221 (NCC GQ59/GQ60/GQ61)	1
FHDH001	High Limit Switch - 198 (NCC GQ59/GQ60/GQ61)	1

# **Venting**

# 2" SV **Conversion Kit**

SV-CK-2-1

Our 2" single vent conversion kit upgrades direct vent (DV) installs to non-direct vent (SV) operation.



# **Outdoor Vent** Kit

VC-6-1

Our new plastic outdoor vent cap is now easier to install and features a new elegant design.



## **Wireless Push Buttons**

# **Wireless On-Demand Button Kit For NRCR Pro**

Our wireless on-demand button kit allows full utilization of the NRCR Pro's on-demand recirculation system. Endless hot water just got easier.

**Button Kit** 

Wireless

WLB-MS

**Motion Sensor** 





Activate the NRCR Pro's on-demand

recirculation mode with this Title 24 compliant wireless push button. Kit contents include 2 wireless transmitters wireless receiver, and a signal connector.

**Wireless On-Demand** 



1 x Receiver 2 x Transmitters

Activate your tankless water heater from anywhere in your home when you come in range of the sensor.



# **Extra WLB Transmitter**

WLB-ET

One additional transmitter for WLB wireless on-demand button kit.

## **Additional Accessories**

Item No.	Contents	Qty
cCS-V	Crossover Valve Kit	1
CSV-BPK	Crossover Branch Pipe Kit	1
EZ2-CK-1	Flex Vent 2" Conversion Kit	1
EZ2-FVK-1	2" Flex Vent Kit (25 ft.)	1
EZ2FVK-2-1	2" Flex Vent Kit (35 ft.)	1
NC-1W	Wall Hanging Residential Condensate Neutralizer Kit	1
IHK-GB	On Demand Button	1
IHK-RS	On Demand Switch	1
PC-11S	NRCR Pro Pipe Cover	1
PVC-#LPT	Low Profile Termination Vent	1