

NORITZ

THE BEST OF TANK + TANKLESS

HH

HYBRID HOT
SERIES
BY NORITZ®



The First Tankless And Tank Combo From Noritz.

**Now With The
New NCC199CDV Pro.**

Endless Hot Water. Quicker Recovery.

The Hybrid Hot Series by Noritz brings together the storage of a standard tank with the power and efficiency of a tankless to take on any commercial hot water demand.

Combined to meet the hot water requirements of businesses, the Hybrid Hot Series by Noritz utilizes the latest in tankless and tank storage technologies to create a powerful and reliable solution for business owners. The Hybrid Hot also offers common venting for multiple units to ensure endless hot water is always available.



Includes our industry-leading **10 Year Warranty**

on both the storage tank and our NCC199CDV Pro tankless unit.

Performance

Approved Gas Types	Natural Gas or Propane	
NCC199CDV Pro (GQ-C3261Z-FF US) Efficiency		0.98 UEF (For CDV Pro tankless)
	Ratings not certified by AHRI	96% Thermal Efficiency (For system)
First Hour Rating**	317 GPH	


**First hour rating is a calculation based on 100°F temperature rise, with recovery capacity plus 70% usable tank volume

Features



The Best of Tank and Tankless

With an endless supply of hot water, lower pressure drop, and no limitation of hot water flow rate, the Hybrid Hot Series by Noritz® combines features of both technologies to provide the most reliable hot water delivery system to date for commercial applications.



Continuous Hot Water Delivery

If your tank suddenly runs out of hot water, no need to worry. The Hybrid Hot Series by Noritz® can continue to provide hot water using the paired NCC199CDV Pro tankless even after your stored supply is depleted.*

*Hot water capabilities are limited



Faster Hot Water Recovery

The Hybrid Hot offers the best BTU possible at the quickest rate, providing businesses with energy savings and more. Thanks to its larger pump, hot water recovery speed with the Hybrid Hot is faster than other tank and tankless combinations.




Cement Lining

With no anode rod and a greater warranty than other tanks on the market, our tank also features cement lining for superior corrosion resistance.

Technical Specs

Model Number		NHH199100-1
Installation Location		Indoor
Appliance Type		NCC199CDV Pro (GQ-C3261Z-FF US) Tankless Water Heater paired with Insulated Storage Tank, Pump, and Controller
Weight		536 lbs (Product Weight) 642 lbs (Shipping Weight)
Working Pressure	Water	15 - 150 psi
	Gas	NG: 3.5 - 10.5" LP: 8.0 - 13.0"
Connection Size	Cold Water	NPT 1 1/2"
	Hot Water	NPT 1 1/2"
	Return (Recirc)	NPT 3/4"
	Gas	NPT 3/4"
Vent	Type	DV / SV
	Size	2" / 3"
	Max Length	2": 75' / 3": 150'
	Common Vent	Yes (Up to 12 Units)
Dimensions		H: 67 3/4" W: 28" D: 41.2"
Power Supply		120 VAC (60Hz)
Tank Capacity		119 Gallons (Cement Lined)
Min. / Max. BTUh		12,800 - 199,900 BTUh
Water Temperature Setting		100 - 185°F (37 - 85° C)

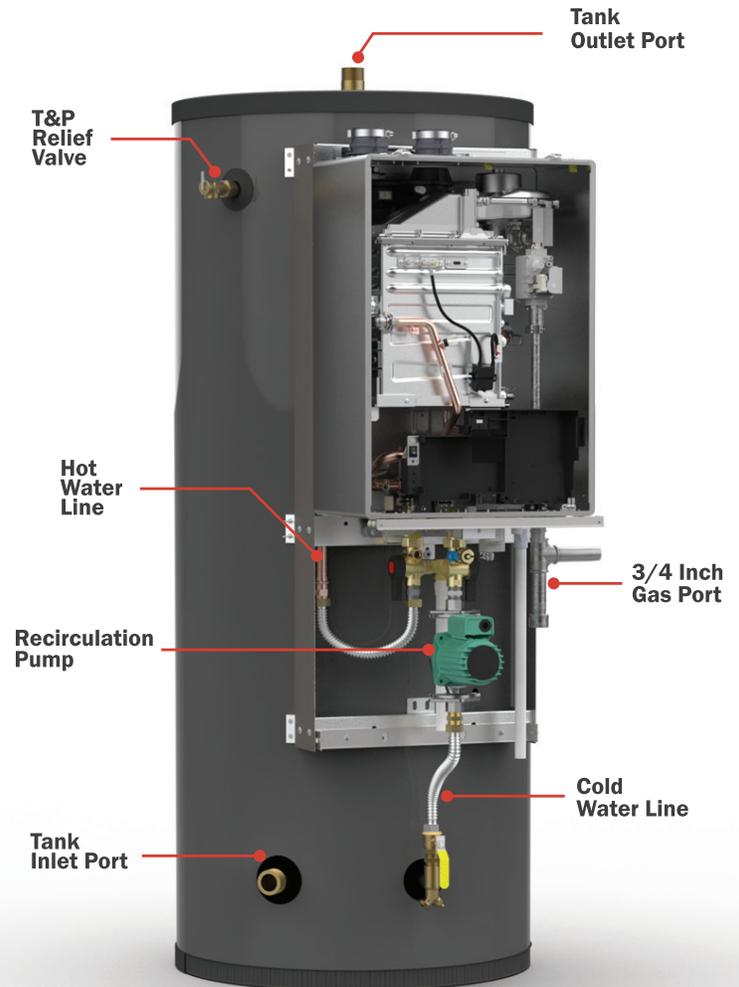

Recovery Capacity

Product Number	Approx. Tank Capacity	Max Input (Btu/hr)	GPH (LPH) vs Temperature Rise											
			30°F	40°F	50°F	60°F	70°F	80°F	90°F	100°F	110°F	120°F	130°F	140°F
NHH199100-1	119 Gal	199,900	780	585	468	390	334	292	260	234	213	195	180	167

TO LEARN MORE, VISIT US AT NORITZ.COM/HYBRIDHOT