

TTS SYNERGY S E R I E S

The TTS Synergy Series redefines commercial hot water delivery. Built for demanding environments, our tankless rack systems deliver industry-leading performance across a full range of configurations – including optional storage tank pairing for maximum flexibility. Commercial tankless engineering meets high performance with the TTS Synergy Series.

ONE POINT OF CONNECTION

All connections are shared with the TTS Synergy Series via our one point of connection feature, providing a more streamlined installation that saves time while cutting costs in labor and additional parts.

POWERED BY THE NCC199CDV PRO

Our TTS Synergy Series utilizes our latest NCC199CDV Pro, which features an upgraded control panel, 0.98 UEF, and an industry-leading 10 year warranty.

SMALLER FOOTPRINT

The TTS Synergy Series provides greater space savings by using a compact design - giving it the ability to combine multiple heaters into the smallest footprint possible.

STORAGE AND WALL HANGING OPTIONS AVAILABLE

In addition to our floor standing model, we also offer wall hanging configurations as well as storage and no storage tank options.

S SERIES



TTS-S5

Up to 999,500 BTU/hr

TTS-S2MINI

Up to 399,800 BTU/hr

S Series

Maximum BTU with a Smaller Footprint

The S Series utilizes a floor standing configuration and boasts all features found on our TTS Systems. Features a BTU range of 399,800 – 1,199,400 which is powerful enough for most commercial needs.

Available Models: TTS-S2MINI, TTS-S4MINI, TTS-S3, TTS-S5, TTS-S6

SCAN TO VIEW SPEC SHEETS AND MORE FOR S SERIES



Features

- One Point of Connection
- Aluminum Frame
- 2 to 6 – Noritz NCC199CDV Pro Tankless Water Heaters with System Controller
- 1 1/2" Water & Gas Manifolds
- 3/4" Condensate Drain Manifold
- Expansion Tank Included
- Breaker Box w/ Included Circuit Breakers
- Pump Controller with Timer
- Surge Protector
- Building Recirculation Pump
- Shutoff Valves
- Well Immersed Thermistors for Easy Monitoring of Building Hot Water Performance

TWST SERIES



TTS-TWST6

Up to 1,199,400 BTU/hr

TWST Series

Ideal for Jobs with High Periodic Demand

The TWST Series boasts all the features found on our TTS Systems while also utilizing a storage tank. This series can range from 399,800 to 1,199,400 BTU meaning it has enough power for most commercial scenarios requiring periodic high dump loads.

Available Models: TTS-TWST2, TTS-TWST3, TTS-TWST4, TTS-TWST5, TTS-TWST6

SCAN TO VIEW SPEC SHEETS AND MORE FOR TWST SERIES



Features

- One Point of Connection
- Aluminum Frame
- 2 to 6 – Noritz NCC199CDV Pro Tankless Water Heaters with System Controller
- 119 Gallon Storage Tank Included
- 1 1/2" Water & Gas Manifolds
- 3/4" Condensate Drain Manifold
- Expansion Tank Included
- Breaker Box w/ Included Circuit Breakers
- Pump Controller with Timer
- Surge Protector
- Building Recirculation Pump
- Storage Tank Recovery Circulator (System Pump)
- Isolation Valves
- Well Immersed Thermistors for Easy Monitoring of Building Hot Water Performance
- 2" Hot Water Supply to Storage Tank
- 2" Cold Make Up Water
- 2" Supply through Pump to Tankless
- 2" Pump Bypass
- Integrated 2" Check Valves



TTS-SWH2

Max BTU/hr:
399,800



TTS-SWH3

Max BTU/hr:
599,700



TTS-SWH4

Max BTU/hr:
799,600

TTS-SWH Series

Available Models: TTS-SWH2, TTS-SWH3, TTS-SWH4

The TTS-SWH Series provides businesses with an all-new way to meet their water heating needs. This wall hung configuration brings even more space savings without sacrificing hot water delivery & continues to provide the redundancy found in the TTS Family.



SCAN TO VIEW SPEC SHEETS AND MORE FOR TTS-SWH

Also Available

FIOP

FACTORY INSTALLED OPTIONS

Our FIOP is our custom offerings that are tailored to the needs and demands of a business. If a demand is greater than one of our standard offerings, this is the solution for you.



SCAN TO GET A FIOP QUOTE FOR YOUR BUSINESS


Features

- OPC (One Point Of Connection) For Water, Recirculation Return Line, Power, Gas, Venting & Condensation Drain
- Manifold Systems
 - Hot Water Outlet, Cold Water Inlet, Gas, & Condensate Drain
- Building Recirculation
- Reduction In Labor Hours
- Includes Wall Bracket
- Worry-Free Installation
- Designed To Fit Through 3'-0" X 7'-0" Door
- Pre-Engineered System
- Pre-Configured Control Wiring
- Pre-Installed System Controllers
- Warranty
 - 10 Years Heat Exchanger Per Tankless Unit
 - 5 Years Water Heater Parts & Components
 - 3 Year Circulation Pump
 - 1 Year Labor
- Additional Included Accessories:
 - Condensate Neutralizer (Qty 1)
 - Expansion Tank (Non-ASME)
 - 4.5 Gallon (TTS-S2/3/4MINI Models)



TTS-TWST6 vs COMPETITOR

FOOTPRINT COMPARISON

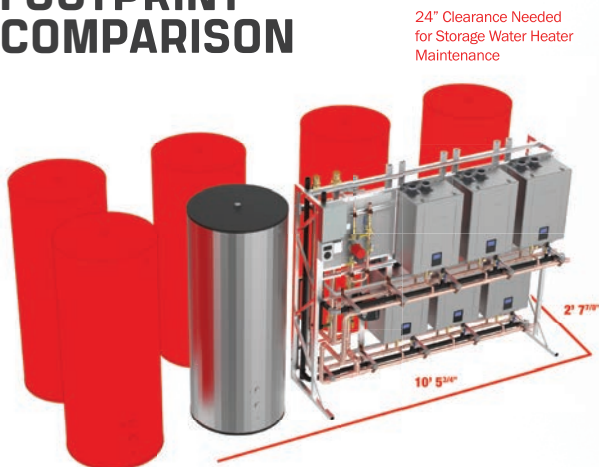

COMPETITOR


Condensing 100/199
- 1,602 GPH (At 100°F Rise)

TTS-TWST6

- 1,604 GPH (At 100°F Rise)

TOTAL TANKLESS SOLUTION

SYSTEM DIMENSIONS

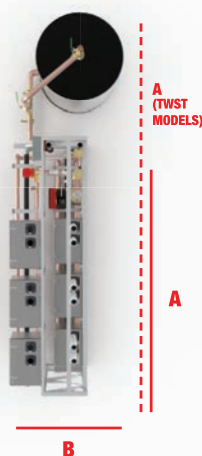

	(A) LENGTH	(B) WIDTH	HEIGHT
TTS-S2MINI	35"	31.5"	80"
TTS-S3	52.25"	31.5"	80"
TTS-S4MINI	56.75"	31.5"	80"
TTS-S5	74"	31.5"	80"
TTS-S6	95.75"	31.5"	80"
TTS-TWST2	80.25"	31.5"	80"
TTS-TWST3	102"	31.5"	80"
TTS-TWST4	102"	31.5"	80"
TTS-TWST5	123.75"	31.5"	80"
TTS-TWST6	123.75"	31.5"	80"

FOR A CONSULTATION, PLEASE CONTACT
COMMERCIAL@WEBFRG.COM



POWERED BY