


Termostaattinen patteriventtiili DN 10, DN 15, DN 20 Oras Stabila Pro

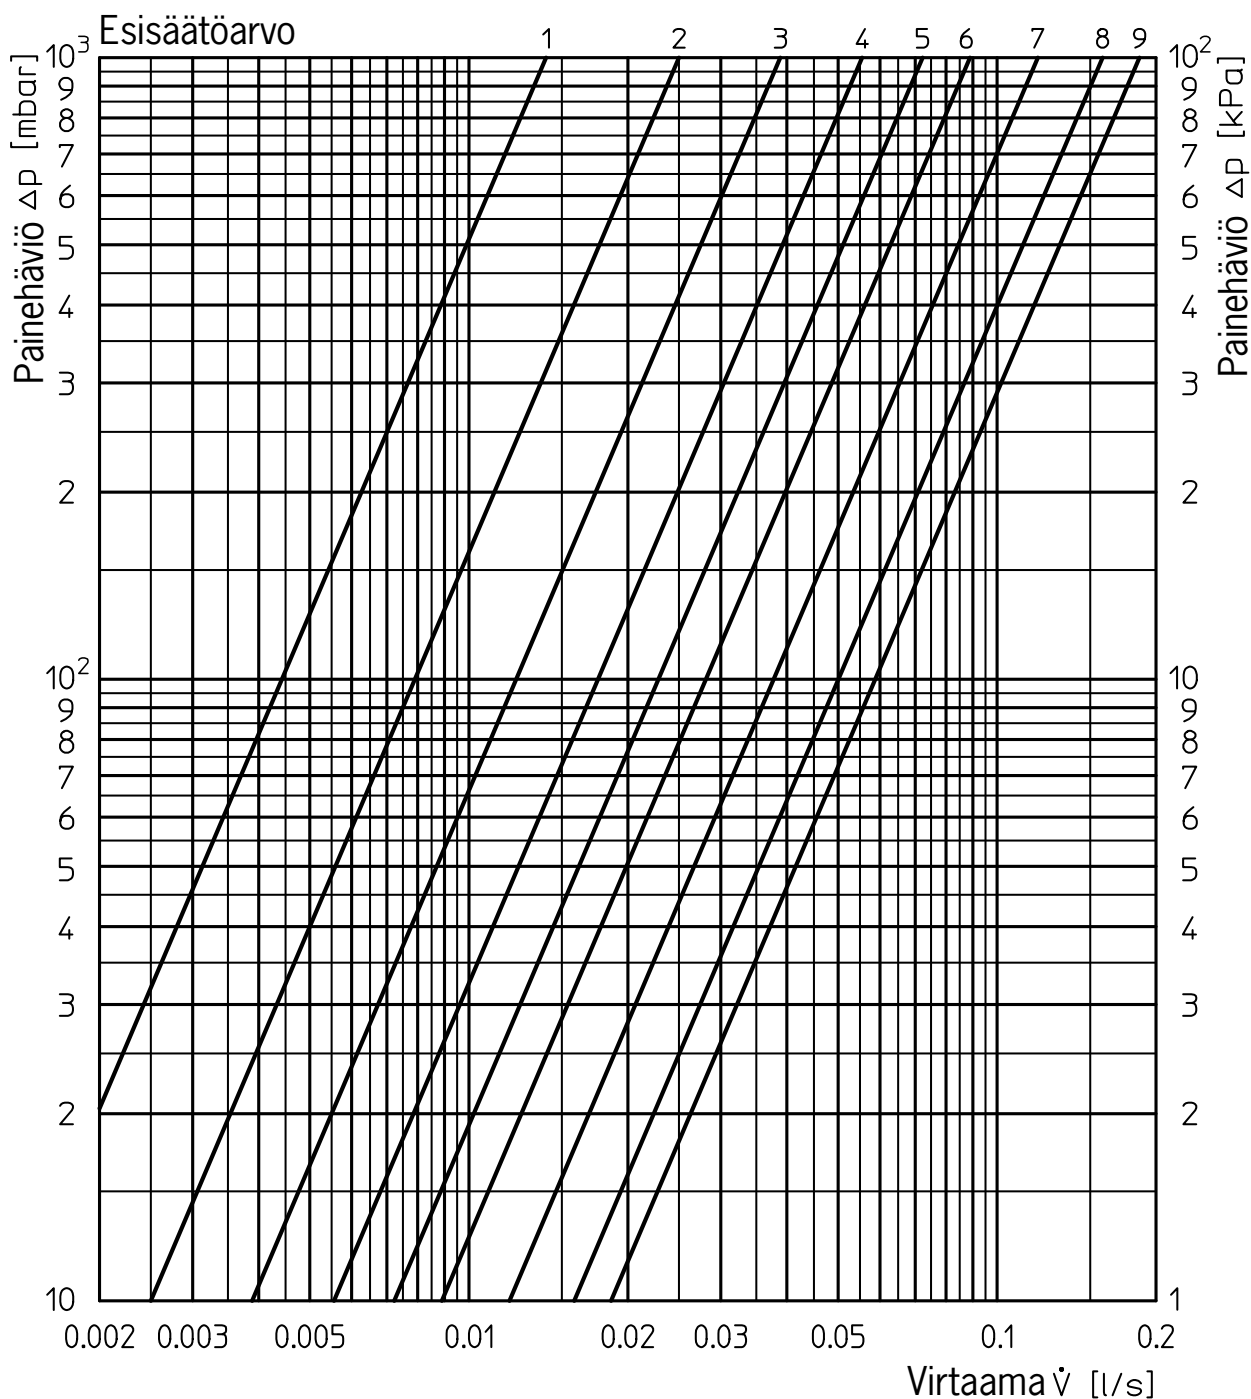

Esisäätöarvo	1	2	3	4	5	6	7	8	9
kv-arvo	0.05	0.09	0.14	0.2	0.26	0.32	0.43	0.57	0.67
kv-arvo 2 ° P-poikkeamalla									