



JBM CAMPLLONG, S.L.
PRODUCTES D'AUTOMOCIÓ

CERTIFICADO DE CONFORMIDAD CE

CONCEPTO: Conformidad CE para Equipamiento de Protección Individual
Acción: GUANTES PROTECTORES CONTRA RIESGOS MECÁNICOS
Artículo nombrado por el fabricante: 51633 / 51634 / 51632N / 51398N

Importado por: JBM CAMPLLONG, S.L.
Distribuido por: JBM CAMPLLONG, S.L.
Dirección: CIM La Selva – Crta. Aeropuerto Km 1.6 Nave 2.2, 17185 Vilobí d'Onyar
CIF: B17419292

Detalles del producto:
Referencia del distribuidor: 51633 / 51634 / 51632N / 51398N
Conformidad con la directiva 2016/425/EEC y el estándar EN 420:2003+A1:2009 / EN 388:2016



EU-TYPE EXAMINATION CERTIFICATE



The following model of Personal Protective Equipment has been subjected to an EU-type examination in accordance with the module B of the PPE regulation (2016/425) and has been shown to satisfy to essential health and safety requirements.

Certificate N° 0075/1988/162/12/18/3034

Issued by CTC, Notified Body N°0075, to the following model of personal protective equipment :

Manufacturer : JBM CAMPLLONG, S.L.
C/Rejas, 2-P5, Oficina 17 28821 Coslada (Madrid), SPAIN

Description

PPE Type : *protective glove against mechanical risks*


Product reference : 51633, 51634, 51632N, 51398N

Article code : -

Glove description : 13 gauge seamless knit glove coated with smooth nitrile from palm to finger

Available sizes : 6 7 8 9

Pictures :

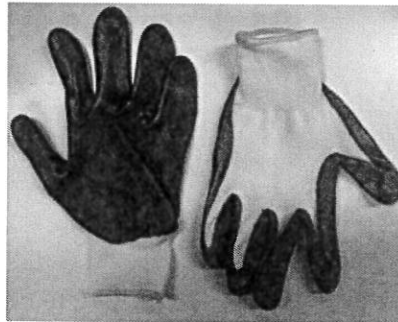

EN388:2016



3 1 2 1 X

REF: 51633 51634

51632N 51398N

SIZE: 9

Lot: 10/18

C/Rejas, 2-P5, Oficina 17 28821 Coslada (Madrid) SPAIN

Reference standard :

Levels of performance / class of protection

EN 420:2003+A1:2009

-

EN 388:2016

3 1 2 1 X

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

At the date of certificate the product is in compliance with Annex XVII of REACH regulation (n° 1907/2006 and revisions)

Full description of the PPE, reference rules verified in the context of the EU-type examination and information given on the product are detailed in the manufacturer's technical file and the instruction for use index 01 dated from DECEMBER 2018

NOTA : Any modification to new items of the personal protective equipment object of this EU type approval certificate or any modification of the information contained in the manufacturer technical file which served for the deliverance of the EU type approval certificate (change of address, change of company status) should be brought to the attention of the notified body in accordance with Annex V §7.2 of Regulation 2016/425.

Issued in Lyon by
Lionel Gaudillere
PPE Certification Manager

Date of first issue : 20 December 2018
End of validity date : 30 August 2023

www.ctcgroupe.com

cemarking@ctcgroupe.com

In application of the Regulation 2016/425 of the European parliament and the Council of 9th March 2016 related to Personal Protective Equipment and repealing the Directive 89/686/EEC.

CTC - 4, rue Hermann Frenkel - 69367 Lyon cedex 07 - France
Tél. : +33 (0)4 72 76 10 10 - Fax : +33 (0)4 72 76 10 00 - ctclyon@ctcgroupe.com
Comité Professionnel de Développement Économique (CPDE) Cuir Chaussure Maroquinerie Ganterie
Loi 78-654 du 22.06.1978 - Siret 77564972600160 - Code NAF 9412Z - TVA FR 88775649726

Original CTC



JBM CAMPLLONG, S.L.

MANUFACTURER'S TECHNICAL FILE TO THE PPE REGULATION 2016/425

Reference of the product	:	51633, 51634, 51632N, 51398N
Article code	:	-
Technical file index	:	01
Last update	:	DECEMBER 2018

IDENTIFICATION

Reference of the product :	:	51633, 51634, 51632N, 51398N
Article code :	:	-
Basic Model		
Technical file index :	:	01
Last update :	:	DECEMBER 2018

Manufacturer :

JBM CAMPLLONG, S.L.

C/Rejas, 2-P5, Oficina 17 28821 Coslada (Madrid),

SPAIN

tel : 34 972 24 55 33

fax : 34 972 24 55 33

GLOVE DESCRIPTION

General glove description :

13 gauge seamless knit glove coated with smooth nitrile from palm to finger
type of coating finish : smooth

Visual description (picture back and palm sides) :



Field of use

garden work, construction site

Risk assessment (Essential Health and Safety Requirement. Annex II - PPE Regulation)			
		Applicable	Covered by
§1	Requirements defined in the Annex II §1 are applicable to all PPE	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking
§1.4	Manufacturer's instructions and information is available	<input checked="" type="checkbox"/>	<input type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input type="checkbox"/> Marking
§2.4	If it is known that the design performance of new PPE may be significantly affected by ageing, the month and year of manufacture and/or, if possible, the month and year of obsolescence must be indelibly and unambiguously marked on each item of PPE placed on the market and on its packaging.	<input checked="" type="checkbox"/>	<input type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking
§2.5	PPE which may be caught up during use	<input checked="" type="checkbox"/>	<input type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input type="checkbox"/> Marking
§2.12	PPE bearing one or more identification markings or indicators directly or indirectly relating to health and safety	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking
§3.3	The PPE is intended to protect against mechanical injuries	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking

Available sizes :

Minimum length of glove (mm)	Sizes
220	6
230	7
240	8
250	9

Glove constitution :

	Reference	Color	Material	Surfacic mass	Gauges	Thickness
Palm		WHITE	KNITTED FABRIC(50% NYLON/50%POLYESTER)	330g/m ²	13	
		GREY	NITRILE			1.15mm
Back		WHITE	KNITTED FABRIC(50% NYLON/50%POLYESTER)	330g/m ²	13	
Cuff		WHITE	ELASTIC			
		YELLOW/GREY/GREEN/WHITE	KNITTED FABRIC(50% NYLON/50%POLYESTER)	330g/m ²	13	
Binding		Black,yellow	THREAD-POLYESTER			

PROTECTION SCOPE

This glove meets the essential requirements of the Personal Protective Equipment Regulation 2016/425.
This glove is designed for mechanical risks.
It is a category II product.

GENERAL REQUIREMENTS

Standard EN 420 : 2003 + A1 : 2009

Dexterity : 5

Size : conform

At the date of certificate the product is in compliance with Annex XVII of REACH regulation (n° 1907/2006 and revisions)

SPECIFIC REQUIREMENTS AND PERFORMANCE LEVELS

Mechanical hazard EN 388 : 2016

Protection offered	Performance levels
Abrasion resistance	3
Blade cut resistance	1
Tear strength resistance	2
Puncture resistance	1
Cut Resistance method (EN ISO 13997)	X
Impact Protection	-

The levels of performance have been measured on the palm

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.


TEST REPORTS

Laboratory	CTC	Other
EN 420 + innocuousness	D180405810_1, D160608661_2 D180101101_1, D130809122_1	
EN 388	D180405810_1, D180508830_1	

MARKING - PACKAGING

Information printed on the glove :

Logo of Manufacturer :

Logo 

Glove's reference : 51633, 51634, 51632N, 51398N

Article Code : -

Size indicator


Pictograms related to risks against which protection is offered with performance levels

Information pictogram

Address of Manufacturer :

Date of Manufacture (month/year) and/or Serial number :

Marking example :

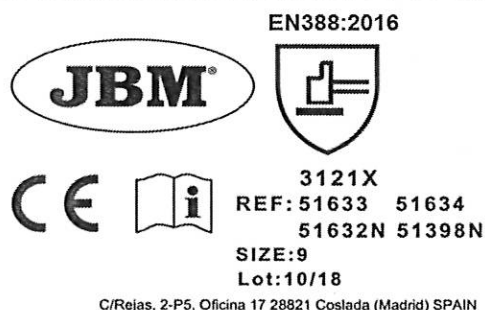

Method of marking on the glove :

Printed on the back of each glove

Packaging :

12pairs/clear polybag, 144pairs/carton

PPE subject to ageing :

Peremption period : 3 years when stored in appropriate conditions (humidity, temperature, clean , ventilated, light). Before use, the glove shall be visually controlled, in case of deterioration the gloves must be scrapped (abrasion, cut, tear, ...).

Declaration of conformity :

Available with product.

MEANS OF CONTROL

1. We choose the good suppliers to provide us material with good quality. At the same time, when we received the raw materials we should test some items according to relevant standard, such as EN 420 and relevant EU directive; the bad material cannot meet requirement will be rejected.
2. when we received the raw materials for mass production, the material QC will check them serious in order that no any problem at the beginning;
3. Make samples before production, make sure samples meet the requirement of client and we test the glove as the requirement EN388 mechanical risk ,EN420,and other chemical items,then start to produce; it's very important for us;
4. Regularly check the quality of products in the whole process; any unacceptable defects are found, the gloves will be discarded; QC for each step will perform inspection in accordance with our requirement strictly;
5. Confirm packing specification before packing and regularly check and keep records;
6. According to QA inspection procedures, QA will perform final inspection on some cartons of glove randomly. Then the goods can be shipped in case no any problems.
7. When do bulk the production each batch, we shall pick up some gloves from producing site randomly to test abrasion resistance, blade cut resistance, tear resistance or puncture resistance, Ph value or AZO DYE.... to control the quality to match the requirement of standard EN388, EN420.

INSTRUCTION FOR USE

JBM CAMPLLONG, S.L.

C/Rejas, 2-P5, Oficina 17 28821 Coslada (Madrid),

SPAIN

Glove reference : 51633, 51634, 51632N, 51398N

Article code: -

User notice index : 01

Last Update : DECEMBER 2018

Available sizes : 6 7 8 9

Glove description :

13 gauge seamless knit glove coated with smooth nitrile from palm to finger

THIS GLOVE IS A PERSONAL PROTECTIVE EQUIPMENT BELONGING TO THE CATEGORY II.

It meets the requirements of the PPE Regulation 2016/425 applicable from April 21th, 2018 : innocuousness, comfort, solidity.

It has been subject to a UE-type Examination performed by :

C.T.C. (0075)

4, rue Hermann Frenkel

69367 LYON Cedex 07

FRANCE

Applicable standards :

The glove meets the requirements of the standard EN 420 : 2003 + A1 : 2009 « General requirements for work glove ». Dexterity : 5

Moreover, this glove has been designed for the following applications :

Application :

Mechanical hazard - EN 388 : 2016



3 1 2 1 X

Levels of performance

Abrasion resistance	3	(on 4 maxi)
Blade cut resistance	1	(on 5 maxi)
Tear resistance	2	(on 4 maxi)
Puncture resistance	1	(on 4 maxi)
Cut Resistance method (EN ISO 13997)	X	(A to F)
Impact Protection		

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

Protection limit :

Users should be warned that gloves should not be worn when there is a risk of entanglement by moving parts of machines.

This model does not contain any substances at levels that are known to, or suspected to, adversely affect user hygiene or health.

The protection against risks or hazards which are not mentioned in this document is not warranted.

The levels of performance mentioned are only valid for the palm of the glove.

The levels of performance mentioned are only valid for new gloves, not washed, nor regenerated.

These levels of performance are obtained from the tests done according to conditions defined by the applicable standards.

This glove shall not be in contact with fire

Before use, the glove shall be visually controlled, in case of deterioration the gloves must be scrapped (abrasion, cut, tear, ...).

For gloves with different layers of material, the performance levels are warranted only for the whole glove.

For gloves with two or more layers the overall classification does not necessarily reflect the performance of the outermost layer.

Storage and cleaning notice

Keep in its original packaging, under ordinary temperature and humidity conditions and in clean, covered and ventilated premises.

PPE subject to ageing :

Peremption period : 3 years when stored in appropriate conditions (humidity, temperature, clean, ventilated, light). Before use, the glove shall be visually controlled, in case of deterioration the gloves must be scrapped (abrasion, cut, tear, ...).

Declaration of conformity :

Available with product.