


This drawing is copyright. No part of this work may be copied, reproduced, altered or amended, stored in a retrieval system, or transmitted in any form or by any means without the prior permission in writing of the copyright owner.

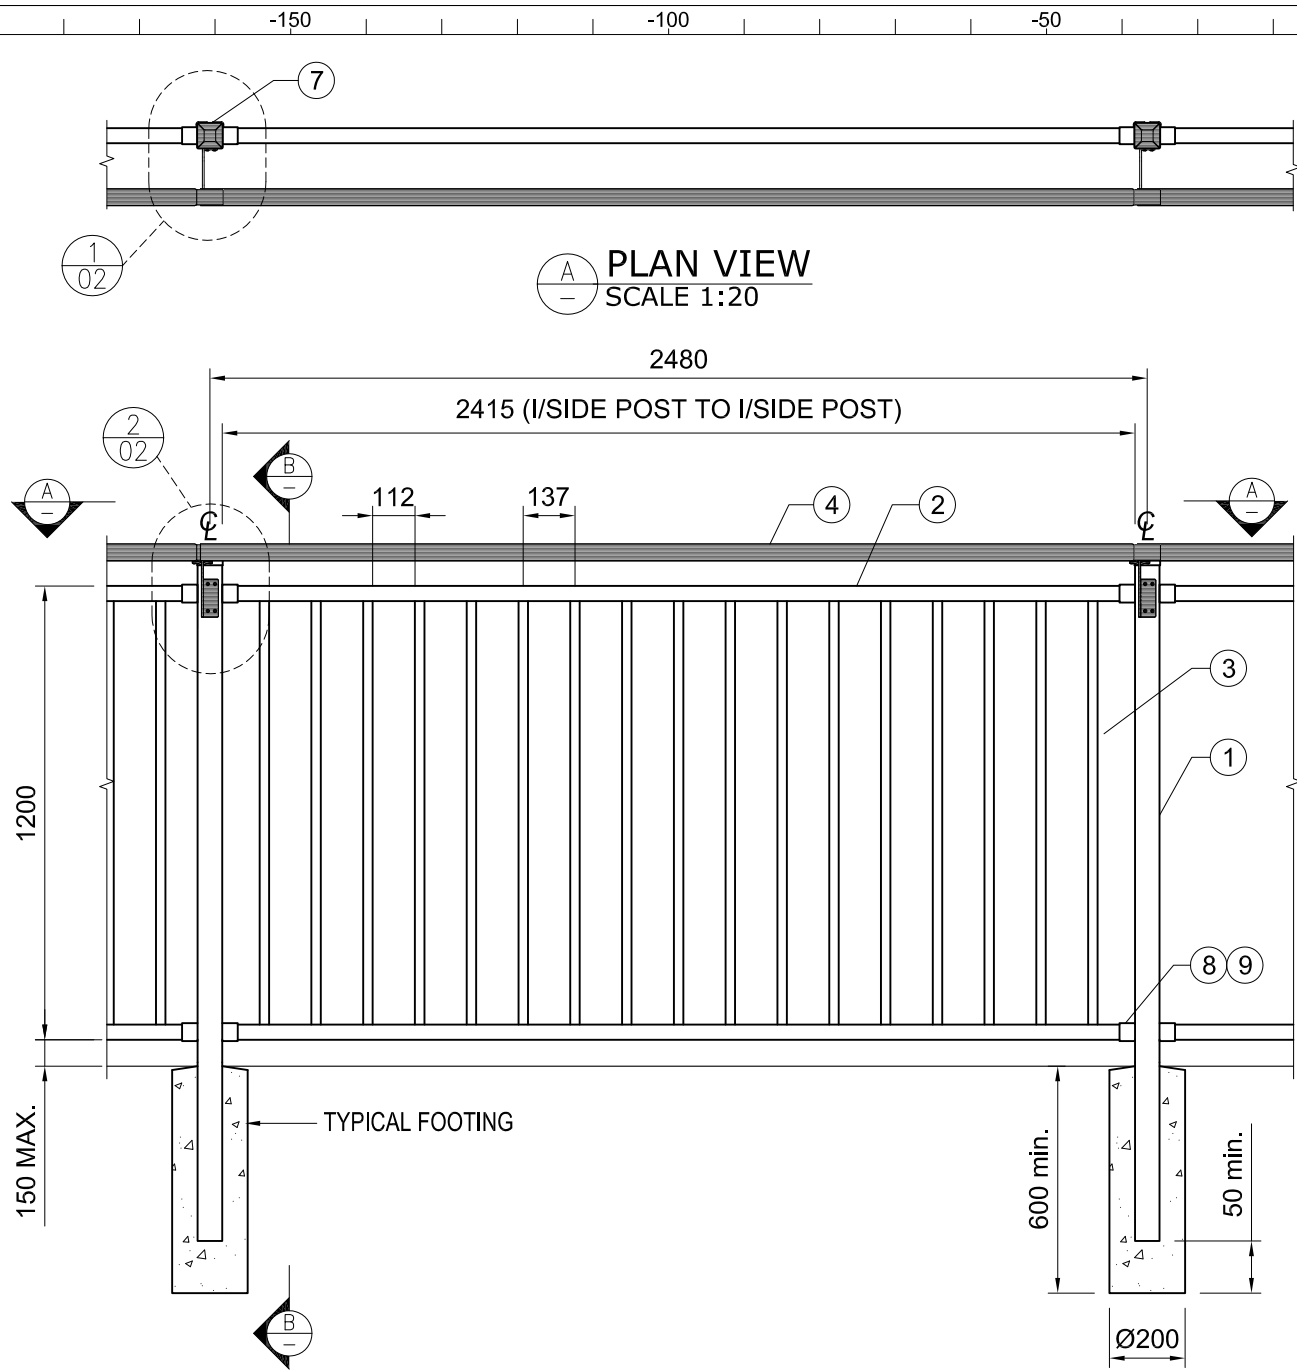

TYPICAL VIEW - LOOKING FROM CYCLEWAY  
SCALE 1:20

### GENERAL NOTES

1. STEEL TUBE TO COMPLY WITH AS1450 DESIGNATION C250 MINIMUM.
2. STEEL TUBE TO HAVE A ZINC COATING MASS OF 137 G/M<sup>2</sup> INSIDE AND OUTSIDE OF TUBE.
3. POWDER COATING\* TO COMPLY WITH AS4506 CLASSIFICATION 2 (SUBJECT TO SITE CONDITIONS).
4. SCREWS TO NON-PATH SIDE OF FENCE UNLESS BRACKET RESTRICTED.
5. CONCRETE FOOTINGS 20MPA MINIMUM.
6. FOOTING SIZE RECOMMENDED (SUBJECT TO SITE SOIL CONDITIONS).
7. REFER TO FULL SET OF DRAWINGS AND INSTALL GUIDE FOR CHANGES OF DIRECTION AND TERMINATION LAYOUT.

\*IF APPLICABLE


## STRAIGHT LEVEL RUN

**BLUEDOG  
FENCES**  
AUSTRALIA  
ph. (02) 6755 6444  
f. (02) 6762 2311  
bluedogfences.com.au

DRAWN	J.H	17-09-16	JOB NO. 1198	© Bluedog Fences Australia Pty Ltd.		
REVIEWED	S.B	17-09-16	APPROVAL STATUS	CYCSAFE® SAFETY FENCING "FULL BARRIER" STANDARD ASSEMBLY STRAIGHT LEVEL RUN		
APPROVED	S.B	17-09-16		A3 CSF -01 A		
SCALE: 1:20		@ A3	DO NOT AMEND MANUALLY	CODE	SHEET	AMDT

### NOTE:-

1. REFER AUSTRROADS "AP-11.14 99 GUIDE TO TRAFFIC ENGINEERING PRACTICE BICYCLES PART 14 BICYCLES (1999)" SUPERCEDED BY "AGRD06 A 09 GUIDE TO ROAD DESIGN PART 6A - PEDESTRIAN AND CYCLIST PATHS (2009)." ALSO REFER TO "PART 6 B-ROADSIDE ENVIRONMENT (2010)"

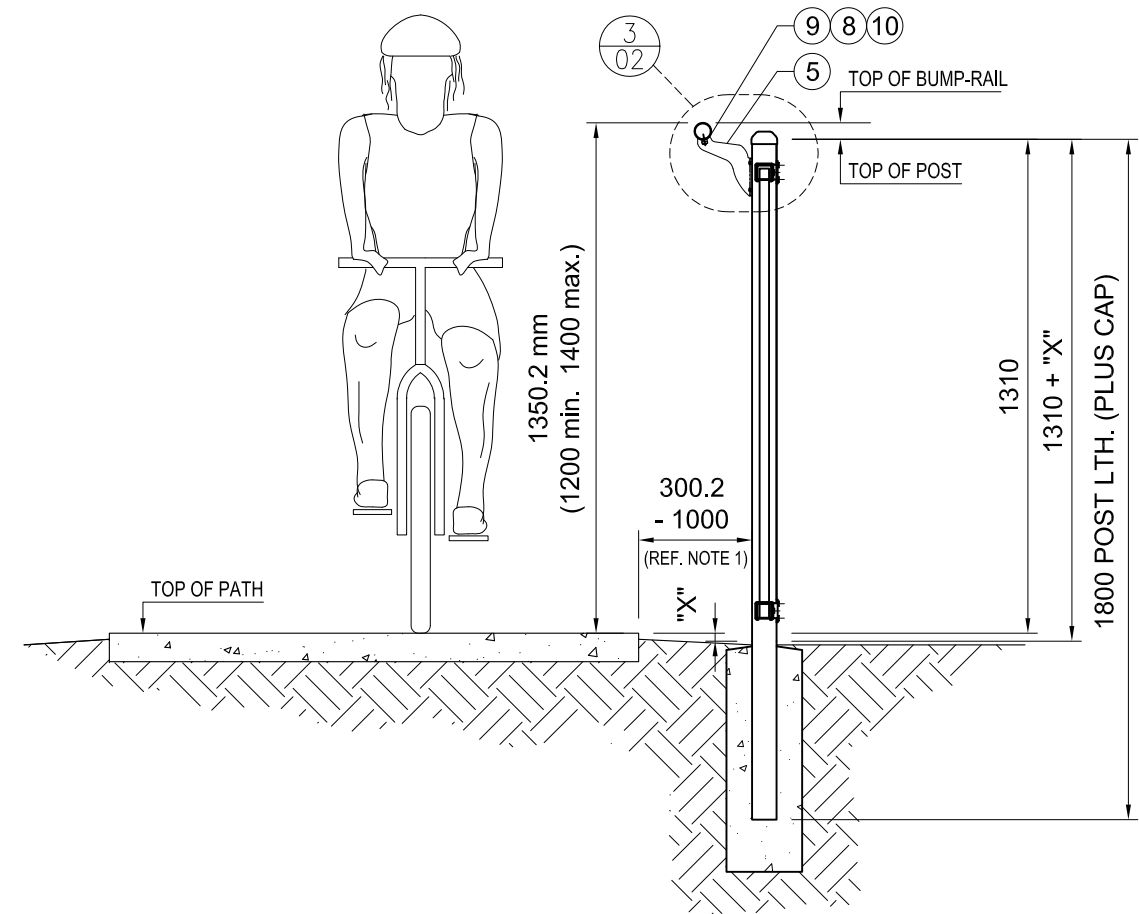



SECTION VIEW  
SCALE 1:20

### BILL OF MATERIALS

ITEM	DESCR.	QTY.	SPEC.
1	POST	2	65 x 65 x 1.6mm SHS x 1800mm LG
2	RAIL	2	40 x 40 x 1.6mm SHS x 2400mm LG
3	PICKET	22	25 x 25 x 1.2mm x 1190mm LG @ 137mm Cts
4	BUMP RAIL	1	Ø48.3mm x 1.6mm x 2540mm LG
5	BRACKET	1	BUMP RAIL BRACKET
6	U-CLIP	1	U-CLIP
7	POST CAP	2	65 x 65 STEEL CAP
8	RAIL BRACKET	4	ONE PIECE SECURITY BRACKET
9	SCREW	16	ANTI-TAMPER SELF DRILLING TEK SCREW 12gx25mm LG
10	RIVET	2	Ø4.8mm STAINLESS STEEL RIVET

B	GENERAL REVISED	JH	17.09.16
A	GENERAL REVISED	JH	18.05.16
AMDT	DESCRIPTION	BY	DATE
	279x385		

This drawing is copyright. No part of this work may be copied, reproduced, altered or amended, stored in a retrieval system, or transmitted in any form or by any means without the prior permission in writing of the copyright owner.

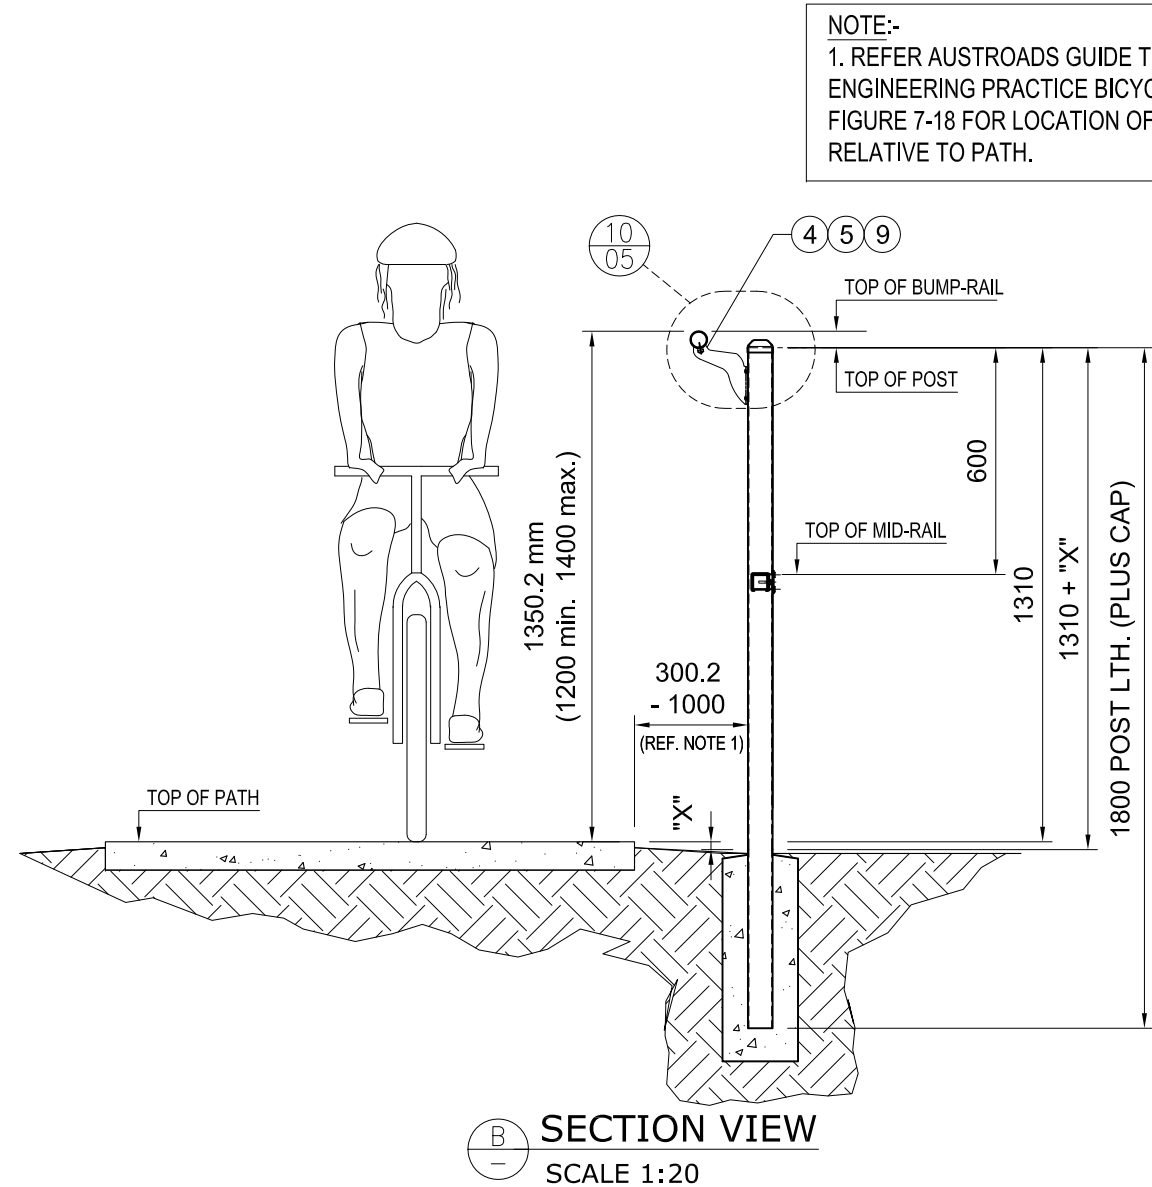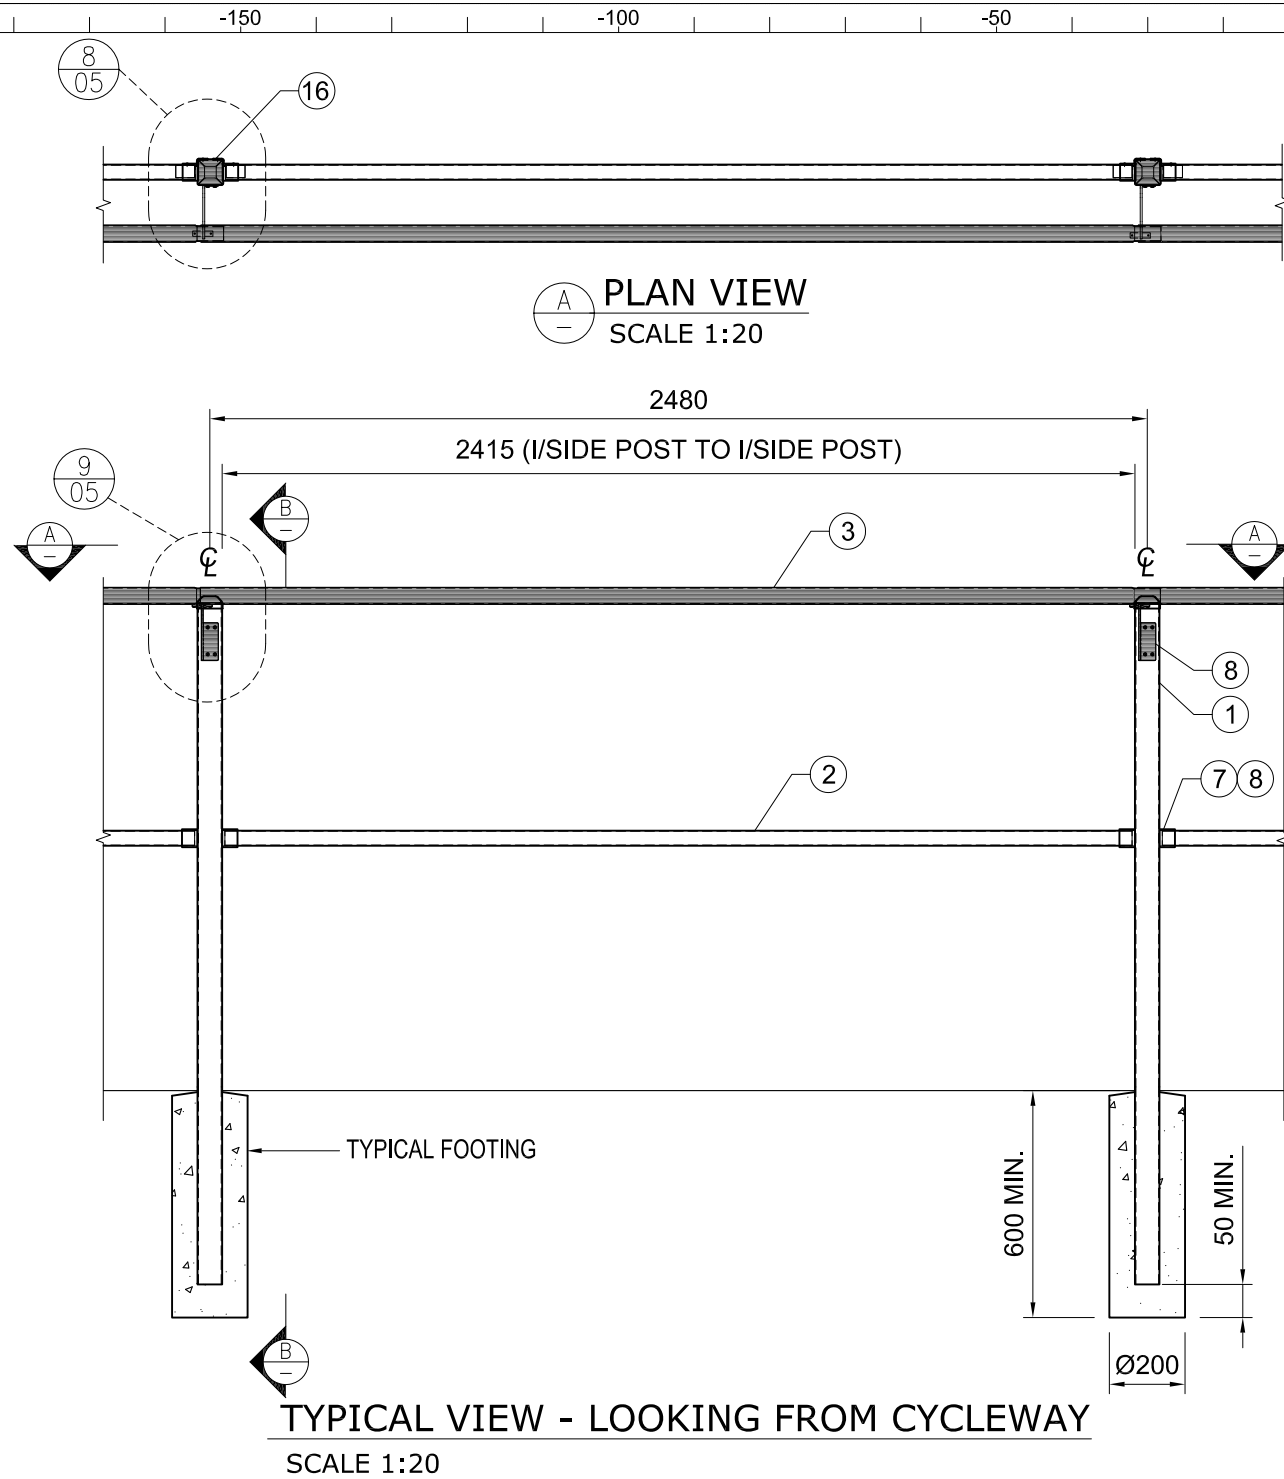

NOTE:-  
1. REFER AUSTRROADS GUIDE TO TRAFFIC ENGINEERING PRACTICE BICYCLES PART 14 FIGURE 7-18 FOR LOCATION OF BARRIER RELATIVE TO PATH.

### GENERAL NOTES

- STEEL TUBE TO COMPLY WITH AS1450 DESIGNATION C250 MINIMUM.
  - STEEL TUBE TO HAVE A ZINC COATING MASS OF 137 G/M<sup>2</sup> INSIDE AND OUTSIDE OF TUBE.
  - POWDER COATING\* TO COMPLY WITH AS4506 CLASSIFICATION 2 (SUBJECT TO SITE CONDITIONS).
  - SCREWS TO NON-PATH SIDE OF FENCE UNLESS BRACKET RESTRICTED.
  - CONCRETE FOOTINGS 20MPA MINIMUM.
  - FOOTING SIZE RECOMMENDED (SUBJECT TO SITE SOIL CONDITIONS).
  - REFER TO FULL SET OF DRAWINGS AND INSTALL GUIDE FOR CHANGES OF DIRECTION AND TERMINATION LAYOUT.
- \*IF APPLICABLE.

## STRAIGHT LEVEL RUN

BILL OF MATERIALS			
ITEM	DESCR.	QTY.	SPEC.
1	POST	2	65 x 65 x 1.6mm SHS x 1800mm LG
2	RAIL	2	40 x 40 x 1.6mm SHS x 2400mm LG
3	BUMP RAIL	1	Ø48.3mm x 1.6mm x 2540mm LG
4	BRACKET	1	BUMP RAIL BRACKET
5	U-CLIP	1	U-CLIP
6	POST CAP	2	65 x 65 STEEL CAP
7	RAIL BRACKET	4	ONE PIECE SECURITY BRACKET
8	SCREW	16	ANTI-TAMPER SELF DRILLING TEK SCREW 12gx25mm LG
9	RIVET	2	Ø4.8mm STAINLESS STEEL RIVET