


SKID STEER LOADER ATTACHMENTS



DIGGA

QUALITY AUSTRALIAN MADE SINCE 1981

DIGGA IS AN AUSTRALIAN OWNED COMPANY AND PROUD TO BE MANUFACTURING RIGHT HERE IN AUSTRALIA. NOT ONLY ARE YOU BUYING A QUALITY PRODUCT WHICH WILL STAND THE TEST OF TIME, BUT YOU'RE ALSO SUPPORTING OVER 200 AUSTRALIAN FAMILIES.



Formed in 1981 in Brisbane, Digga specialise in the design and manufacture of planetary gearboxes and machinery attachments for the earthmoving and construction industry. Digga have five company owned facilities around the world to ensure a prompt and efficient service through our extensive, professional global dealer network.

CONTENTS

ABOUT DIGGA.....	5.
AUGER DRIVES - SINGLE SPEED.....	6.
HALO.....	8.
AUGER DRIVES - 2 SPEED.....	10.
AUGERS.....	11.
HORIZONTAL DRILLING.....	12.
CEMENT MIXER.....	12.
SWING CONTROL.....	13.
ENERGY CONTROL VALVE (ECV).....	14.
TELESCOPIC PILING & DRILLING EXTENSION.....	14.
TORQUE MEASURING.....	15.
PRESSURE DIFFERENTIAL GAUGE.....	15.
DIGGALIGN.....	15.
TRENCHERS - BIGFOOT.....	16.
TRENCHERS - HYDRIVE.....	17.
TRENCHER CHAINS.....	17.
BUCKETS - 4 IN 1 & 6 IN 1.....	18.
BUCKET ACCESSORIES.....	19.
BUCKET GENERAL PURPOSE.....	19.
BUCKET ROCK.....	20.
DOZER BLADE.....	21.
BROOMS BUCKET.....	22.
BROOMS ANGLE.....	23.
PALLET FORKS.....	24.
RAMPS.....	25.
ROAD PROFILER.....	26.
VIBRATORY ROLLER.....	27.
STICK RAKE.....	28.
SLASHERS.....	29.
ROTARY AXE.....	30.
MULCHER.....	31.
LANDSCAPING RAKE.....	32.
ROTARY TILLER.....	33.
STUMPGRINDER.....	34.
SKID HOE.....	35.
DEBRIS CLEANER.....	35.
TILT ATTACH.....	35.

DIGGA

ABOUT US

5

- Digga was established in 1981 in Queensland, Australia.
- The company is 100% Australian owned and employs over 260 people.
- Digga is the pioneer of pendulum drilling in Australia.
- Designs & manufactures over 70 different attachments, extensive wearparts and spare parts.
- Over 39 years manufacturing and distribution experience providing quality, versatility, competitive pricing backed with a factory warranty.
- Digga currently export to over 50 countries around the world and support a network of 450 dealers.
- Digga gearboxes and attachments are manufactured in Digga's state of the art 12,500sqm (135,000 sq ft) facility in Brisbane Australia.
- We use only the highest grade materials coupled with the strictest quality control methods. Digga gears, components and range of attachments are produced to world leading standards.
- Committed to research & development Digga's R&D division uses cutting edge 3D software, finite analysis and 3D modelling to design new products and optimise attachment performance to insure your product performs to its full potential.



**AUSTRALIA'S LEADING MANUFACTURER
& DISTRIBUTOR OF EARTHMOVING
MACHINERY ATTACHMENTS**

AUGER DRIVE SINGLE SPEED

DIGGA PREMIUM AUGER DRIVES FOR SKID STEERS

FEATURES

- Compact high torque Digga manufactured gearbox.
- Highly efficient design with less moving parts.
- Fitted with Eaton/Digga geroler hydraulic motor.
- No case drain required.
- Full range of shafts available upon request.
- Extreme duty shaft locking system.
- Drive fits down the hole for greater digging depth.
- Low maintenance with 5 year gear box and 3 year motor warranty.

SMALL SKID STEERS (UP TO 1700KG)

	PDD	PDX	PDX2
Rec Flow Range	15-45 lpm	20-50 lpm	30-50 lpm
Max Torque	1,166 Nm	1,743 Nm	2,307 Nm
Pressure Valve Fitted	N / A	N / A	N / A
Max Pressure	Do not exceed 240 bar @ 60 lpm		
Max Flow	Do not exceed 115 lpm @ 130 bar		
Max Power	Do not exceed 25 Kw (34 hp)		
Overall Length	500 mm	557 mm	557 mm
Diameter	187 mm	187 mm	187 mm
Weight (no frame)	41 Kg	45 Kg	45 Kg
Std Output Shaft	65mm RND	65mm RND	65mm RND



NOT JUST AN ASSEMBLER, DIGGA ARE THE ORIGINAL DESIGNERS AND MANUFACTURERS

OUR CORE EXPERTISE 2,900Nm – 500,000Nm AND EVERYTHING IN BETWEEN

STANDARD SKID STEERS (1.7T - 3.5T)

	PD3	PD4	PD5	PD6
Rec Flow Range	45-75 lpm	55-85 lpm	60-95 lpm	70-115 lpm
Nominal Torque	3,544 Nm	4,448 Nm	5,151 Nm	5,596 Nm
Pressure Valve Fitted	Optional	Optional	Optional	Optional
Max Pressure	Do not exceed 240 bar @ 60 lpm			
Max Flow	Do not exceed 115 lpm @ 130 bar			
Max Power	Do not exceed 25 Kw (34 hp)			
Overall Length	579 mm	579 mm	579 mm	730 mm
Diameter	240 mm	240 mm	240 mm	240 mm
Weight (no frame)	57 Kg	58 Kg	67 Kg	89 Kg
Std Output Shaft	65mm RND	75mm SQ	75mm SQ	75mm SQ
Halo Available	Yes	Yes	Yes	Yes



HIGH FLOW SKID STEER (3.5T-4.5T)

	PD4HF	PD6HF
Rec Flow Range	70-150 lpm	70-150 lpm
Max Torque	4,473 Nm	5,634 Nm
Pressure Valve Fitted	Included	Included
Max Pressure	Do not exceed 240 bar @ 130 lpm	
Max Flow (Do not exceed)	170 lpm @ 180 bar	210 lpm @ 145 bar
Max Power	Do not exceed 50 Kw (67 hp)	
Overall Length	950mm	950mm
Diameter	290mm	290mm
Weight (no hitch)	125 Kg	149 Kg
Std Output Shaft	75mm SQ	75mm SQ



THE FUTURE OF DRILLING



WHAT IS HALO?

HALO is an alignment system built into the hood of the drive unit. A band of green LED lights indicate when the unit is in a plumb position, while a sequence of red and green lights guides the operator back to plumb, when the unit goes out of alignment.

AVAILABLE RANGE

PD3 - PD7. Complete PD range to be introduced late 2020/2021.



SOLID GREEN
DRIVE IS PLUMB



RED
INDICATES OFF PLUMB &
ADJUSTMENT DIRECTION

WHY YOU NEED HALO?

- ✓ DRILL STRAIGHT / AVOID SIDE LOAD
- ✓ NEVER TAKE YOUR EYES OFF THE JOB
- ✓ NO SETUP WITH BATTERY OPTION
- ✓ REDUCE IN-HOLE ANGLE CORRECTIONS - USE LESS CONCRETE
- ✓ REDUCE COSTS & INCREASE EFFICIENCY - NO NEED FOR A SPOTTER

**SEE IT
IN ACTION**



AUGER DRIVE 2-SPEED

- ✓ SPEED WHEN YOU NEED IT
- ✓ TORQUE WHEN YOU NEED IT

IT'S LIKE HAVING 2 DRIVES IN 1

- LOW SPEED - HIGH TORQUE: Suitable for large holes / rocky or heavy duty drilling.
- HIGH SPEED - LOW TORQUE: Suitable for smaller holes / soft earth.

STANDARD FLOW 2 SPEED DRIVES

	PDT3	PDT6	PDT8
Recommended Flow	20-75 lpm	20-75 lpm	20-75 lpm
Max Torque (Nm) @ 240 bar	2,954	4,664	5,600
Motor	2K Bell EATON	2K Bell EATON	2K Bell EATON
Pressure Valve Fitted	Included	Included	Included
Energy Control Valve	N/A	N/A	N/A
Case Drain Required	Optional	Optional	Optional
Max Pressure (Do not exceed)	200 Bar @ 76 lpm		
Max Flow (Do not exceed)	76 lpm @ 200 Bar		
Max Continuous Power (Do not exceed)	25 Kw		
Overall Length (mm)	766	820	917
Diameter (mm)	240	240	240
Overall Width (mm)	310	392	392
Weight (Kg)	75	104	119
STD Output Shaft	65mm RND	75mm SQ	75mm SQ

HIGH FLOW 2 SPEED DRIVE

	PDT4HF	PDT6HF	PDT8HF
Recommended Flow	40-120 lpm	40-150 lpm	40-150 lpm
Max Torque (Nm) @ 240 bar	4,673	5,758	7,881
Motor	Vis EATON	Vis EATON	Vis EATON
Pressure Valve Fitted	Included	Included	Included
Energy Control Valve	Optional	Optional	Optional
Case Drain Required	Included	Included	Included
Max Pressure (Do not exceed)	Do not exceed 240 Bar @ 150 lpm		
Max Flow (Do not exceed)	Do not exceed 180 lpm @ 200 Bar		
Max Continuous Power (Do not exceed)	Do not exceed 60 Kw (80HP)		
Overall Length (mm)	820	820	952
Diameter (mm)	340	340	340
Overall Width (mm)	392	392	392
Weight (Kg)	134	134	158
STD Output Shaft	75mm SQ	75mm SQ	75mm SQ



DRILLING AUGERS

Digga's True Cut augers boast a heavy duty design with high efficiency cutting heads to maximise your drilling performance.

Digga have 3 ranges available including earth augers (A Series), combo augers (RC Series) and dedicated rock augers (DR Series).



EARTH AUGERS (A) BLADED TEETH EARTH/CLAY/SHALES

ALL PURPOSE EARTH AUGER FOR
GENERAL DRILLING

EARTH / ROCK COMBO AUGER (RC) TAPER TEETH (ALL GROUND CONDITIONS)

TAPER TOOTH DESIGN FOR THE
ULTIMATE ALL PERFORMANCE AUGER

ROCK AUGER (DR) ROTATING ROCK PICK TEETH (SHALE/ FRACTURABLE ROCK)

HEAVY DUTY DESIGN AND EFFICIENT
CUTTING HEAD MAKE THE ULTIMATE
ROCK DRILLING AUGER


EXTENSIONS

- Large range of extensions up to 4000mm in length.
- High quality steel.
- Telescopic design for easier operation and storage.
- Easy fit design.



HOLE CLEANERS

- Remove spoil from holes after drilling to create a clean & flat base.
- Available with fixed or removable shaft.
- Diameters up to 1500mm.
- Suits Drives PDD-PD10.



HORIZONTAL DRILLING

Digga's horizontal drilling mount allows an auger drive to be mounted horizontally and dropped below ground level for under road boring or reaming. Eliminating the need to remove pavements or roadway for pipe and cable laying.

- Continuous flighted augers available.
- Extend the length of the continuous flight auger with the use of hex joiners and D-Clips.
- Replaceable pilots available.



NOTE: Horizontal borer mount sold separately. Drive unit and frame not included.



MIXER BOWL

Quick, easy and cost effective, convert your auger drive into a cement mixer. Simply remove your auger and connect mixer cradle and bowl to use.

- Easy to install.
- Suits all Digga Auger Drives, Mini Auger Drives and Auger Drives fitted with Swing Control System.
- Maintenance free.

	Small Bowl	Large Bowl
Total Bowl Capacity*	3.9 Cu ft / 110 L	5.7 Cu ft / 160 L
Working Bowl Capacity**	2.5 Cu ft / 70 L	4 Cu ft / 115 L
Weight - Bowl and cradle only	38kg	53kg

NOTE: Bowl and cradle only. Drive unit, hitch or frame not included.



(*) An upright position depicts total capacity.

(**) Maximum operating capacity is measured at an operating angle of 45 degrees.

SWING CONTROL


SWING CONTROL SYSTEM - PATENTED

SCS controls the pendulum action of your auger making it easier to operate and control, safer on the work site and greatly improves operator efficiency and effectiveness. Swing Control requires no additional hydraulics. Unique independent dampening cylinders control the forward/aft and side to side movement.

Swing Control can also be retrofitted to existing auger drives.



- Increased efficiency.
- Increased productivity.
- Increased safety.




SWING WITHOUT SCS



SWING WITH SCS

PILING & FOUNDATION

ENERGY CONTROL VALVE (ECV)

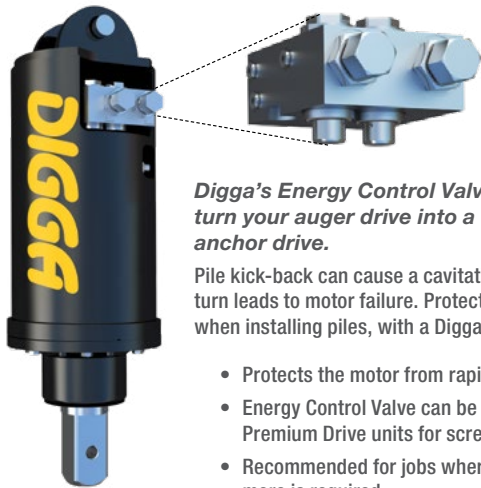

Digga's Energy Control Valve (ECV) lets you turn your auger drive into a dedicated screw anchor drive.


Pile kick-back can cause a cavitation of your motor which in turn leads to motor failure. Protect your auger drive's motor when installing piles, with a Digga Energy Control Valve.

- Protects the motor from rapid oil decompression.
- Energy Control Valve can be fitted most Digga Premium Drive units for screw anchoring applications.
- Recommended for jobs where 16,000Nm of torque or more is required.

TPE - TELESCOPIC PILING & DRILLING EXTENSION

Digga's piling & drilling extensions (TPE) increase your skid steer loader's reach for added drilling depth or screw anchor (pile) installation. Manufactured in-house by Digga in Australia, using only the highest grade materials and strictest quality control, our skid steer and tracked loader extensions are engineered for use with auger / anchor drive units up to 22,000Nm of torque.

- Provides 3.5 – 4 metres of ground clearance for screw anchors or augers.
- Unique design gives the operator greater range and visibility.
- Engineered for drives up to 22,000 Nm.
- Optional Transport Frame.

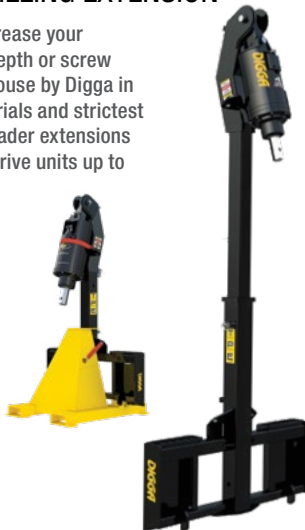

MONITORING EQUIPMENT

TORQUE HUB

Replaces the Kelly Bar adaptor or mount directly onto the drive-head output shaft.

- 99%+ Accurate Torque Measurement.
- Superior design & engineered for tough conditions.
- Wireless in-cab display.
- To suit 75mm Square & 100mm Square shaft sizes.



TORQUE SPOOL

The flanged "spool" option utilises the same patented technology as the Torque Hub.

- 99%+ Accurate Torque Measurement.
- Superior design & engineered for tough conditions.
- Wireless in-cab display.
- To suit drives up to 500,000 Nm.



PRESSURE DIFFERENTIAL GAUGE

Digga's Pressure Differential Gauge offers an accurate way of measuring the hydraulic pressure being applied through the hydraulic motor and gearbox of your drive unit.



DIGGA'S - ALIGNMENT SYSTEM

Diggaalign is ideal for drilling, screw piling & core barrelling applications. Designed to show the operator when the pylon/pile/auger is off plumb, and helps to maintain accuracy throughout the installation.



BIGFOOT TRENCHERS

- Start Trenching with the crumber bar in the down position.
- Adjustable Skid Foot - Ensures the operator trenches to a set depth. Foot is visible from the cab - Ensures that the trencher is in the correct trenching position.
- 3 different chain options - Trench in most ground conditions.
- Australian Made Quality.
- 3 year gear box and 2 year motor warranty.

BIGFOOT TRENCHERS 1 1/8" CHAIN

	MINI BFT	BFT-900
Cutting Depths (mm)	Up to 900	Up to 900
Cutting Width (mm)	100, 150, 200	100, 150, 200
Length (mm)	1402	1920
Horizontal Height (mm)	645	668
Width (mm)	989	1212
Weight - 150mm Combo Chain (Kg)	TBA	261
Motor Size	2K Bell EATON	2K Bell EATON
Hydraulic Flow (LPM)	40-90	50-95
Max Pressure - Do not exceed (BAR)	240 bar @ 60 lpm	240 bar @ 60 lpm
Max Flow - Do not exceed (LPM)	95 lpm @ 200 bar	95 lpm @ 200 bar
Max Continuous Power (Kw)	25 Kw (34 hp)	25 Kw (34 hp)

BIGFOOT XD TRENCHERS - 2" CHAIN

	BFTXD 900	BFTXD 1200	BFTXD 1200HF	BFTXD 1500HF
Cutting Width (mm)	150, 200, 250, 300			
Cutting Depths (mm)	Up to 900	Up to 1200	Up to 1200	Up to 1500
Length (mm)	2225	2532	2532	2689
Horizontal Height (mm)	777	777	777	836
Width (mm)	1212	1212	1212	1212
Weight - 150mm Combo Chain (Kg)	388	405	424	461
Motor Size	2K Bell EATON	2K Bell EATON	6K Bell EATON	6K Bell EATON
Hydraulic Flow (LPM)	60-115	60-115	105-170	105-170
Max Pressure - Do not exceed (Bar)	240 bar @ 60 lpm	240 bar @ 130 lpm		
Max Flow - Do not exceed (LPM)	95 lpm @ 200 bar	170 lpm @ 180 bar		
Max Continuous Power (kw)	25 Kw (34 hp)	50 Kw (67 hp)		



HYDRIVE TRENCHERS

The Hydrive trencher is fitted with twin spoil augers for efficient spoil removal to both sides of the trench. The 3 point drive system allows for more usable horse power, providing greater efficiency for the trenching professional.

	HDT-900	HDT-1200	HDTXD-1200
Cutting Depths (mm)	Up to 900	Up to 1200	Up to 1200
Cutting Width (mm)	100, 150, 200, 250, 300		150, 200, 250, 300, 350
Length (mm)	1888	2160	2478
Horizontal Height (mm)	802	802	957
Width (mm)	1212	1212	1212
Motor Size	2K Bell EATON	2K Bell EATON	2K Bell EATON
Hydraulic Flow (LPM)	50-80	50-80	60-115
Max Pressure - Do not exceed (BAR)	240 bar @ 60 lpm		240 bar @ 60 lpm
Max Flow - Do not exceed (LPM)	75 lpm @ 200 bar		115 lpm @ 130 bar
Max Continuous Power (Kw)	25 (34 hp)		25 (34 hp)



CHAINS

All Digga trenchers are available with a variety of chain types and widths to suit your individual needs. We only use anti back flex chains to give you better performance.



EARTH

Cup tooth on every second station. Best for soft clean ground with no floaters or tree roots.



COMBO

Combination of earth and tungsten teeth. Suitable for most applications. Cuts through hard soils, roots, soft shale and rocky ground.



DIGGATAC

Full tungsten teeth on every station. Best for rocky hard shale, asphalt and frozen ground.

4 IN 1 BUCKETS

Australian designed and manufactured using only the highest quality components and materials. Digga has an extensive bucket range designed to suit Skid Steer Loaders of all sizes.

- Full range available from 880mm to high volume 2200mm.
- Grabbing teeth profiled on both front/rear overlap for greater grip of logs or other debris.
- Side curved sections create greater opening bucket width of 860mm.
- 1 piece heavy duty fully welded design for clear vision of front bucket edge.
- Heavy duty steel 20mm floors on standard range.
- Optional reversible bolt on cutting edge for all 3 edges of the bucket.
- Optional chisel or tiger teeth, pin on design.



TILTING BUCKET (6 IN 1)

Tilting 4 in 1 Bucket provides the operator with full radial control of the cutting angle. Slim line tilt frame design minimising additional weight and distance from the machine maximising the full lift capacity of the machine.

- Full range available from 1550mm to high volume 2130mm.
- Fully enclosed, integrated valve block, with built in locking valve and STC hydraulic fittings providing compact secure protection to all hydraulics.
- Hydraulic ram geometry creates exceptional tilting forces.
- Hardened wear plates to increase wear life on moving parts of tilt mechanism.



BUCKET ACCESSORIES

BUCKET ACCESSORIES



QUICK RIPS

Suitable for ripping soils and clay.

- Easy 4 in 1 bucket .
- pickup design.
- Kwik rips available in either 3, 5 or 7 tynes.



SPREADER BARS

Most standard sizes available, other sizes available on request.

- Easy 4 in 1 bucket pickup design.
- Suitable for spreading/levelling soils.
- Spreader available in various lengths and widths.

GENERAL PURPOSE BUCKET

The Digga General Purpose Bucket is ideal for grading, scraping, dozing dirt and material spreading. Features include a low profile design, convenient steps for safe easy cab access and heavy duty wear strips.

- Full range available from 1450mm to high volume 2200mm.
- Low profile design.
- Heavy duty wear strips.
- Optional cutting edge.
- Australian made quality.



ROCK BUCKET

The Digga Rock Bucket is used for fast clean-ups, sifting out debris & rocks, and gathering material away from buildings and obstructions. Rock buckets can also be used in waste processing applications.

- 4 sizes available, ranging from 1740mm (68") to 2222mm (87").
- Manufactured from solid 28mm 1045 grade steel round bar.
- 52mm (2") tyne spacing.
- Available with built-in skid steer mounting frame or optional bolt-on universal skid-steer and tractor loader mounts.



GRAPPLE ATTACHMENT OPTIONS

Hydraulically operated, the grapple is fitted to a rock bucket to provide a grabbing arm to trap and contain debris such as rocks, branches and shrubbery.

- Easy to assemble with replaceable grapple teeth.
- Grapple fits 1740mm, 1900mm, 2060mm and 2222mm rock buckets.
- Wide opening grapple with aggressive rake-back tyne design.



*Not suitable for Kubota SSV models

DOZER BLADE

The Dozer Blade is a versatile attachment for dozing, levelling ground and general earthmoving work.

- Universal skid steer loader quick-attach mounting.
- Large 3" centre pivot pin with hardened steel bushings.
- Full length high carbon steel replaceable skid shoe.
- Reversible 3/4" x 200mm bolt-on cutting edge & formed moldboard 8mm thick & 700mm high.
- Angle & tilt cylinders are interchangeable and equipped with self-aligning bushings.
- Optional electrical switch, plug'n'go 8 pin skid steer connection, and electrical control box.

Model	2100mm			2400mm		
	FIXED BLADE	ANGLE ONLY	ANGLE AND TILT	FIXED BLADE	ANGLE ONLY	ANGLE AND TILT
Weight (Kg)	283	475	519	315	507	590
Height (mm)	725			762		
Width (mm)	2133			2400		
Width at 15° angle (mm)	N/A	2082		N/A	2318	
Width at 30° angle (mm)	N/A	1880		N/A	2078	
Angle left & right	N/A	±30°	±30°	N/A	±30°	±30°
Angle tilt	N/A	N/A	±14°	N/A	N/A	±14°



BUCKET BROOMS

Sweep and collect all kinds of debris in factories, car parks, road construction, stock yards, shipping containers and more.

- Easy to use built-in-brush adjustment handles.
- Replaceable cutting edge on bucket.
- 24" replaceable 1 piece poly brush.
- 1600mm to 3000mm widths available.
- High Flow models available upon request.

	Standard Models	High Flow Models
Rec Flow Range (LPM)	30-75	75-230
Max Pressure (BAR)	205	240



ANGLE BROOMS

- 1800mm to 2500mm models available.
- Quick adjust support legs for easy storage and connection.
- Heavy duty adjustable jockey wheel.
- Bi-directional slew presets 15° or 30° from centre.
- 24" replaceable 1 piece Poly Brush.

Rec Flow Range (LPM)	30-75
Max Pressure (BAR)	205



OPEN FACE BUCKET BROOM


An open face broom is a bucket broom with an open front allowing you to sweep right up against walls and gutters.

	Standard Models	High Flow Models
Max Flow (LPM)	75	230
Max Pressure (BAR)	205	240

- 1 piece poly brush for longer brush life and easy replacement.
- Sizes available; 1600mm, 1800mm and 2000mm.
- Replaceable machine pickups for multiple machine use.
- Height adjustable.
- High flow models available.
- Easy to empty bucket.



15° OR 30° BI-DIRECTIONAL SLEW FROM CENTRE

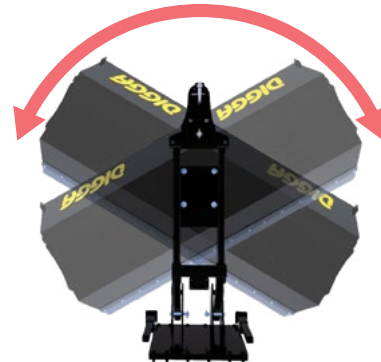

PALLET FORKS

Australian made pallet forks, quality tested to ensure strength and reliability.

TO SUIT MULTIFIT SKID STEERS

- Tyne Bar Locking System (Patent Pending).
- Easy width adjustment with lockable tyne positions.
- Tynes load rating tested to ISO 2330 Standards.
- 1500kg and 1800kg load ratings available.
- Safety guard folds down for compact storage.
- Machine entry step can be mounted on either side.



	1500kg	1800kg
Weight (kgs)	138	157

TO SUIT NON MULTIFIT MACHINES

- Load rating tested to Australian standards AS2359.1.
- 1200kg, 1600kg and 1900kg load ratings available.
- Bale spears/pallet fork combo frame also available.



	1200kg	1600kg	1900kg
Weight (kgs)	146	165	173

EZI LOADA RAMPS

A light weight loading ramp with enhanced safety that delivers on quality, performance and is cost effective. European designed and engineered, the new Digga Ezi-Loada ramps feature the most advanced design in the Australian market today. Digga's new aluminium loading ramps include a Standard range - LR (1.5t to 6.2t) & a Universal range - LRU (5.2t to 9t).

- 3 different connection options.
- Enhanced rail strength.
- Patented, extruded, double T rail with interlocking rung design.
- Superior strength and durability.

Code	Tonnage	Length	Beam	Int Width	Ext Width	Weight
LR152530	1.5	2500mm	64mm	255mm	300mm	14kg
LR233030	2.0	3000mm	100mm	300mm	360mm	23kg
LR303030	3.0	3000mm	115mm	300mm	360mm	26kg
LR303535	3.0	3500mm	120mm	350mm	410mm	36kg
LR353535	3.5	3500mm	125mm	350mm	410mm	37kg
LR403545	4.0	3500mm	140mm	450mm	510mm	46kg
LR473545	4.7	3500mm	155mm	450mm	510mm	46kg
LR473550	4.7	3500mm	165mm	500mm	560mm	51kg
LR593545	5.9	3500mm	150mm	450mm	510mm	53kg
LRU593550	6.2	3500mm	150mm	500mm	560mm	60kg
LRU663550	7.0	3500mm	170mm	500mm	560mm	61kg
LRU823550	9.0	3500mm	180mm	500mm	560mm	77kg

STANDARD (LR)



UNIVERSAL (LRU)

ROAD PROFILER

The Digga Profiler is perfect for planing (mill) rock, concrete and asphalt.

- Digga planetary drive delivers high torque.
- Standard and high flow models available.
- Independent self-levelling depth adjustment plates which allow for precise lapping cuts and taper cuts.
- High rear spoil clearance to prevent recirculation of material.
- Convenient ergonomic electro-hydraulic control joystick for depth, tilt and side shift standard.
- Water nozzle kit for dust suppression supplied as standard. (water tank sold separately).
- 300mm Standard Flow Model.
- 450mm and 600mm High Flow Models.

	Standard Flow	High Flow
Rec Flow Range (LPM)	45-84	90-166
Max Pressure (BAR)	240	240



Water tank sold separately



VIBRATORY ROLLER

These high production rollers are ideal for rental fleets, contractors, landscaping, roadways, walk ways, bike paths, golf courses, bridges and parking lots.

- Versatile compaction unit for use on sand, gravel, soils, crushed stoned and other aggregates.
- Delivers up to 3500kg of dynamic force when operating at 95 lpm.
- Steel drum has an adjustable steel scraper blade between frame and drum ensuring smooth and uniform compaction performance.
- Hydraulic drives for this roller are fully isolated and protected to provide maximum performance and reliability.
- Padded Foot Roller also available.

	66"	84"
Drum widths (mm)	1675	2133
Dynamic Force (kgs)	3500	4250
Weight (kgs)	957	1147
Max Flow (LPM)	95	95



VEGETATION MANAGEMENT STICK RAKE

Ideal for fast clean-ups, vegetation management, sifting soil/rocks and removing unwanted shrubbery and overgrowth. Material can be sifted and sorted to clear out unwanted debris and leave good soil or material behind. Available for multifit and Cat skid steer loaders.

- 2133mm rake width (84”).
- Heavy duty 16mm thick tynes.
- Optional Safety Guard.
- Convenient steps on either side for easy cab access.

Length (mm)	2133
Height (mm)	800
Width (mm)	492
Tyne Spacing (mm)	158
Number of Tynes	13
Weight (Kg)	290



VEGETATION MANAGEMENT SLASHER

Grass slashing attachment for effective cutting and clearing of grass and low ground shrubbery.

- Twin blade, dual rotation, single cutting bar.
- Available with fixed or side shift frame.
- Rounded side skids for smoother manoeuvrability over uneven terrain.
- 3 width options; 1250mm (49”), 1500mm (59”), 1800mm (70”).
- Optional Jockey Wheel.
- Adjustable cutting height 40 - 140mm.

Rec Flow Range (LPM)	20-80
Max Pressure (BAR)	240



VEGETATION MANAGEMENT ROTARY AXE

Digga's heavy duty 72" Rotary Axe is the ultimate attachment for clearing and shredding thick bush and scrub. Working in conjunction with the heavy duty push bar, the front hood opens up exposing the $\frac{3}{4}$ " blades past the guards, enabling close up axe-like cuts to remove trees up to 7" (180mm) in diameter.

- Includes: Stump grinding carbide teeth to increase shredding performance and allow stump removal.
- 72" Cutting width with alternating bevel blade design - providing a deep penetrating, axe-like, self-clearing cut.
- Blades are made of $\frac{3}{4}$ " thick high grade steel with a reversible design for added blade life.
- Heavy duty construction allows for lower centre of gravity and better stability on hillsides.
- Highly visible pressure gauge - Prevents excessive stalling which would otherwise cause overheating, providing feedback to the operator to help maintain peak performance.

Recommended Flow (LPM)	115-170
Max Pressure (BAR)	275
Weight (kg)	911
AOL Width (mm)	1966



VEGETATION MANAGEMENT MULCHER

The Digga Magnum Mulcher provides High Flow Skid Steer Loaders with the versatility of grinding small and large material, tree or brush even above ground stumps with just one operator. Ideal for clearing fire breaks, land clearing, maintenance of park or forestry trails, vegetation management and re-mediation.

- Hydraulic driven, self aligning belt drive; low maintenance and great durability.
- Fixed hammers with replaceable carbide teeth.
- Shreds up to 8" diameter hardwood trees.
- Adjustable push bar.
- Skid Steer model comes standard with oil cooler.
- On-board pressure gauge easily viewed from operator's station to monitor system on units fitted with oil coolers.
- Replaceable abrasion resistant AR400 wear plate on skid shoes.
- Deflector door standard to control particle size and discharge direction.
- 60" (1500mm) cutting width.

Rec Flow Range (LPM)	115-170
Weight (kg)	1150
Width (mm)	1850



LANDSCAPING RAKES

POWER RAKE

The fully hydraulic Digga Power Rake grades, levels, rakes and removes debris, pulverising and preparing the ground for a new seed bed or turf. De-thatched or remove old lawns and weeds all with one tool.

- Heavy-duty frame extends life.
- Hydraulic angling up to 20° either direction.
- Dual direct-drive motors deliver up to 40% more power to the drum eliminating drive chains and sprockets, reducing power loss to the drum and maintenance costs.
- Bi-directional drum works soil in both directions.
- Slews for windrowing debris.
- 1828mm (72") and 2286mm (90") models available.

Rec Flow Range (LPM)	45-150
Max Pressure (BAR)	240



HARLEY RAKE

The most versatile attachment you will ever own. Pulverise and prepare seedbed, de-thatch or remove old lawns and weeds all with one tool. Cut drainage grades, skim passes for over-seeding or prepare and condition job sites for seeding. Remove rock and other debris by windrowing or make a pile for easy pick-up with your loader bucket.

- Single hydraulic motor.
- Pure carbide teeth for longer life.
- Dual independently adjustable gauge wheels.
- Adjustable urethane barrier.
- Slews for windrowing debris.
- 1473mm, 1727mm, 2006mm and 2159mm models available.

Rec Flow (LPM)	30-64
Max Flow (LPM)	75-94



ROTARY TILLER

The ideal attachment for ground preparation prior to turfing, planting and seeding. Turns the toughest ground into a beautiful garden bed.

- Replaceable dual rotation and bi-directional tynes allow for effective cultivation of up to 150mm depth.
- Unit has two position off-set mount for easier tilling close to obstacles.
- Front edge is designed to level out uneven ground and touch ups.
- Can be used with or without adjustable height scarifier (optional).
- Single motor requiring less maintenance.

Rec Flow (LPM)	52-64
Max Pressure (BAR)	240
Weight (kgs)	453
Overall Width (mm)	1930
Operating Width (mm)	1676



STUMP GRINDER

Remove tree stumps into wood chips quickly with the Digga Stump Grinder. Fingertip controls have been designed into the unit to allow the operator to adjust the speed of swing and lift functions to accommodate the machine & operator's maximum performance.

- Grinds stumps up to 255mm below ground.
- 28 Carbide tipped cutting teeth.
- 60° Range of motion covers 1100mm in a single sweep.
- Tooth pattern allows side to side and vertical cuts.
- Easy access to all drive components for maintenance.

Rec Flow (LPM)	60-80
Wheel Diameter (mm)	660
Weight (kgs)	326



OTHER ATTACHMENTS

SKID HOE

Quick fit attachment for digging trenches and footings up to 1.7m deep. Fitted standard with 300mm (12") bucket.

- 250mm, 300mm, 350mm, 400mm, 450mm bucket options.
- Manual side shift frame for optional off centre digging.



DEBRIS CLEANER

Quality Australian made debris cleaner for use in removing overspill and debris from under conveyer belts in manufacturing and mining applications.

- Available in 2800mm and 3300mm reach.
- Hydraulic slew Up to 87°.
- Replaceable 350mm paddles & teeth.



TILT ATTACH

Fully utilise your skid steer loader attachment with the powerful Tilt Attach. Fitted between the machine pick up and the attachment, it provides the versatility to tilt a multitude of attachments.

- Allows 18° left or right tilt off centre line.
- Tilts bucket and landscaping implements for more precise grading, levelling and trenching.



SKID STEER LOADER ATTACHMENTS

DIGGA

WWW.DIGGA.COM



PH: 1300 2 DIGGA
34442

FOR FURTHER INFORMATION PLEASE
CONTACT YOUR LOCAL AUTHORISED DIGGA DEALER

QLD / NT

Email: info@digga.com

VIC / SA / TAS

Email: vic@digga.com

NSW / ACT

Email: nsw@digga.com

WA

Email: sales@diggawest.com.au

Digga NZ

Ph: +64 9262 3500

Email: sales@digga.co.nz

IMPORTANT: The attachments shown in this brochure are for illustrative purposes only and may include some non-standard optional extras. All specifications should be regarded as approximate only. For full details contact your Digga Dealer. In the interest of product improvement, Digga reserves the right to change these specifications without prior notice.