


Tool Needed: Phillips screwdriver

..kua[®]t..
(koo-at)

1. Start with rack in the stored position.
Remove the three phillips screws from the lower cap.
2. Slide the cap out.

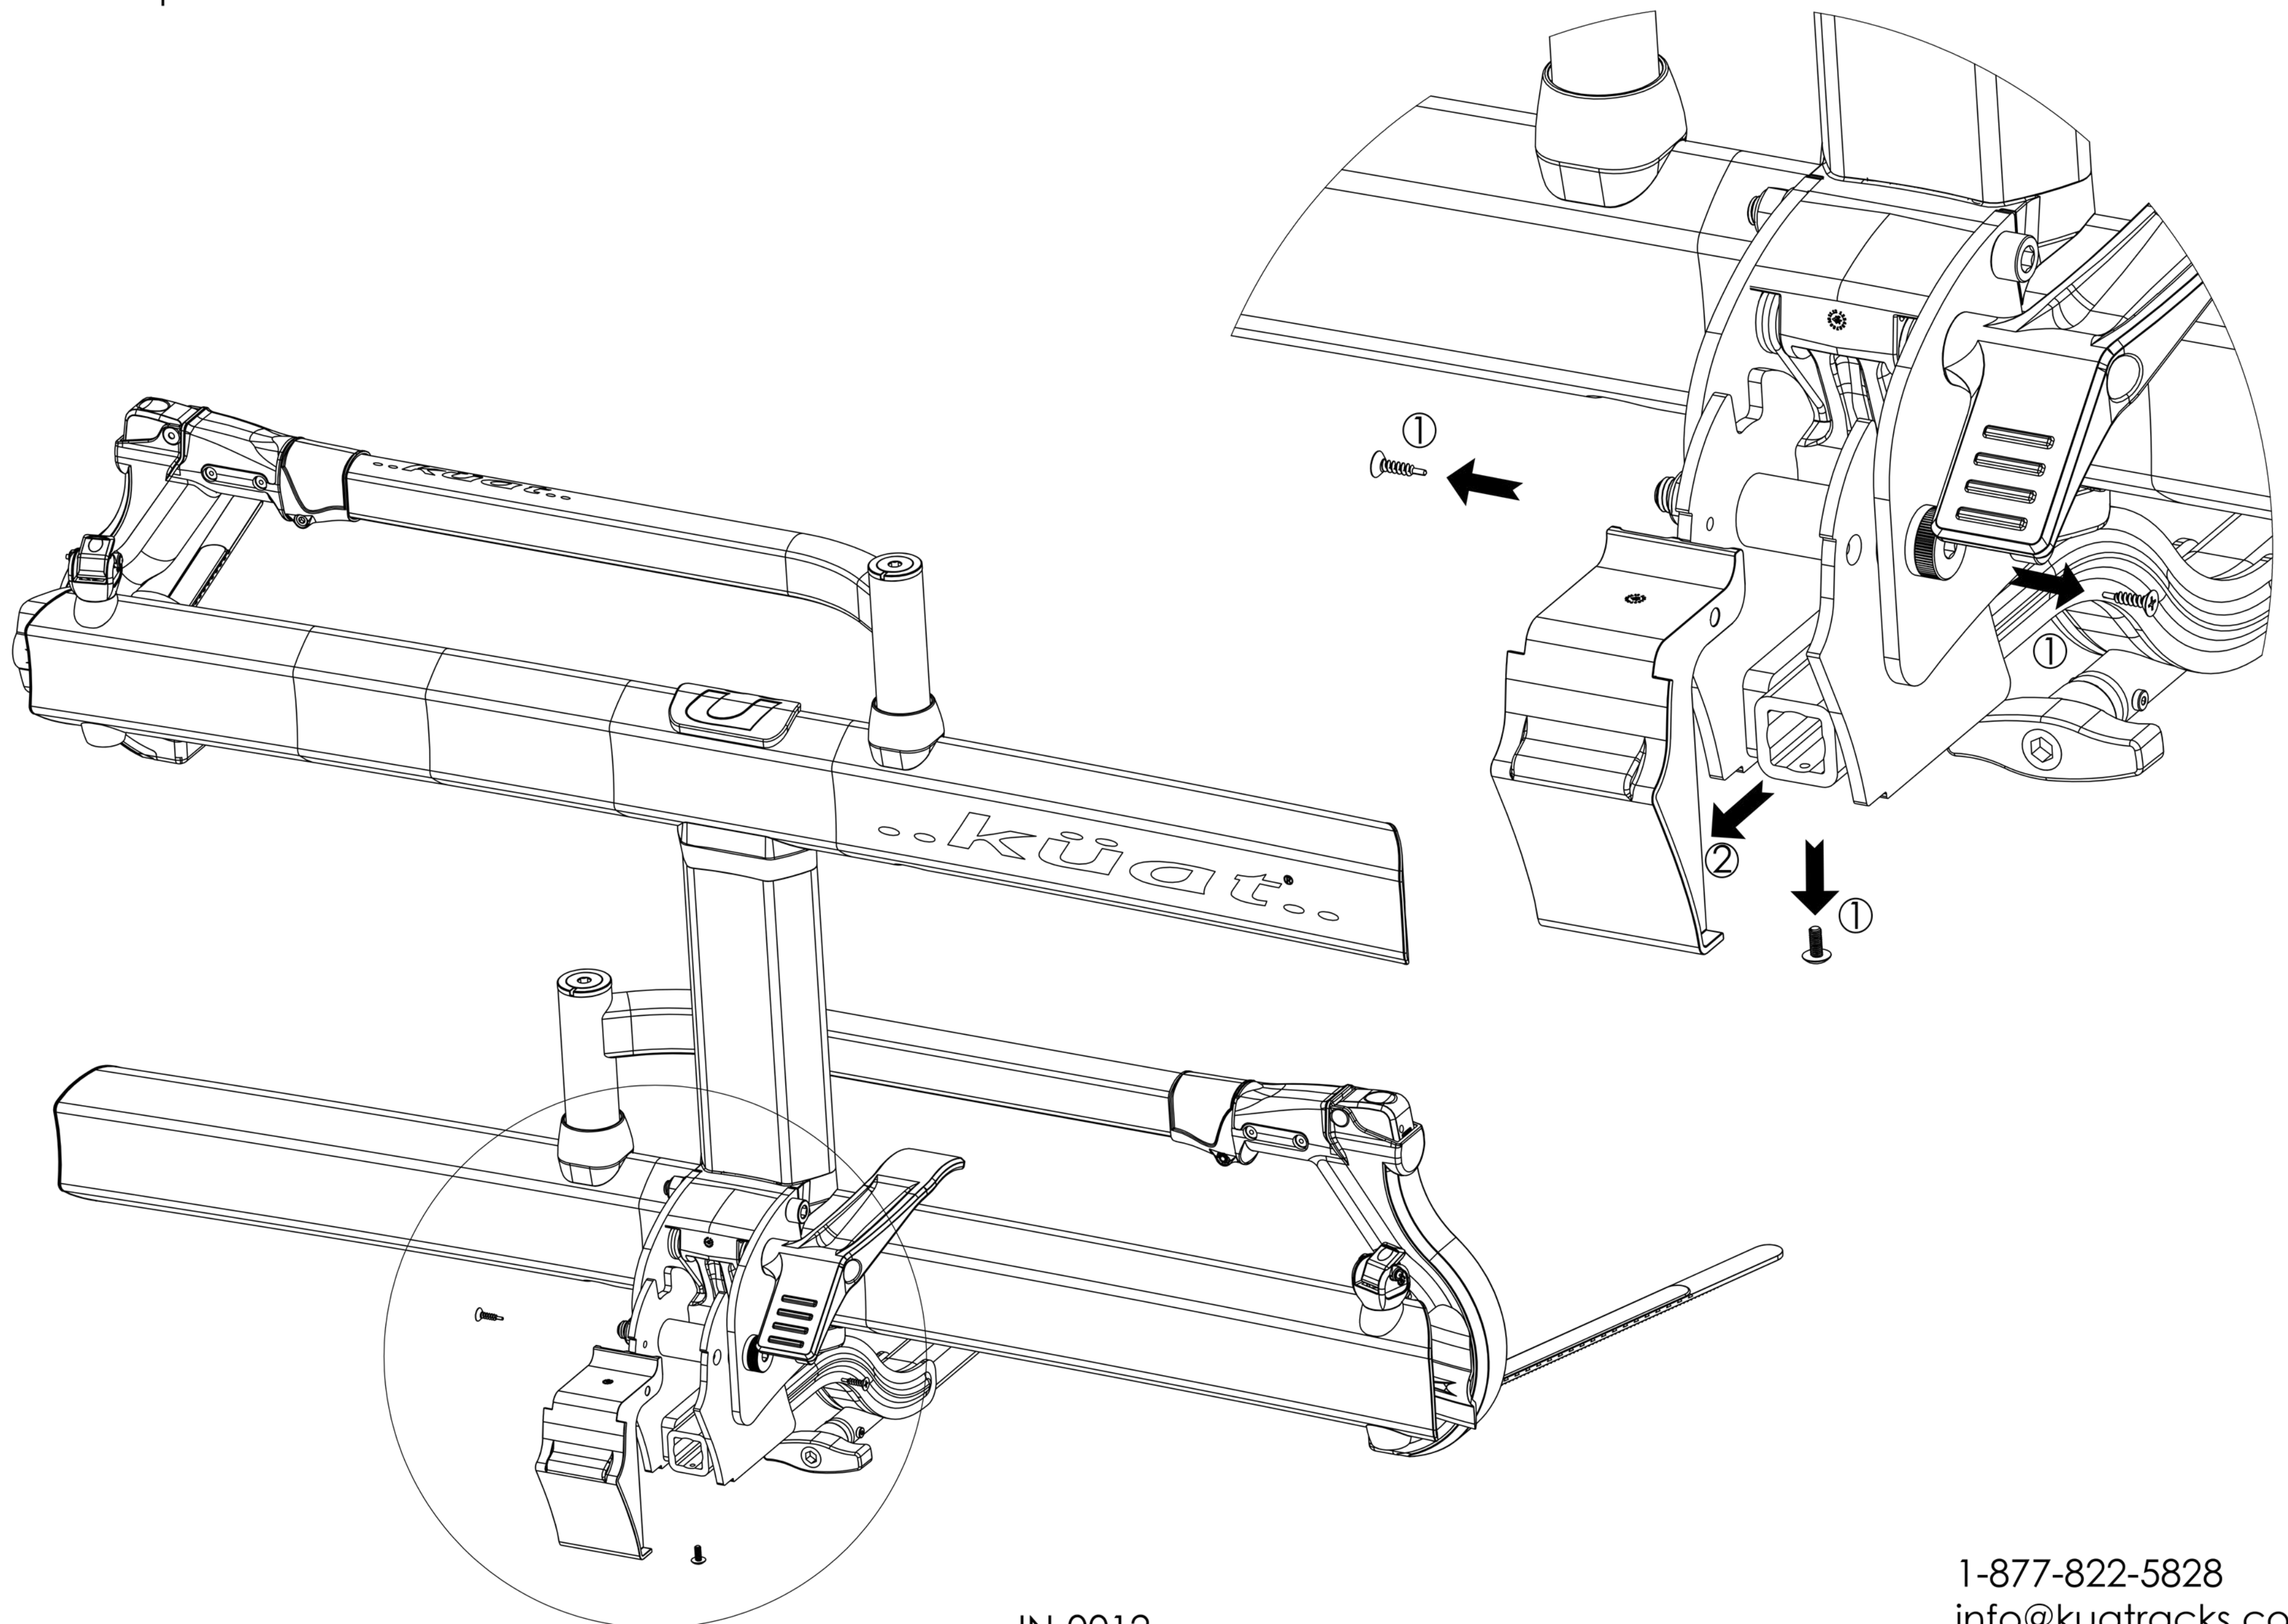

IN-0012

1-877-822-5828
info@kuatracks.com