
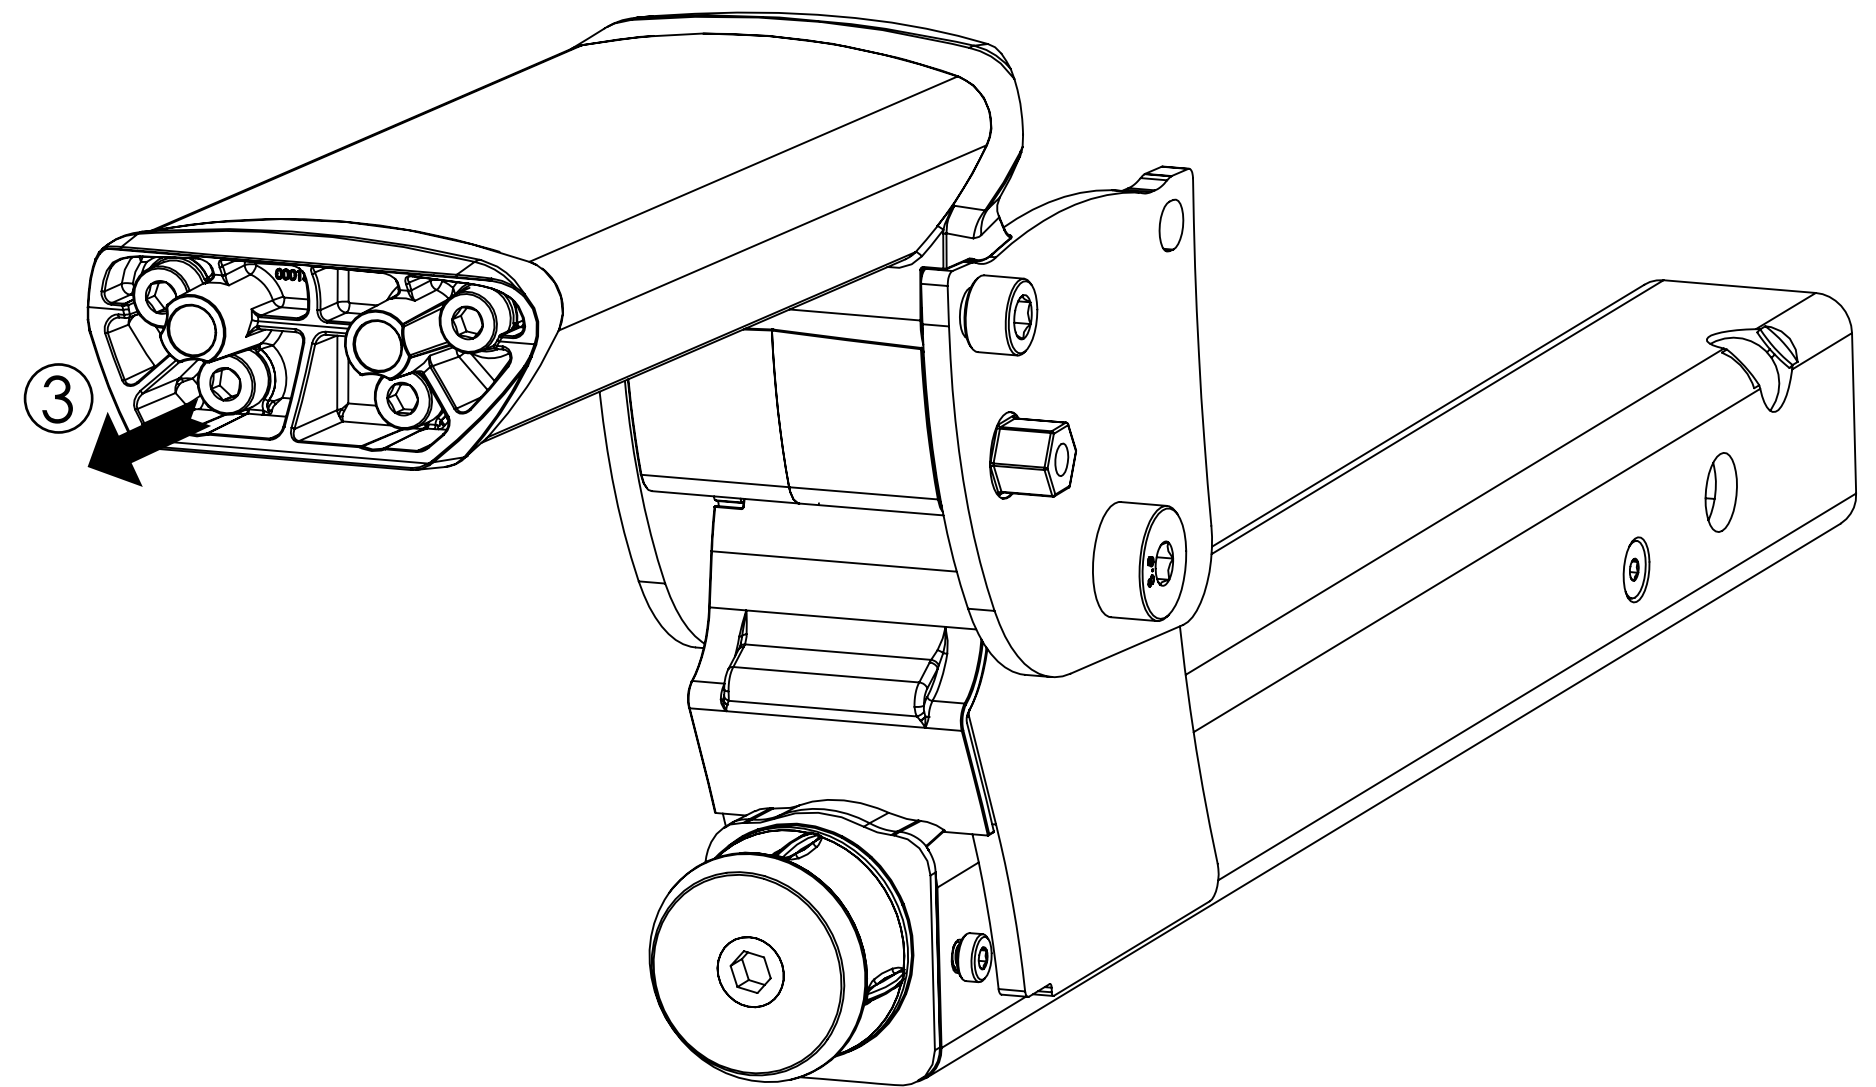


Tool Needed: 8mm Hex Key, and a 6mm Hex Key

**..kuat..**<sup>®</sup>  
(koo-at)

1. Loosen two 10mm bolts with the 8mm hex key and remove them from the rack.
2. Slide the front cap and tray off the rack.
3. Remove four 8mm bolts with the 6mm hex key.

Note: When replacing bolts in step 1, tighten to 15ft-lbs (20Nm).  
Alternating bolts between each turn.  
Excessive tightening will damage the rack.

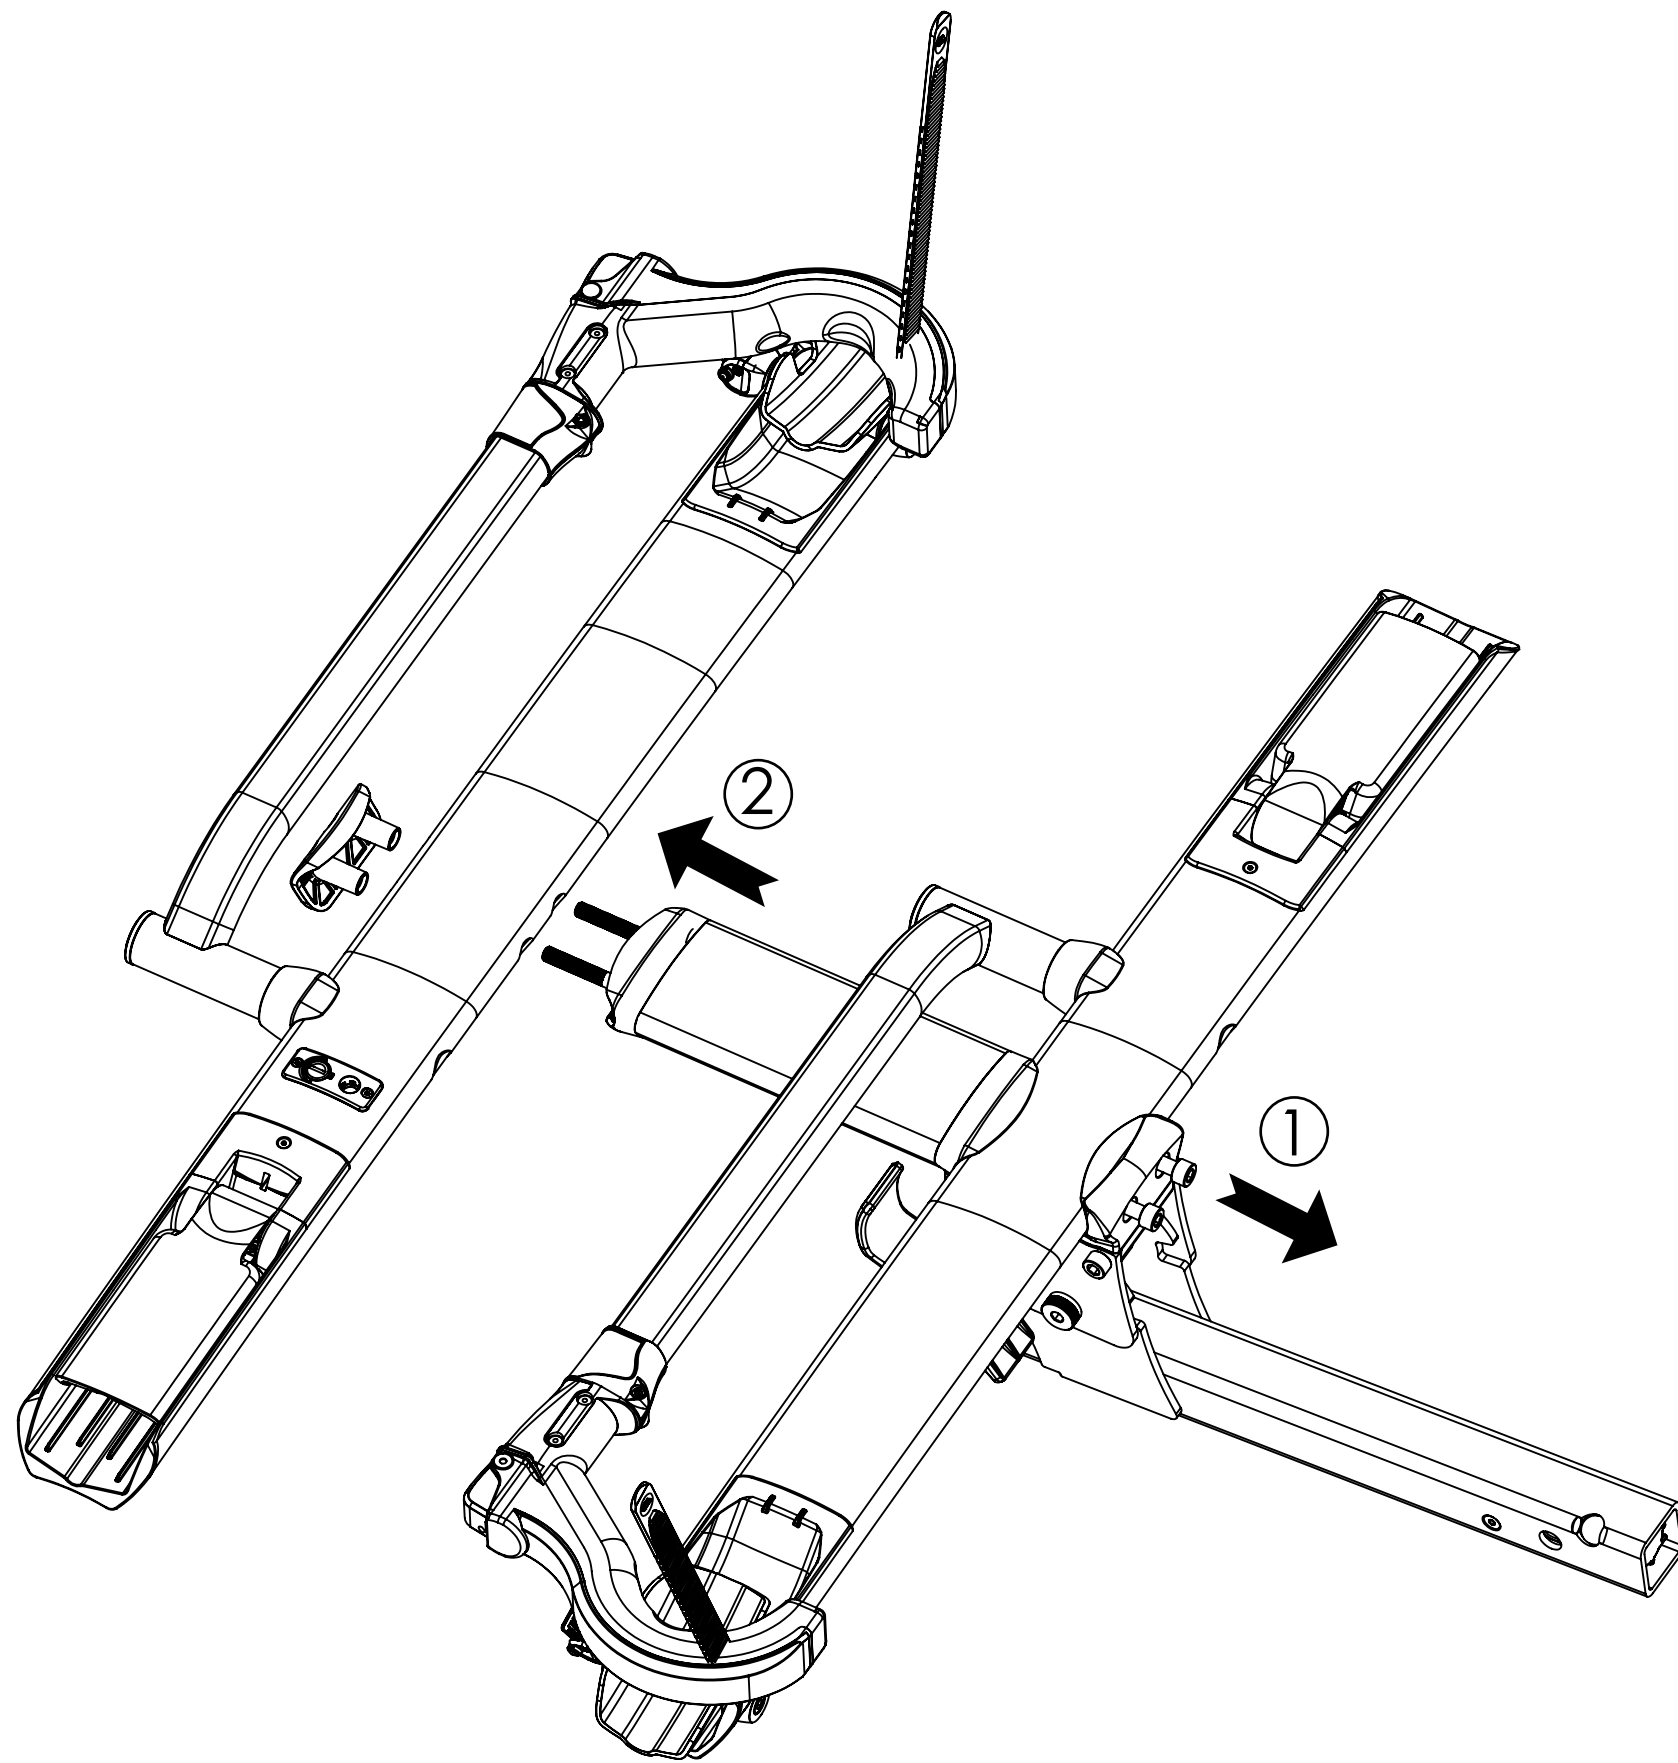

For further assistance  
check out our video  
instructions.



[kuat.us/sherpa2](https://kuat.us/sherpa2)

IN-0038

1-877-822-5828  
[info@kuatracks.com](mailto:info@kuatracks.com)