


Tools Needed: 6 mm Hex Key, Plastic Scraper, Isopropyl Alcohol,
Scissors

kuat[®]

1. Using the 6 mm Hex Key, remove the four Cross Bar Bolts.
2. Team lift the Roof Panel off of the rack and flip the Panel upside down.
3. Peel the old Weather Stripping off of the Roof Panel. The Plastic Scraper and Isopropyl Alcohol can be used to help remove the old Weather Stripping and provide a clean surface.
4. Unroll the new Weather Stripping and cut it to length using the Scissors.
5. Peel the adhesive backing and stick the new Weather Stripping to the Roof Panel.
6. Follow Steps 1 & 2 in reverse to reinstall the Roof Panel. Torque the M8 Crossbar bolts to 20 Nm.

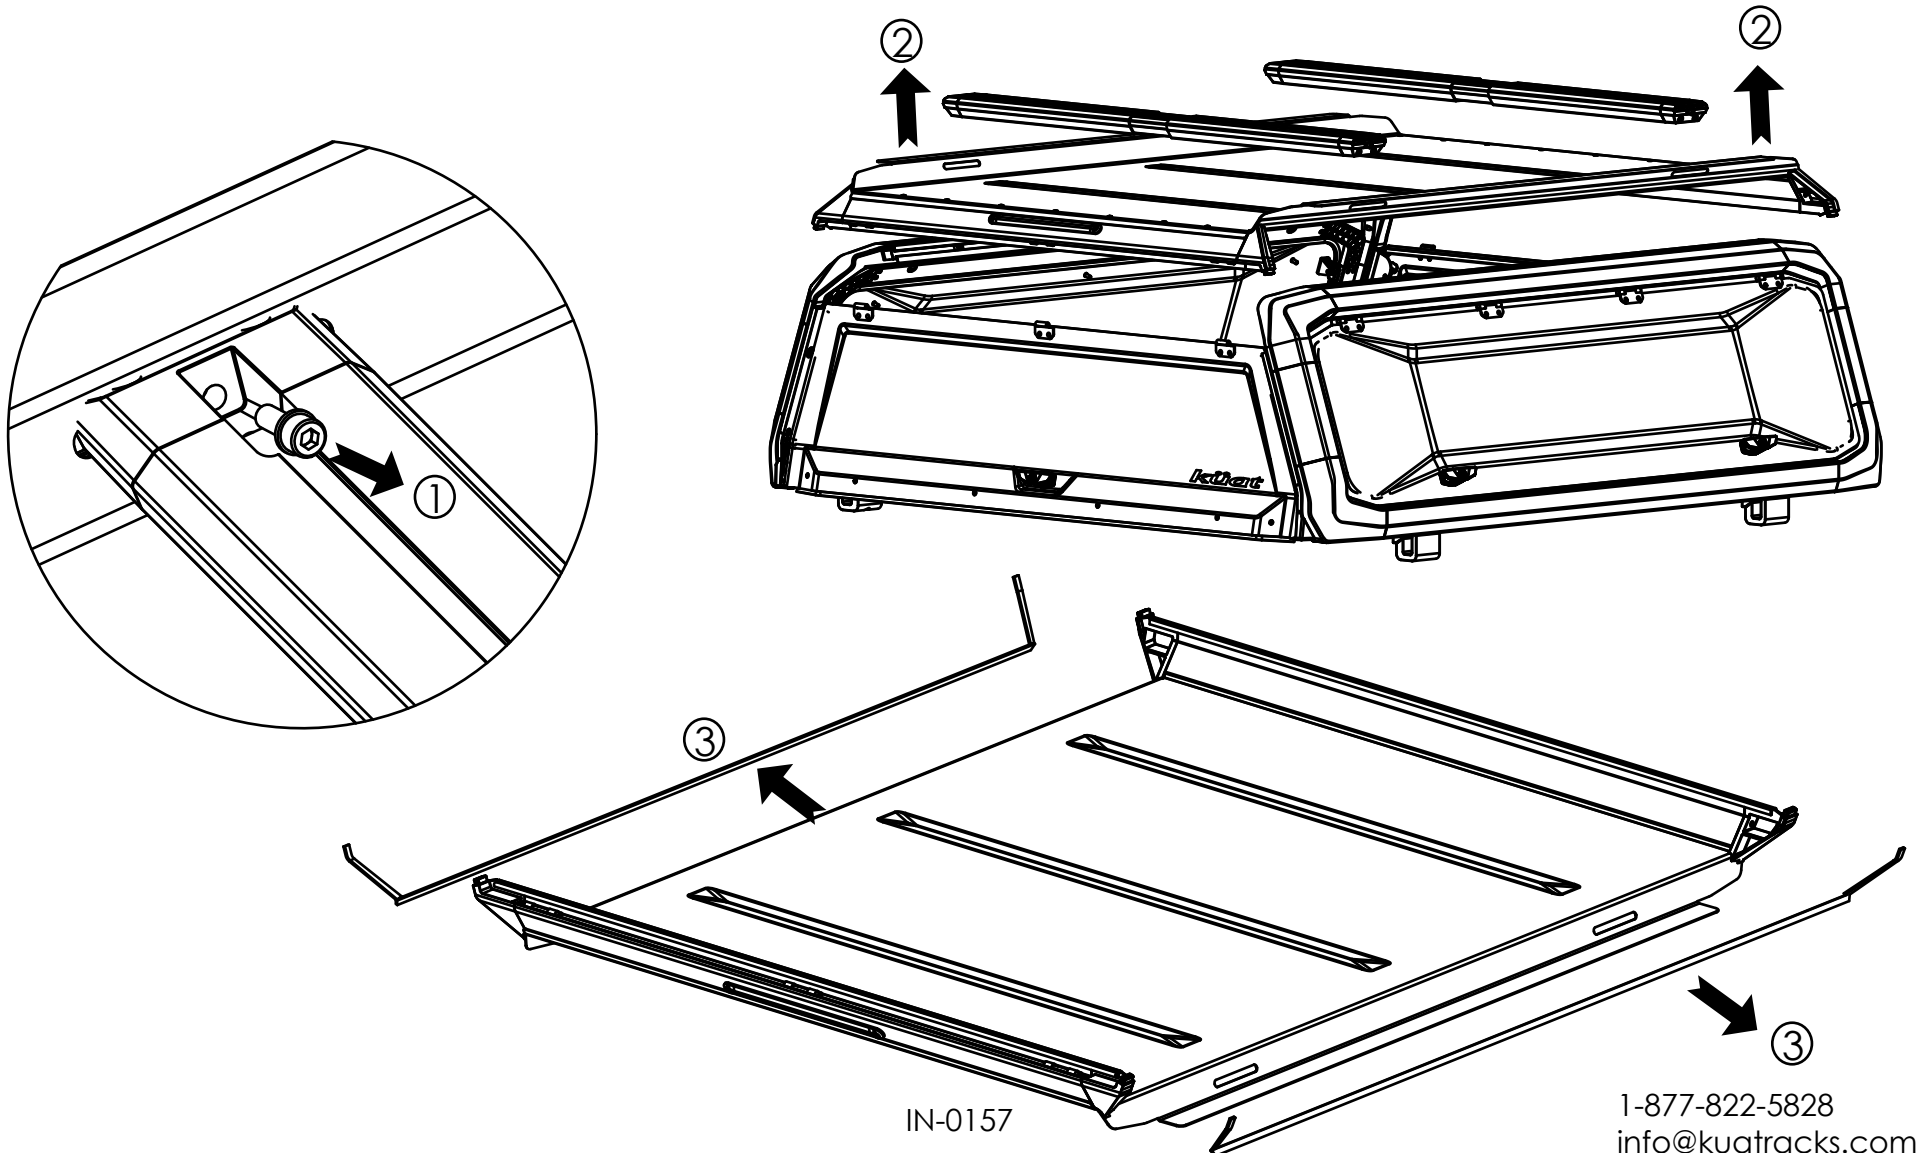

1-877-822-5828
info@kuatracks.com