


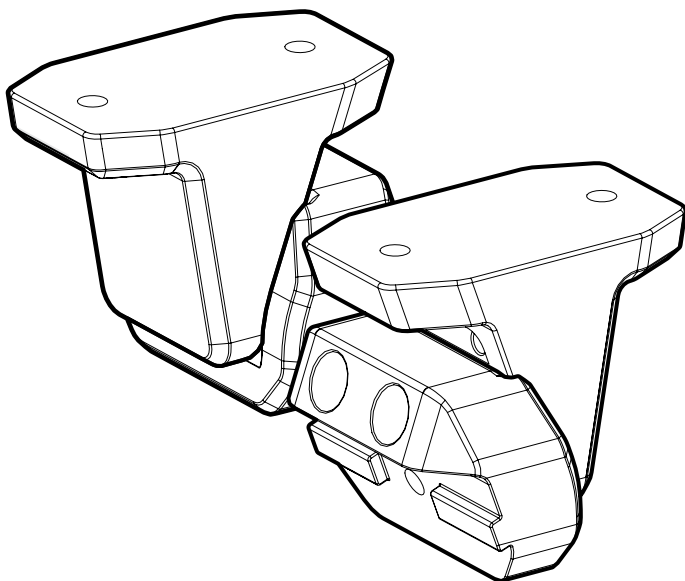


IBEXTM

PANEL KIT

CROSSBAR RISER

ASSEMBLY



ASSEMBLY VIDEO

SAFETY INSTRUCTIONS

IBEX™

PANEL KIT

CROSSBAR RISER

WARNING

- Follow instructions for proper assembly, installation and use.
- Check tightness of all bolts and screws periodically.
- This product is not designed for and should not be used on terrain which requires aftermarket upgrades to your 4WD suspension, or use that includes rock-crawling, jumping, bogging, or high speed off road driving. An experienced overland driver is required to take into consideration the speed of the vehicle and the total weight of the vehicle load and its distribution when encountering rutted and/or rocky terrain when using this product, and must reduce the load, speed, or both as necessary.
 - Smooth gravel roads are not considered off-road.
- Modifying the front panel by drilling or cutting will weaken the panel.

If you have questions or problems, please contact Küat directly by calling toll free 1(877)822-KUAT, or by email: info@kuat.com


ADVERTENCIA

- Siga las instrucciones para un montaje, instalación y uso adecuados.
- Verifique periódicamente el apriete de todos los pernos y tornillos.
- Este producto no está diseñado y no debe usarse en terrenos que requieran mejoras de posventa en su suspensión 4WD, o uso que incluya arrastrarse por rocas, saltar, hacer bogging o conducir a alta velocidad fuera de la carretera. Se requiere que un conductor terrestre experimentado tenga en cuenta la velocidad del vehículo y el peso total de la carga del vehículo y su distribución cuando encuentre terreno con baches y/o rocoso al usar este producto, y debe reducir la carga, la velocidad o ambas según sea necesario. necesario.
 - Los caminos de grava lisa no se consideran todoterreno.
- Modificar el panel frontal mediante perforación o corte debilitará el panel.


AVERTISSEMENT

- Suivez les instructions pour un assemblage, une installation et une utilisation appropriés.
- Vérifiez périodiquement le serrage de tous les boulons et vis.
- Ce produit n'est pas conçu et ne doit pas être utilisé sur des terrains qui nécessitent des mises à niveau de rechange de votre suspension 4WD, ou une utilisation qui inclut l'escalade de roches, les sauts, les embourbages ou la conduite hors route à grande vitesse. Un conducteur terrestre expérimenté doit prendre en considération la vitesse du véhicule et le poids total de la charge du véhicule ainsi que sa répartition lorsqu'il rencontre un terrain orné et/ou rocheux lors de l'utilisation de ce produit, et doit réduire la charge, la vitesse ou les deux comme nécessaire.
 - Les routes de gravier lisses ne sont pas considérées comme hors route.
- La modification du panneau avant par perçage ou découpe affaiblira le panneau.


Parts




(4) Panel Kit Crossbar
Riser Mounts




(4) Panel Kit Crossbar
Riser Towers

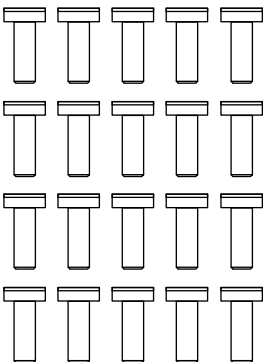


(20) M8 x 55 Bolts



(20) Washers



(24) T-Nuts



(1) 5mm Hex Key




(1) 6mm Hex Key



(1) 6mm Impact Bit


Crossbar Riser Mount Installation

- 1 Remove IBEX™ crossbars leaving existing T-Nuts in their current locations.

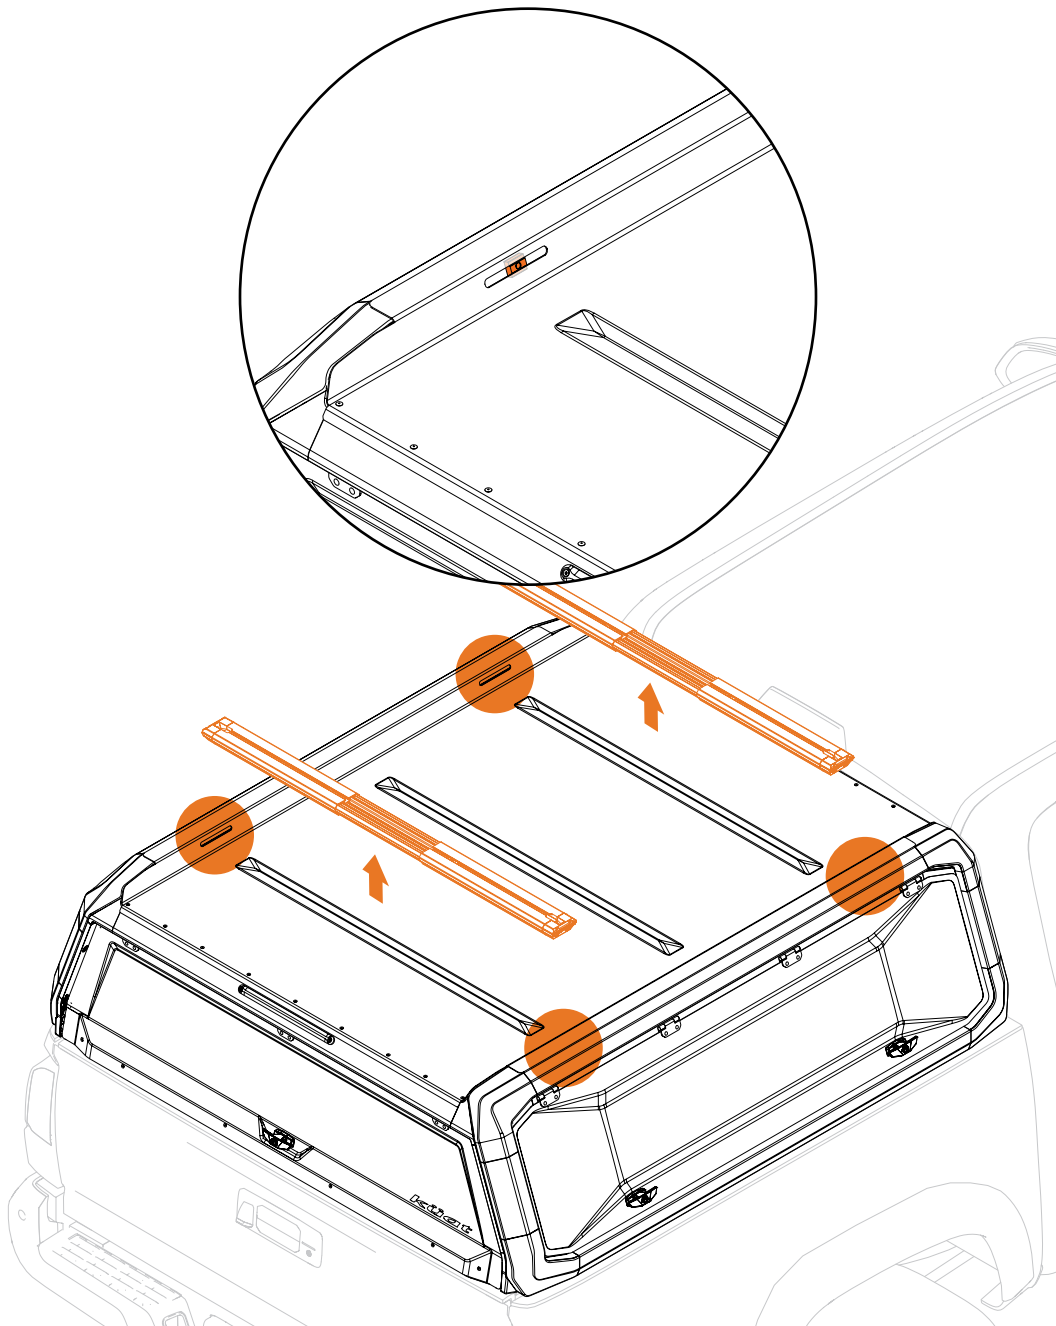

- 2 Install the Crossbar Riser Mount into the T-Nut using (1) M8 x 55 Bolt and (1) Washer.

Do not fully tighten. Repeat for the opposite side.

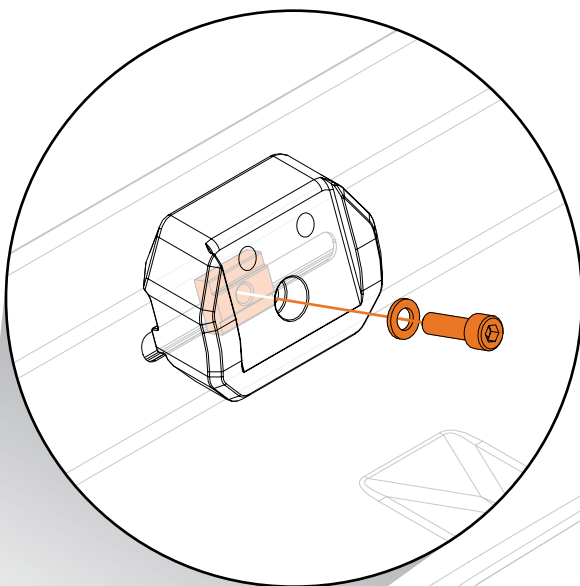


NOTICE


To aid in alignment, do not fully tighten

Crossbar Expansion


- 1 Determine the width of your vehicle and calculate the amount of desired crossbar overhang.

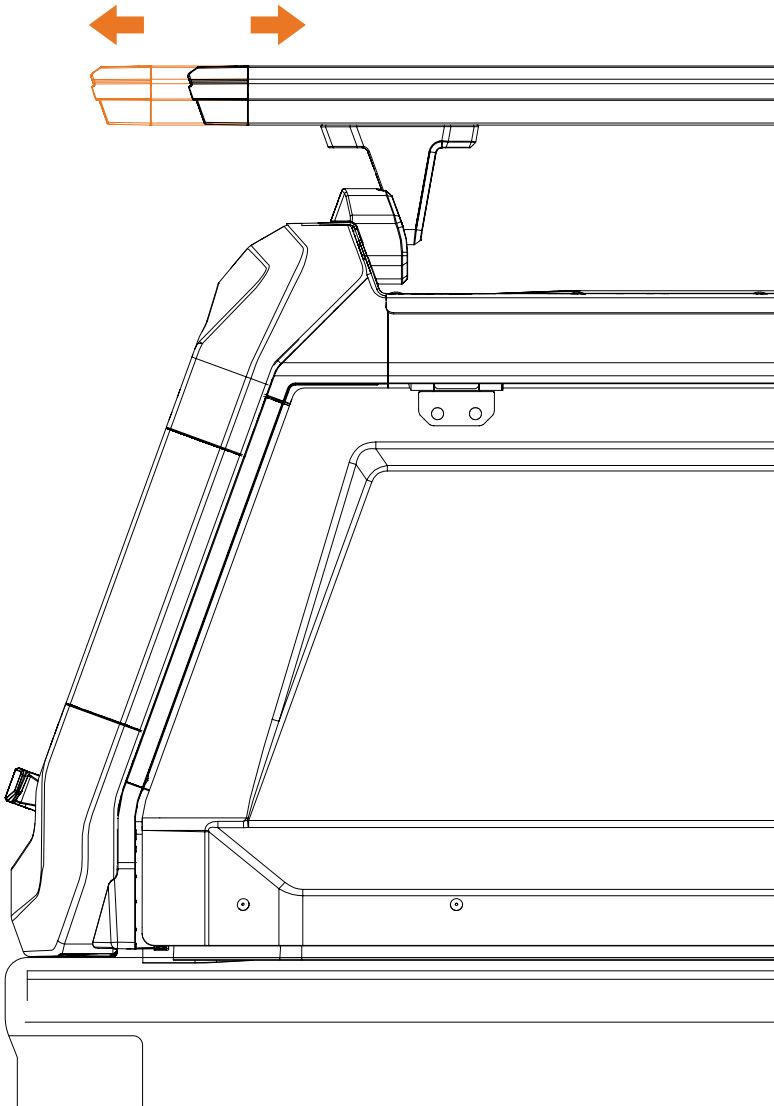

- 2 Loosen the orange-colored Crossbar Bolt.

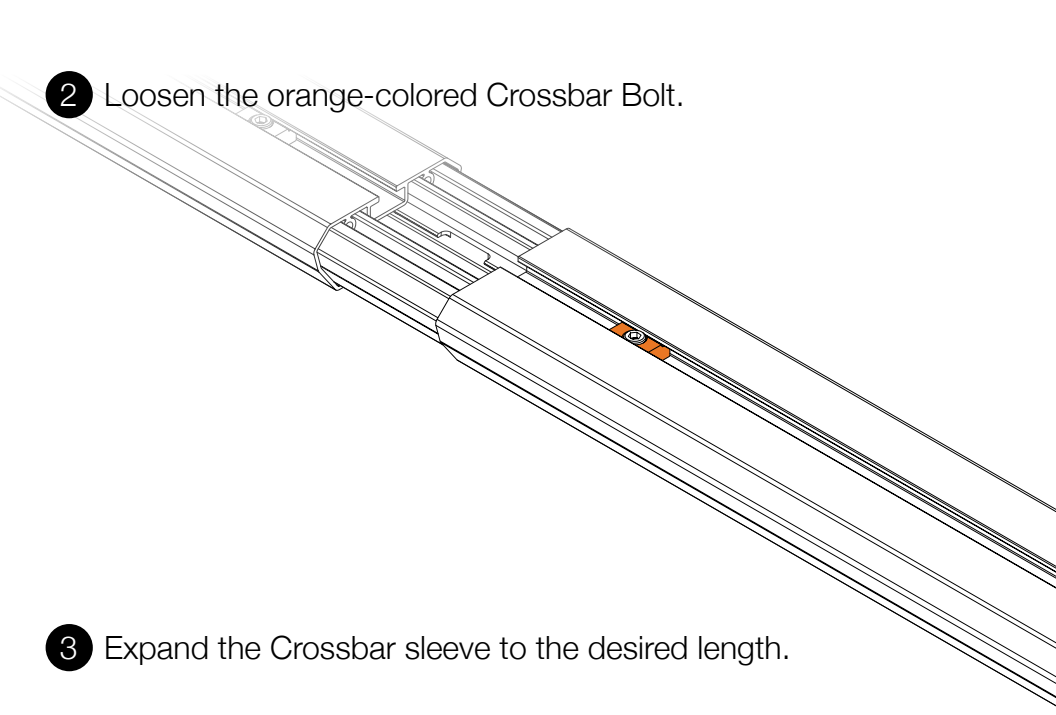

- 3 Expand the Crossbar sleeve to the desired length.

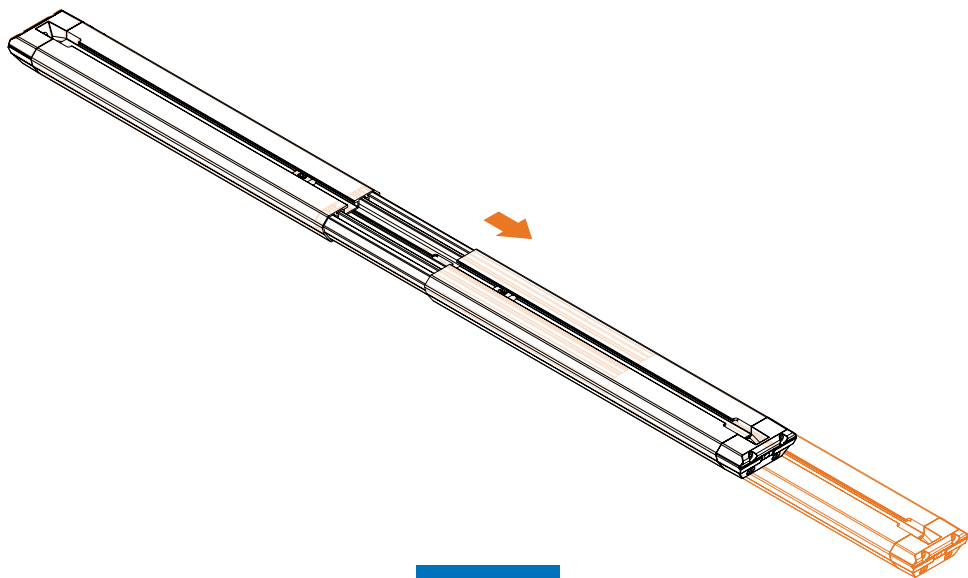


NOTICE


To aid in alignment, do not fully re-tighten orange bolt

Crossbar Installation

- 1 Place (2) T-Nuts into the left and right T-Channels of the Crossbar.

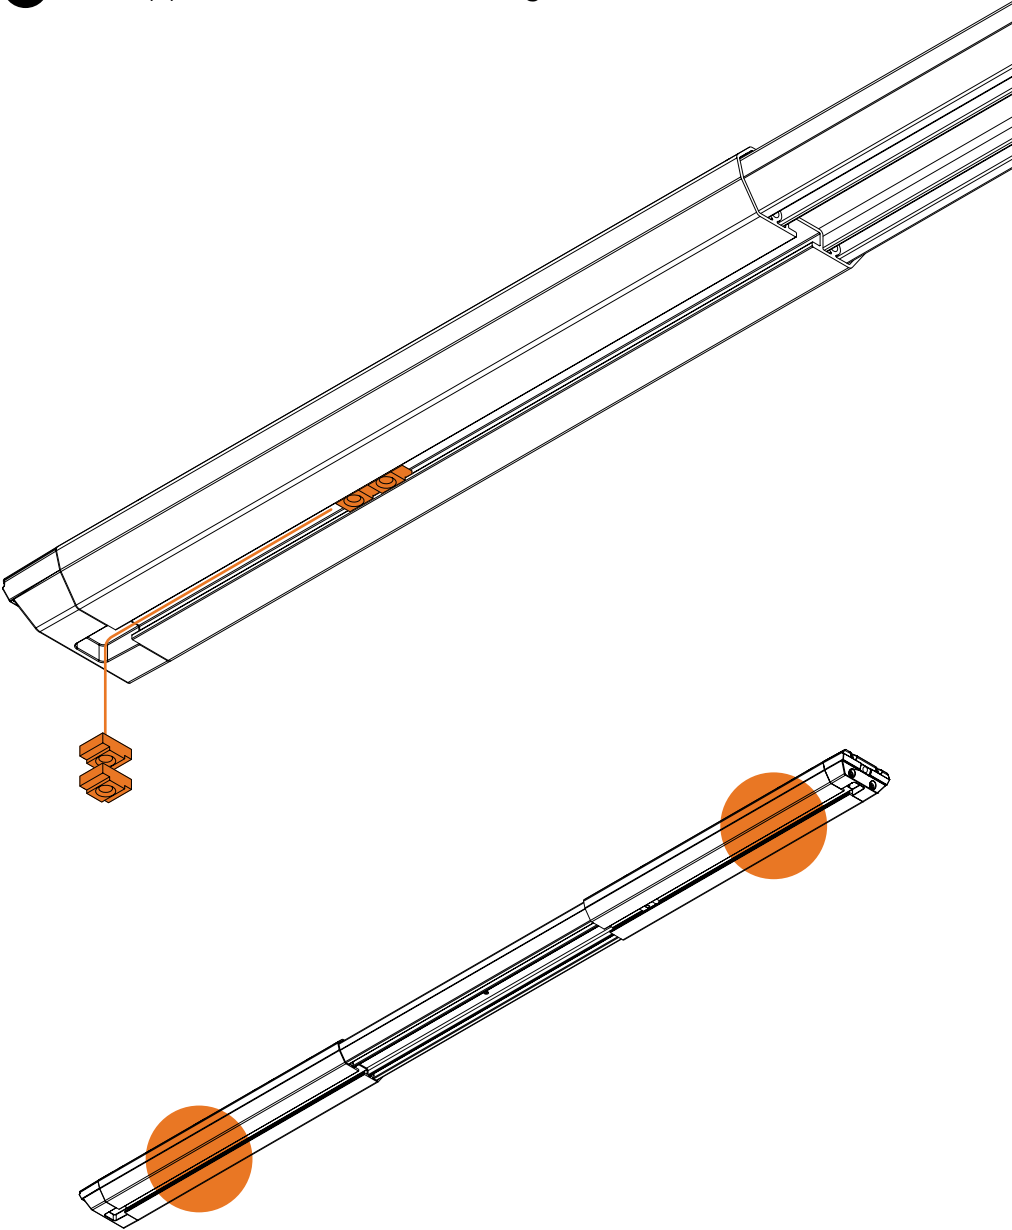


- 2 Align previously placed T-Nuts with Crossbar Riser Tower bolt holes. Install the Crossbar into the Crossbar Riser Tower using (2) M8 x 55 Bolts and (2) Washers. Repeat for the opposite side.

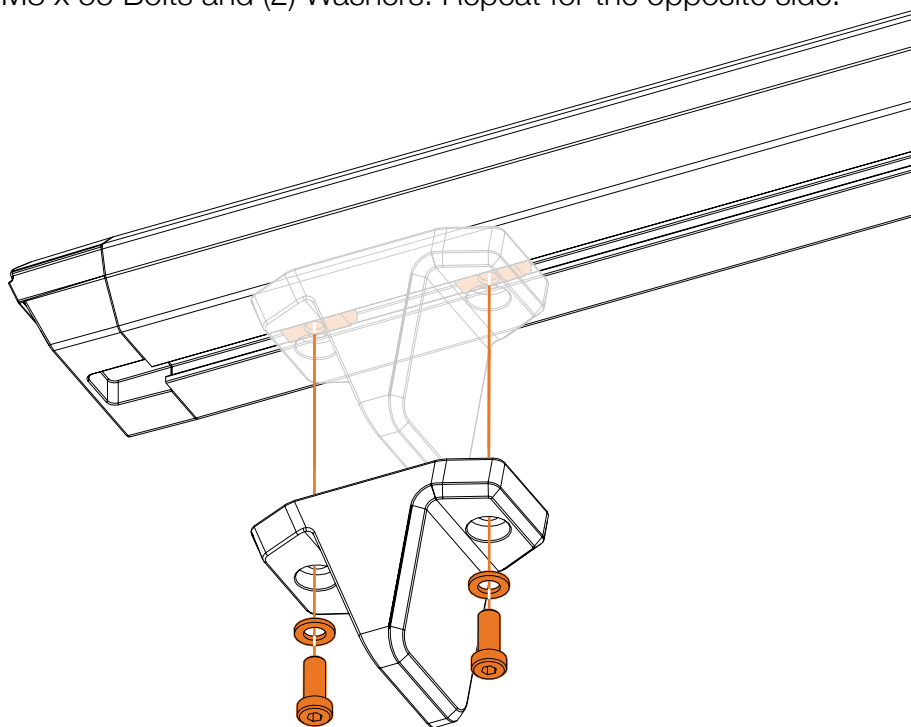


- 3 With left and right Crossbar Riser Towers installed, ensure both are equally spaced from Crossbar ends.

Fully tighten installed bolts.

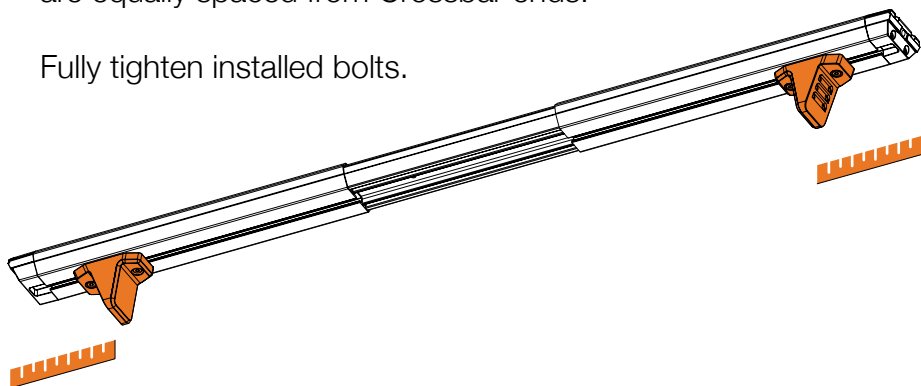


- 4 Choose the desired height on the Crossbar Riser Tower.

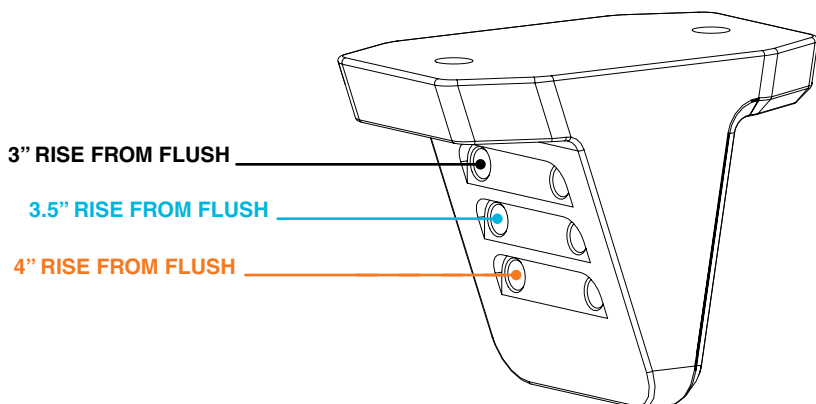


- 5 Install the Crossbar Riser Tower into the Crossbar Riser Mount using (2) M8 x 55 Bolts and (2) Washers.

Repeat for the opposite side.

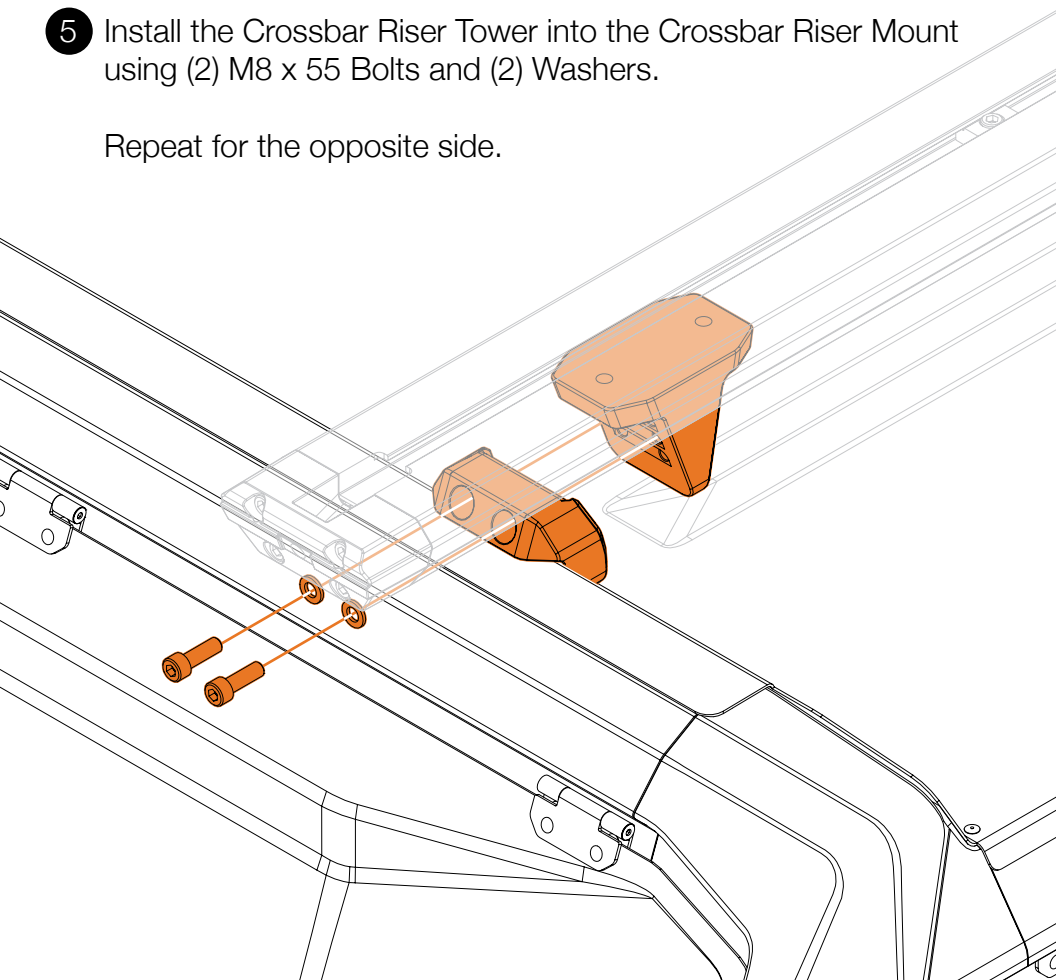

- 6 Installing the second Crossbar riser tower may require minor expansion or contraction of the overall Crossbar width.

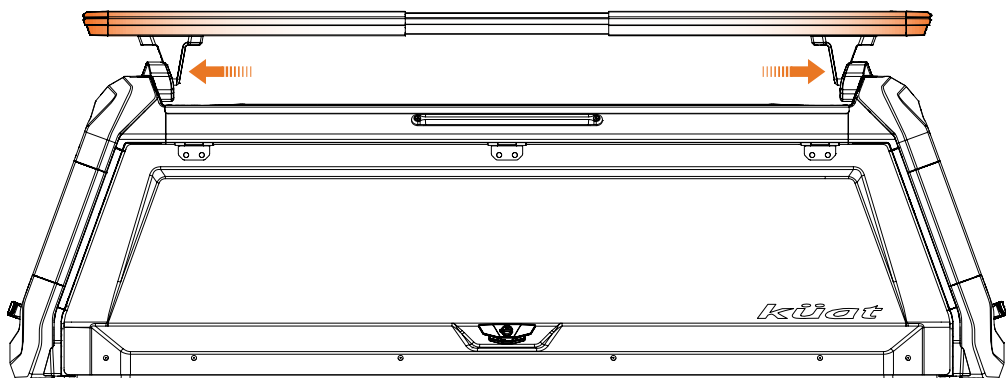

- 7 Once both Crossbar Riser Towers are installed and aligned, fully tighten orange-colored Crossbar bolt.
- 8 With both Crossbar Riser Towers assembled, ensure Crossbars are aligned left-to-right, and evenly spaced front-to-back.



After alignment, fully tighten all installed T-Nuts and bolts.

- 9 Repeat these steps for the second Crossbar.

NO WORRIES LIMITED WARRANTY

We stand behind our products, and our customer service reps are waiting to help you out if you have any problems with your product. Our limited warranty covers your purchase for life. You can review our limited warranty on our website or call customer service at the number below if you have questions or need a repair, replacement, refund, or a copy of the limited warranty.

www.kuat.com/warranty

Questions or comments?

Drop us an email or call us directly!

kuat.com | info@kuat.com | 877.822.5828

kuat[®]

1.877.822.5828

info@kuat.com

kuat.com