



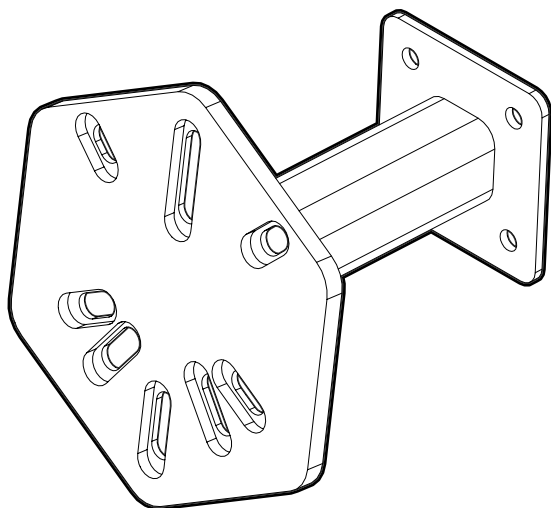

PIVOTXD™

SPARE TIRE ADAPTER

ASSEMBLY | USER GUIDE



ASSEMBLY VIDEO

Table of Contents

1	Introduction	3
	Safety Instructions	3
	RV Compatibility & Off-Road Use Warning	4
	Parts, Tools, Important Notes & Tips.....	5
2	Installation	6
	Spare Tire Adapter Installation	6
	Tire Mounting	7
4	No Worries Limited Warranty	8

SAFETY INSTRUCTIONS

PIVOTXD™ SPARE TIRE ADAPTER

⚠ WARNING

- Follow instructions for proper assembly, installation and use.
- Check tightness of all bolts and screws periodically.
- Make sure the Spare Tire Adapter, Pivot Rack, and vehicle receiver are in working condition before each use.
- Refer to the Safety Instructions of the Pivot used with this product and be sure to follow those guidelines to ensure proper function.
- Do not exceed a total weight capacity of 100 lbs on the Spare Tire Adapter.
- Modifying the panel by drilling or cutting may weaken the panel.
- Off-Road Use Warning: The Spare Tire Adapter is off-road rated for loads up to 100 lbs. Customers utilizing third-party accessories assume responsibility for confirming off-road compatibility directly with the accessory manufacturer for use with the Spare Tire Adapter.
 - The Spare Tire Adapter is designed for and intended to be used off-road on non-technical terrain, at slow speeds, with a weight capacity not to exceed 100 lbs.
 - It should not be used on rough, washed-out, boulder-and-rut-strewn roads, while rock crawling, jumping, bogging, or other technical driving conditions.
 - Smooth gravel roads are not considered off-road.
- Do not use tarps, rain covers or wind covers with this product.
- Do not exceed the weight rating of your vehicle's hitch receiver.
- Read the Limited Warranty for additional limitations on use with RV's and hitch extenders.

NOTICE

- Do not take through automatic car wash.

⚠ ADVERTENCIA

- Siga las instrucciones para el montaje, la instalación y el uso adecuados.
- Compruebe periódicamente que todos los pernos y tornillos estén bien apretados.
- Asegúrese de que el adaptador para rueda de repuesto, el soporte giratorio y el receptor del vehículo estén en buenas condiciones antes de cada uso.
- Consulte las instrucciones de seguridad del soporte Pivot que se utiliza con este producto y asegúrese de seguir esas pautas para garantizar un funcionamiento adecuado.
- No exceda una capacidad de peso total de 100 libras en el adaptador para rueda de repuesto.
- Modificar el panel perforándolo o cortándolo puede debilitarlo.
- Advertencia sobre uso fuera de carretera: El adaptador para rueda de repuesto está homologado para cargas de hasta 100 libras fuera de carretera. Los clientes que utilicen accesorios de terceros asumen la responsabilidad de confirmar la compatibilidad fuera de carretera directamente con el fabricante del accesorio para su uso con el adaptador para rueda de repuesto.
 - El adaptador para rueda de repuesto está diseñado y pensado para su uso fuera de carretera en terrenos no técnicos, a velocidades lentas y con una capacidad de peso que no supere los 100 libras.
 - No debe utilizarse en carreteras irregulares, erosionadas, llenas de rocas y baches, ni en condiciones de conducción técnica, como escalada de rocas, saltos, atolladeros u otras.
 - Las carreteras de grava lisa no se consideran fuera de carretera.
- No utilice lonas, cubiertas para la lluvia o cubiertas para el viento con este producto.
- No exceda la capacidad de peso del enganche de remolque de su vehículo.
- Lea la garantía limitada para conocer las limitaciones adicionales de uso con vehículos recreativos y extensiones de enganche.

AVISO

- No lo lleve a lavaderos de coches automáticos.

⚠ AVERTISSEMENT

- Suivez les instructions pour un assemblage, une installation et une utilisation corrects.
- Vérifiez régulièrement le serrage de tous les boulons et vis.
- Assurez-vous que l'adaptateur pour roue de secours, le support pivotant et le récepteur du véhicule sont en bon état de fonctionnement avant chaque utilisation.
- Reportez-vous aux consignes de sécurité du pivot utilisé avec ce produit et veillez à suivre ces directives pour garantir un fonctionnement correct.
- Ne dépassez pas la capacité de charge totale de 100 lb sur l'adaptateur pour roue de secours.
- Modifier le panneau en le perçant ou en le coupant peut l'affaiblir.
- Avertissement concernant l'utilisation hors route : l'adaptateur pour roue de secours est homologué pour une charge maximale de 100 lb hors route. Les clients qui utilisent des accessoires tiers ont la responsabilité de vérifier directement auprès du fabricant de l'accessoire que celui-ci est compatible avec l'adaptateur pour roue de secours en vue d'une utilisation hors route.
 - L'adaptateur pour roue de secours est conçu et destiné à être utilisé hors route sur des terrains non techniques, à faible vitesse, avec une capacité de charge ne dépassant pas 100 lb.
 - Il ne doit pas être utilisé sur des routes accidentées, délavées, jonchées de rochers et d'ornières, ni lors de la conduite sur des rochers, de sauts, de boursiers ou dans d'autres conditions de conduite techniques.
 - Les routes de gravier lisses ne sont pas considérées comme hors route.
- N'utilisez pas de bâches, de housses de pluie ou de housses anti-vent avec ce produit.
- Ne dépassez pas la capacité de charge de l'attelage de votre véhicule.
- Lisez la garantie limitée pour connaître les restrictions supplémentaires relatives à l'utilisation avec les camping-cars et les rallonges d'attelage.

AVIS

- Ne passez pas dans un lavage automatique.

Küat RV Compatibility Warning

Küat's limited warranty only covers the use of some of its receiver hitch-mounted bicycle racks with some recreational vehicles (RVs), as described below. Many types of RVs subject the rack and bicycles on it to high forces and extreme movements. Damage resulting from the use of a Küat product in violation of this section is not covered by this limited warranty.

Küat's limited warranty will cover use of any of its 2-inch receiver hitch-mounted bicycle racks on Class B type motorhomes, commonly known as van conversions (as defined in 49 C.F.R. 571.3), satisfying all of the following requirements:

The receiver hitch is directly attached to the motorhome chassis, not just to the bumper;

The rear-most point of the receiver hitch, where the bicycle rack will be attached, is no more than 64 inches from the rear axle of the motorhome; and

The vehicle is a class B type motorhome as described below.

Class B type motorhomes are commonly known as van conversions and comprise a completed van-type vehicle that has been altered to provide temporary living quarters. Class B type motorhomes have a gross vehicle weight rating of 10,000 lbs or less.

In addition, (i) the 2-inch receiver Transfer™ v2, (ii) the 2-inch receiver Piston ION, (iii) the 2-inch receiver Piston Pro X, (iv) the 2-inch receiver Piston Pro, and (v) the Piston SR with 2" Hitch Adapter may be used on RVs (both motorhomes and trailers) satisfying all of the following requirements:

The receiver hitch is directly attached to the RV chassis, not just to the bumper;

No hitch extender or swing-away rack attachment is being used; and

The bike rack is in its original configuration, with no add-on rack attachments.

Please check the product User Guide for load weight limits applicable to your rack when used on an RV. Lower weight limits apply.

Even if the conditions above are met, any RV may be operated in a way that will expose Küat's products to conditions that they are not designed to handle. The RV operator is responsible for operating the RV in a manner that will not overload the rack, such as by excessive speed over rough roads or speed bumps, rapid turning movements, driving the RV over changes in gradient that will bring the rack in contact with the ground, or other similar actions.

Küat Off-Road Use Warning

Küat's limited warranty only covers the use of some of its products when used off-road, as described below. Many off-road situations subject the product, bicycles, and gear on it to high forces and extreme movements. Damage resulting from the use of a Küat product in violation of this section is not covered by this limited warranty.


Küat's limited warranty will cover use of the (i) IBEX Truck Bed Rack, (ii) all IBEX Truck Bed Rack Accessories, (iii) the IBEX Panel Kit, (iv), the DEK Roof Platform, (v) the 2-inch receiver Piston ION, (vi) the Pivot XD, (vii) Pivot XD Accessory Molle Hoop, and (viii) Pivot XD Spare Tire Adapter when used off-road as described below under the following conditions:

The product is used on non-technical terrain and does not require aftermarket upgrades to your 4WD suspension; and usage does not include rock-crawling, jumping, bogging, or driving on washed-out, boulder-and-rut-strewn, or other technical conditions; and The Pivot XD is not used with any Küat bike racks, regardless of any individual rack off-road ratings; and the Piston ION is mounted to dedicated 2" hitch receivers and not used with any hitch extender, hitch adapter, or swing-away product; and the product is driven at a moderate speed. Smooth gravel roads are not considered off-road.

Always check the product User Guide for load distribution instructions and weight limits applicable to your rack when used off-road. Lower weight limits apply.

Even if the conditions above are met, a product can be used in a way that will expose it to situations it is not designed to handle. The vehicle operator is responsible for being an experienced off-road driver and should operate the vehicle in a manner that will not overload the rack. The vehicle operator should also consider total load distribution when encountering rutted and/or rocky terrain, and must reduce the load, speed, or both, as necessary.


Parts



(1) Spare Tire Adapter



(4) M10 x 30 Bolts



(3) M12 x 75 Bolts



(3) Open Lug Nuts 2" LG



(4) M10 Nuts



(4) 10mm Washers




(3) M12 Hex Jam Nuts




(3) 12mm Washers

Tools




(1) 17mm Stamped Wrench



(1) 21mm Stamped Wrench



(1) 8mm Hex Key




(1) 10mm Hex Key

The Spare Tire Adapter mounts directly to Kuat's Accessory Molle Hoop, and is required for use of this product.


Assembly

- 1 Install Spare Tire Adapter into Molle Hoop using (4) Bolts, (4) Nuts and (8) Washers.

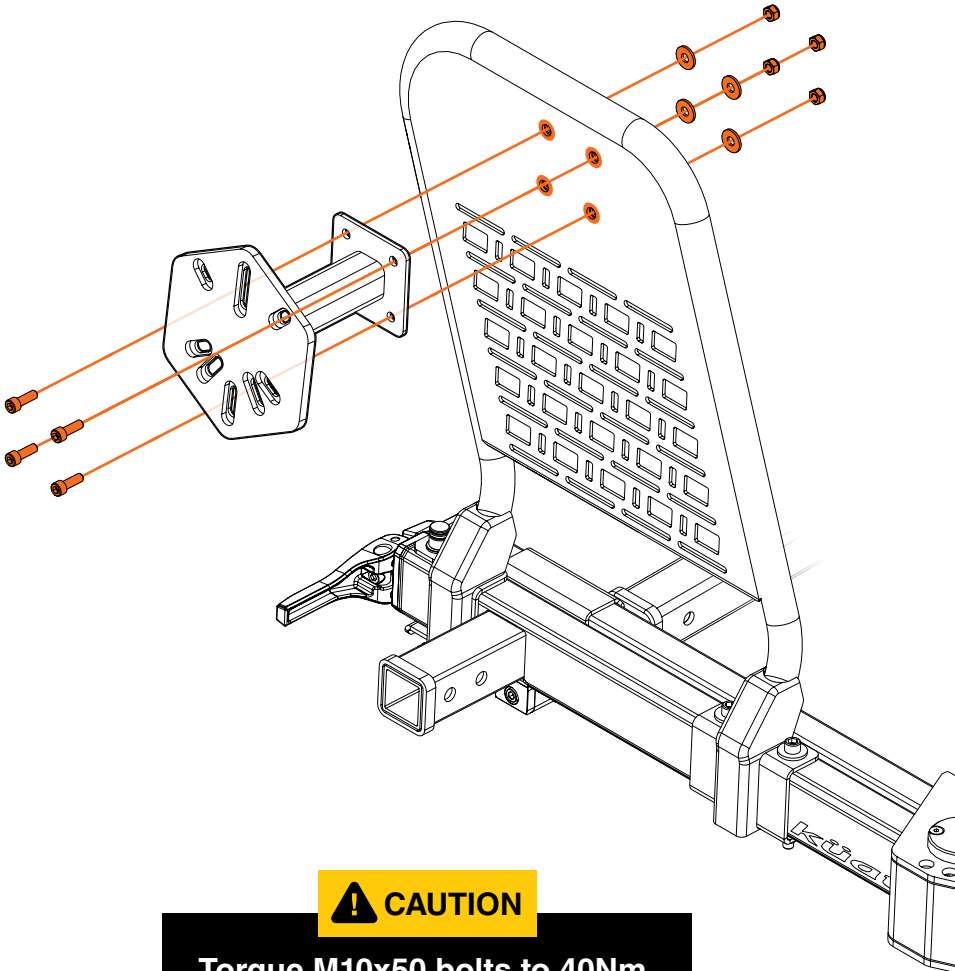

Tire Mounting

- 1 Place tire onto Spare Tire Adapter mounting plate and secure with (3) Acorn Nuts, (3) Nuts, (3) Washers, and (3) Bolts.

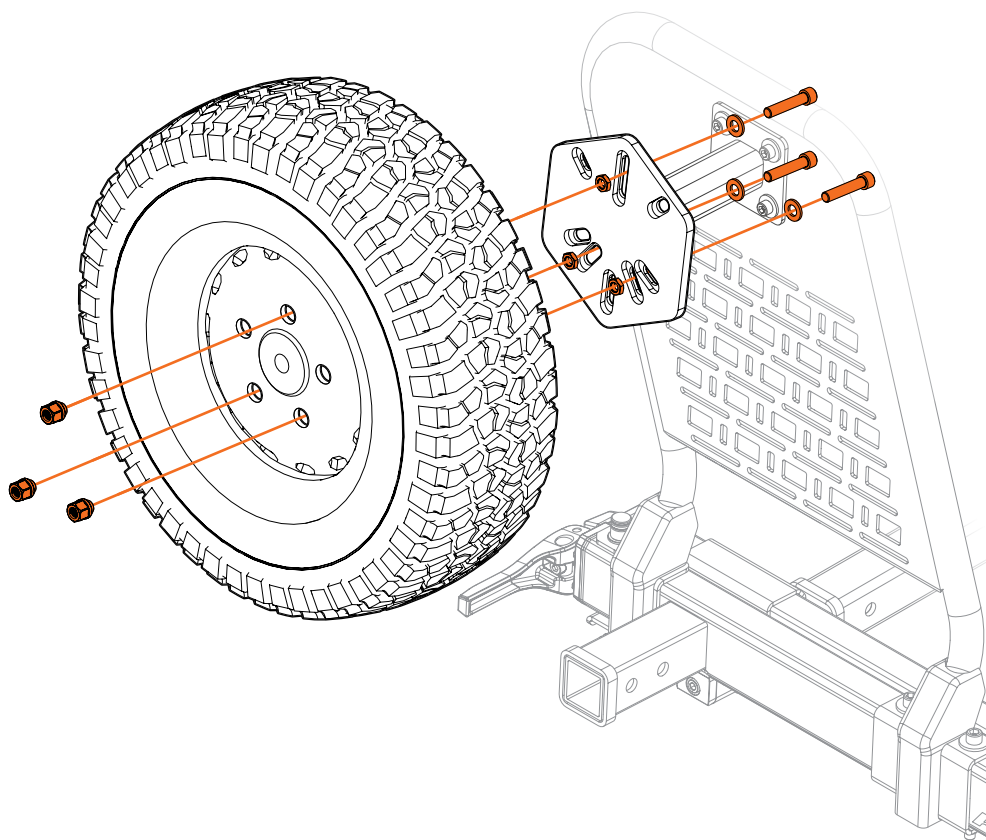

CAUTION

Torque M10x50 bolts to 40Nm.

LIMITED WARRANTY

We stand behind our products, and our customer service reps are waiting to help you out if you have any problems with your product. Our limited warranty covers your purchase for life. You can review our limited warranty on our website or call customer service at the number below if you have questions or need a repair, replacement, refund, or a copy of the limited warranty.

www.kuat.com/warranty

Questions or comments?

Drop us an email or call us directly!

kuat.com | kuat.com/contact | 877.822.5828

kuat[®]