


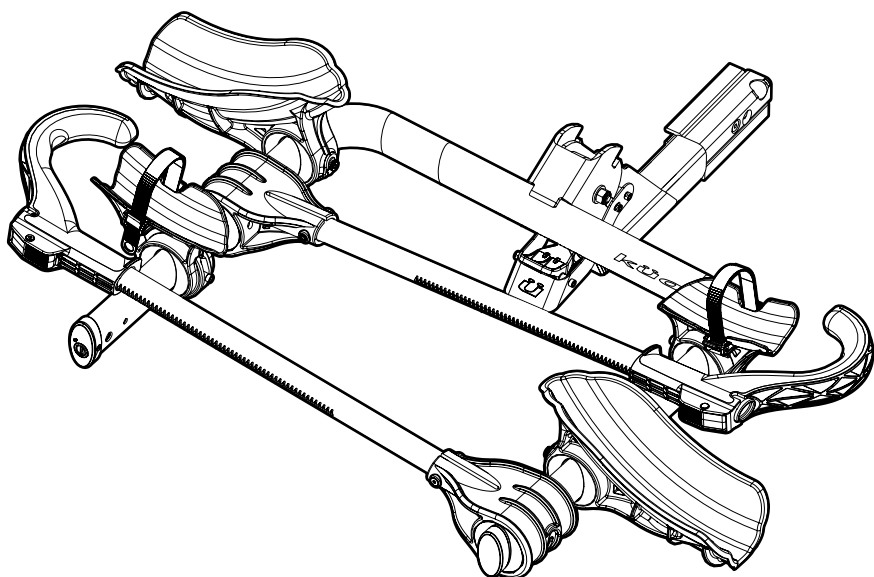


TRANSFER™ v2


TWO BIKE

1.25" / 2"


INSTALLATION




Parts



- (1) Pivot Bolt Assembly
 - Pivot Bolt
 - Pivot Nut
 - M16 Washer
 - M12 Washer




- (2) Locator Bolt



- (2) M6 x 85



- (2) Spacer



- (2) M6 x 90




- (4) M6 x 60 Flathead



- (4) M6 Nut



- (4) M6 x 65



- (2) Tire Hook



- (2) Arm Knuckle



- (1) Locking &
 (1) Non-Locking
 Endcaps



- (2) M4 x 12



- (2) Plates



- (1) Hitch Pin




- (2) Tire Hook Arm




- (2) Tire Strap




- (1) Cotter Pin




- (2) Front Tire Cradle



- (2) Rear Tire Cradle



- (2) Arm Puck




- (1) Hitch Shank Assembly




- (2) Lock Keys

Tools



19mm Flat Wrench




8mm Security Allen Key



2.5mm Allen Key



4mm Allen Key




5mm Allen Key



IMPORTANT


When loading a bicycle, ensure tire hook is placed as close to the bicycle fork as possible.

Placing the tire hook further away increases the risk of bicycle becoming unsecured in the rack, which may result in falling and damage.

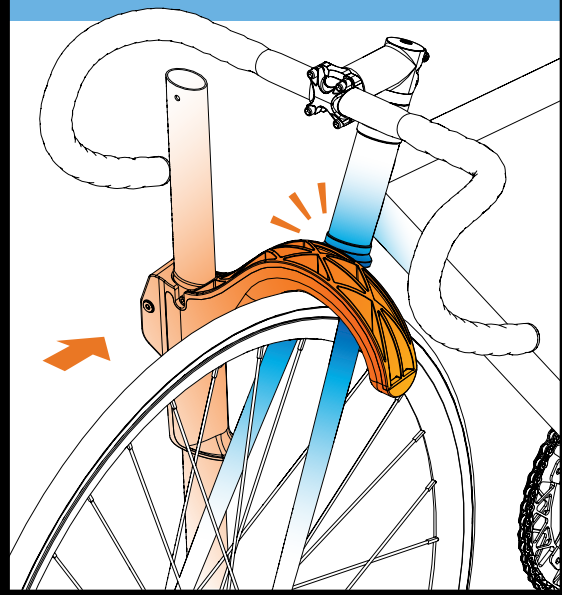


Assembly


- 1 Slide **Front Tire Cradle** into position.

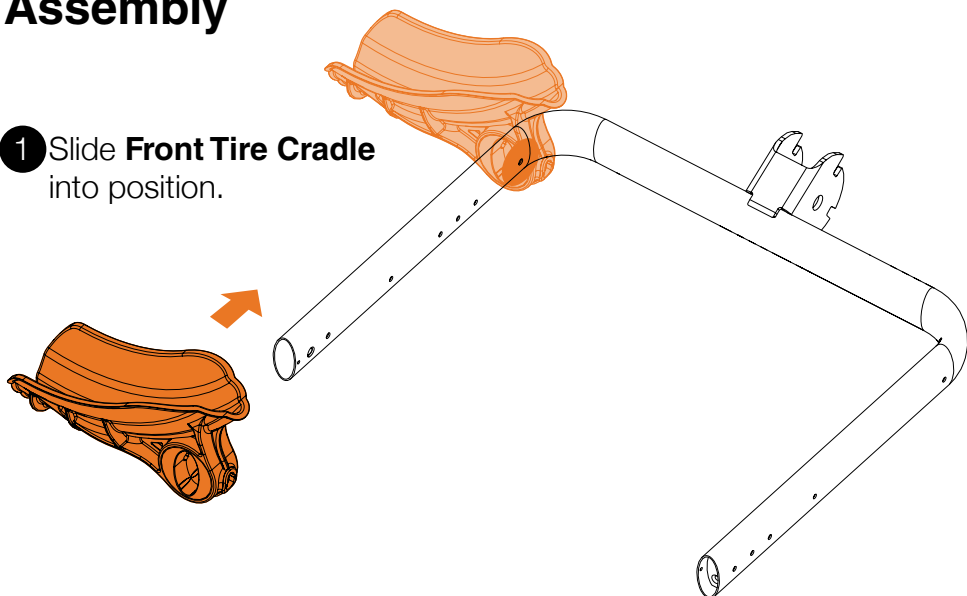


- 2 Install **Locator Bolt** in Position A as shown.

Check out Page 16 for locator tab functionality.

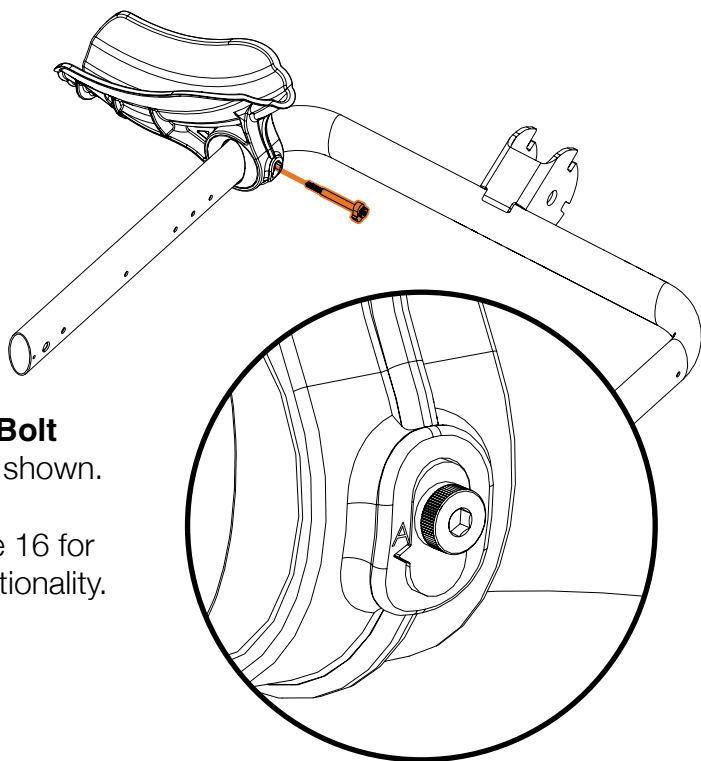


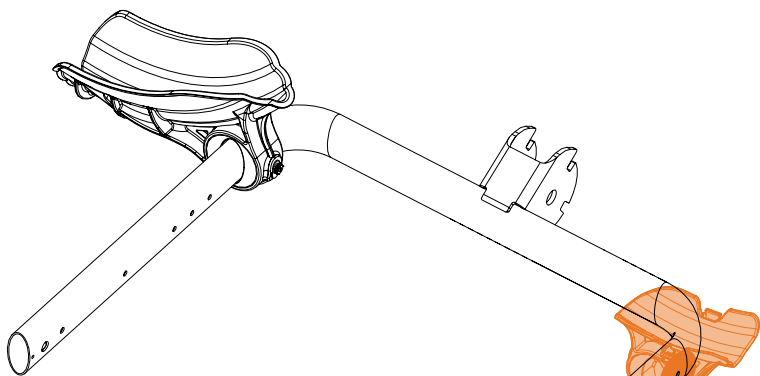


- 3 Slide **Rear Tire Cradle** into position.




- 4 Secure **Rear Tire Cradle** with **M6 x 85** and **Spacer**.

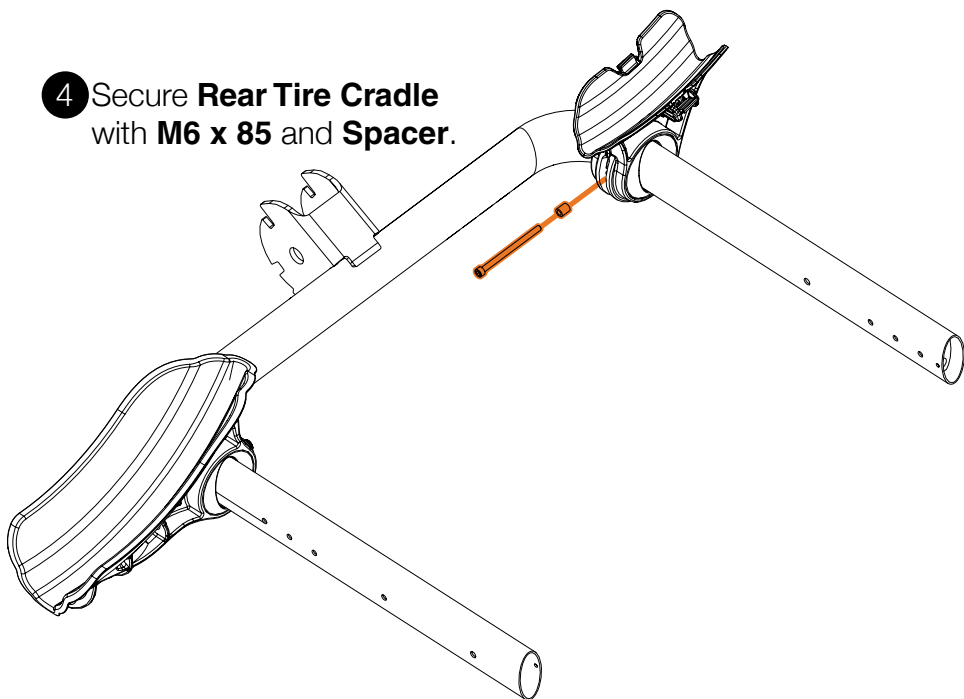

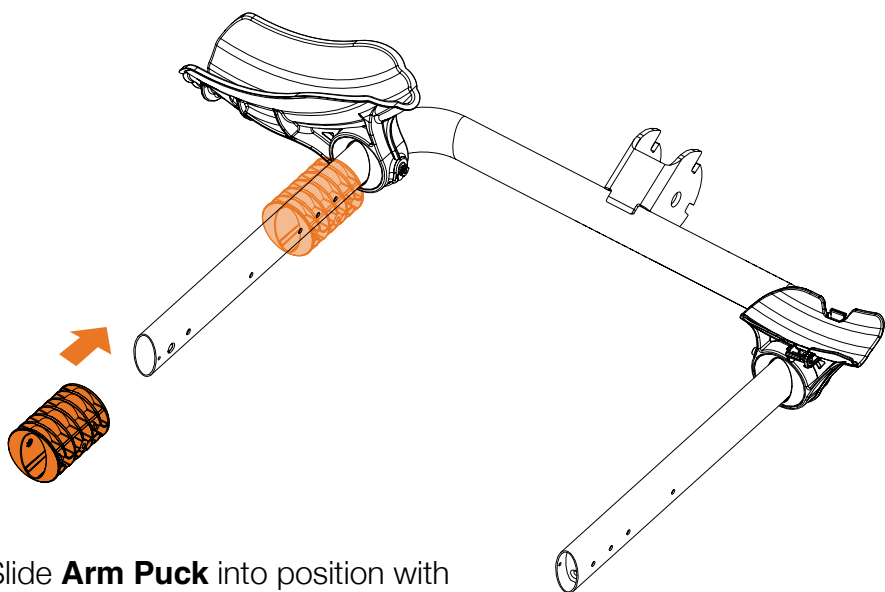


- 5 Slide **Arm Puck** into position with pre-installed nuts facing outward.

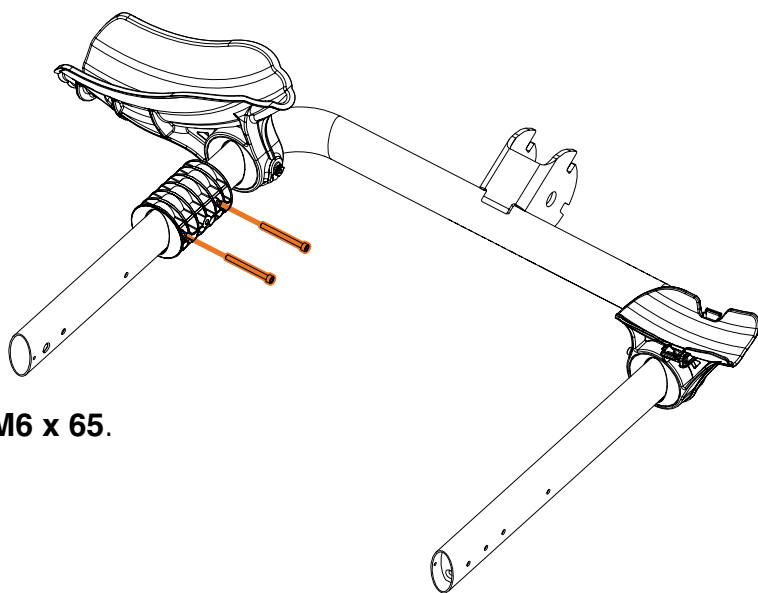

- 6 Install (2) **M6 x 65**.


Inner Tire Hook Arm Assembly

- 7 Push button on handle and slide **Tire Hook** up the **Tire Hook Arm** from the bottom.

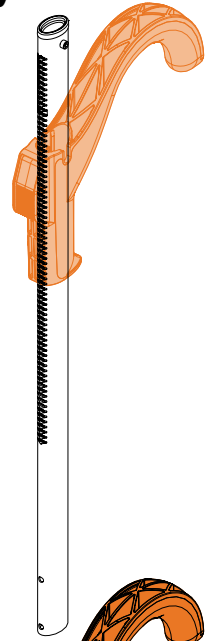


! Inner Tire Hook Arm Assembly will use Arm without a Küat logo.


- 8 Insert arm into **Arm Knuckle**.

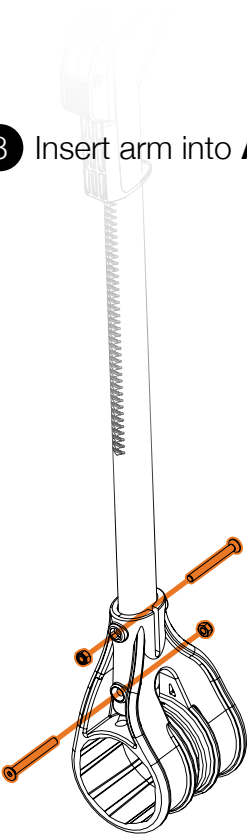



- 9 Install (2) **M6 x 60 Flathead bolts** and (2) **M6 nuts**.




Inner Arm Installation

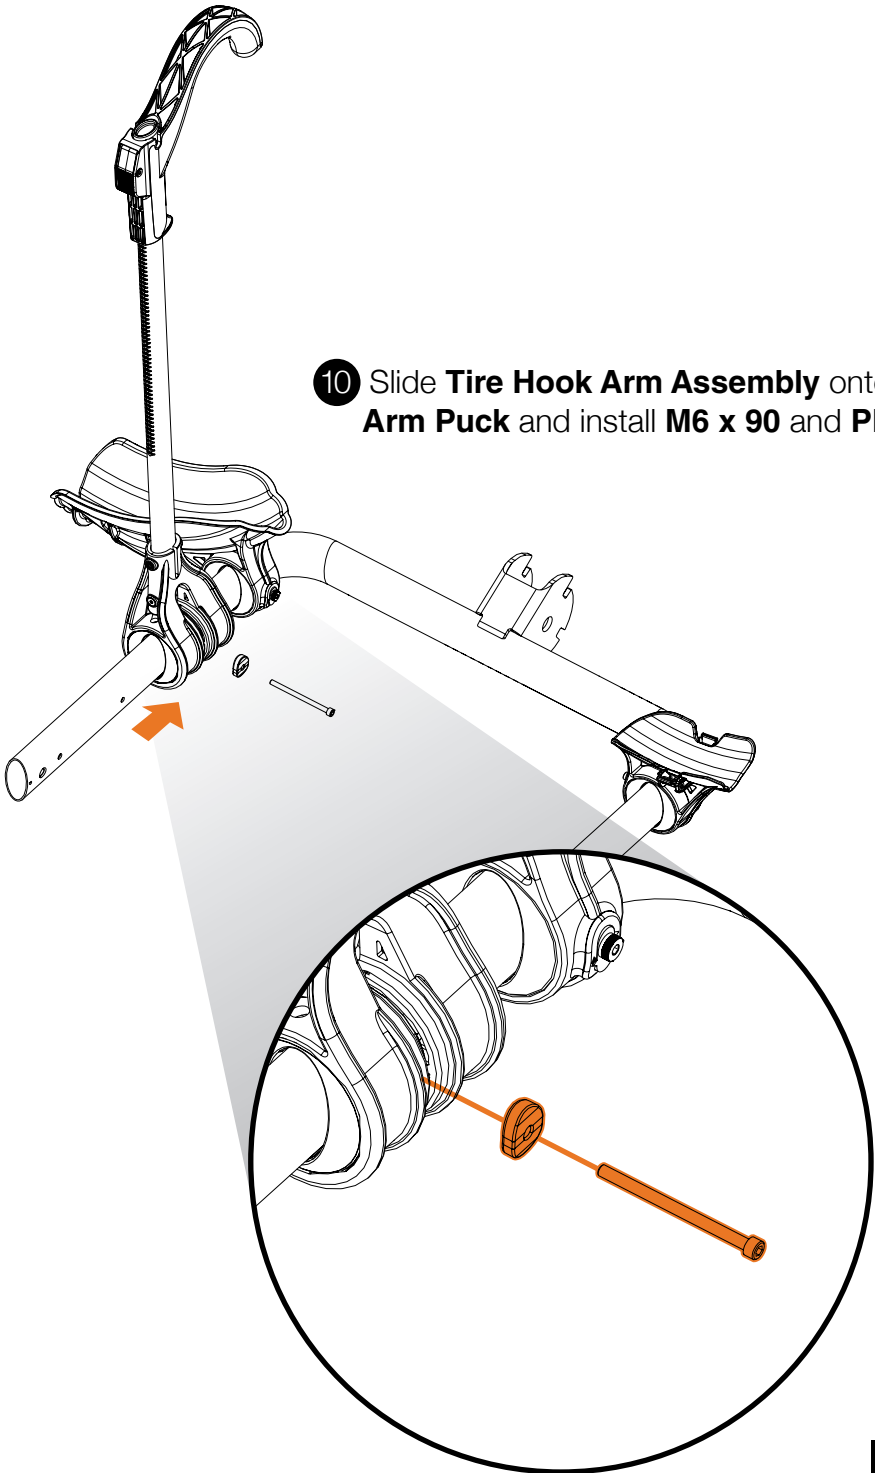


11 Slide **Front Tire Cradle** into position.

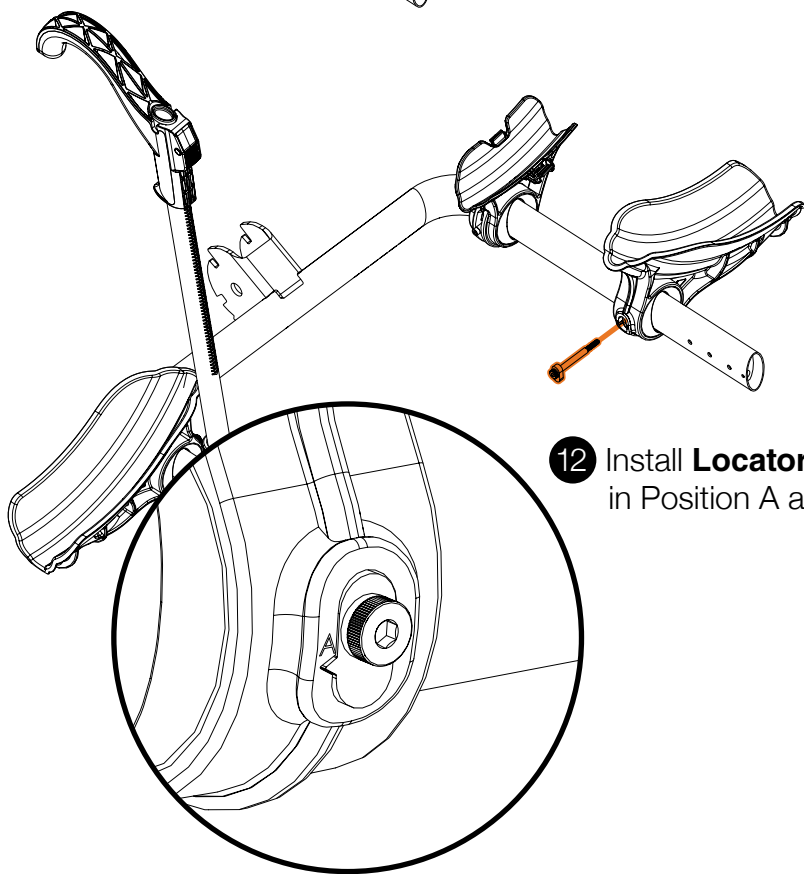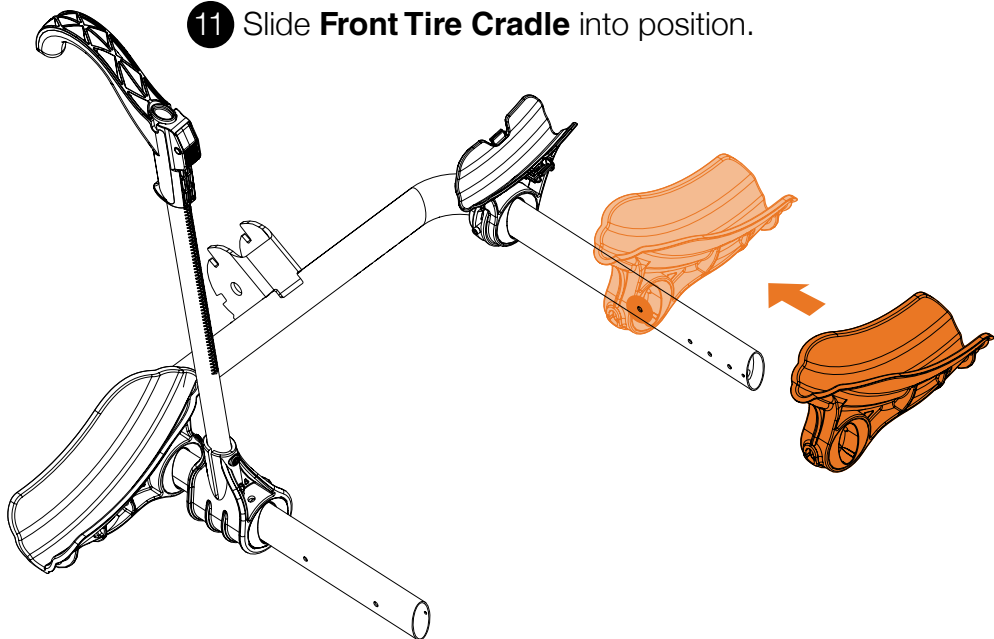

12 Install **Locator Bolt**
in Position A as shown.


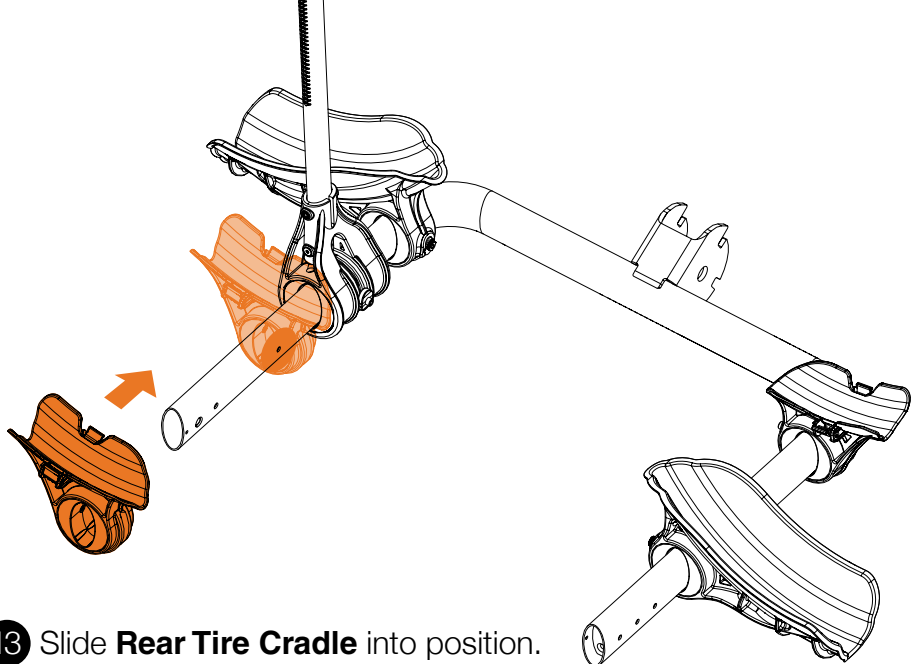


- 13 Slide **Rear Tire Cradle** into position.

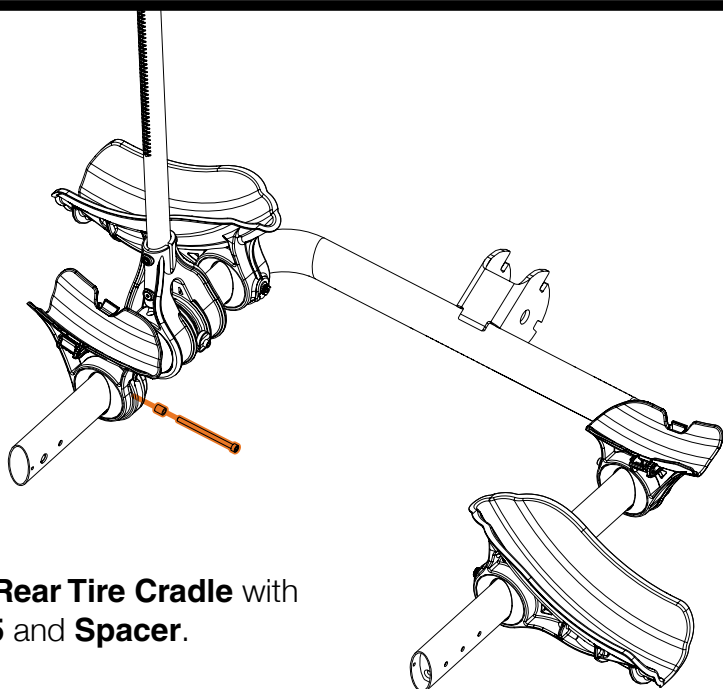

- 14 Secure **Rear Tire Cradle** with **M6 x 85** and **Spacer**.


- 15 Slide **Arm Puck** into position with pre-installed nuts facing outward.

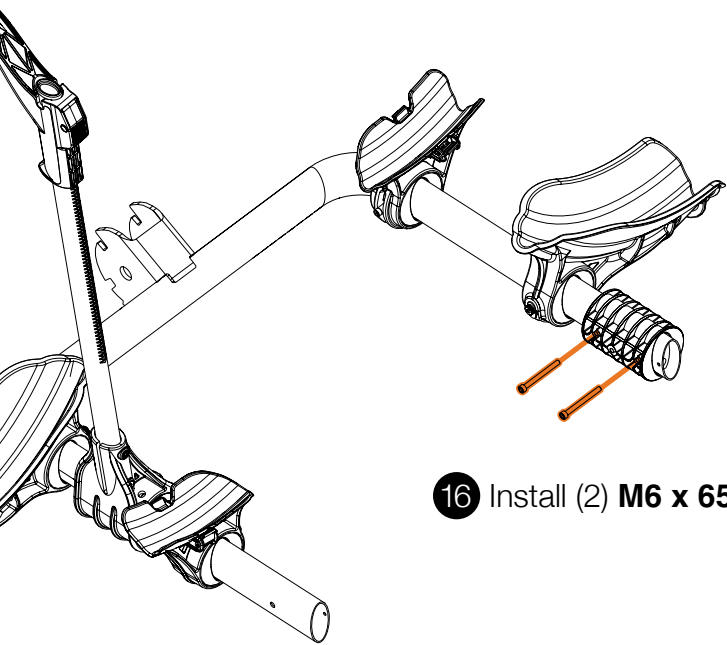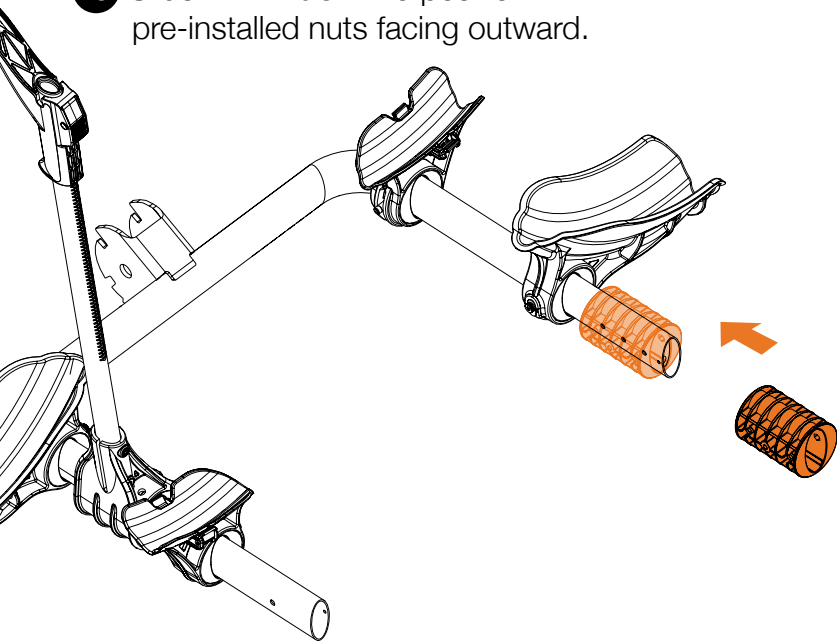

- 16 Install (2) **M6 x 65 bolts**.

Outer Tire Hook Arm Assembly


- 17 Push button on handle and slide **Tire Hook** up the **Tire Hook Arm** from the bottom.

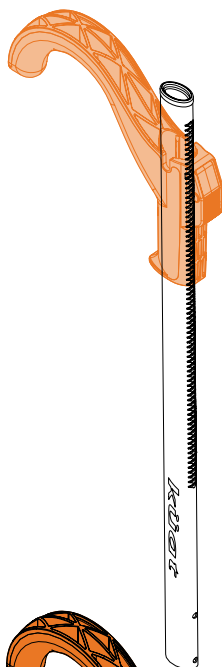

- ! Outer Tire Hook Arm Assembly will use Arm displaying the white Küat logo.




- 18 Insert arm into **Arm Knuckle**.

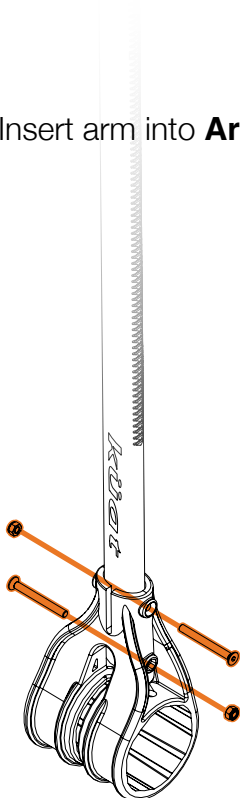


- 19 Install (2) **M6 x 60 Flathead bolts** and (2) **M6 nuts**.

Outer Arm Installation


- 20** Slide **Tire Hook Arm Assembly** onto **Arm Puck** and install **M6 x 90** and **Plate**.

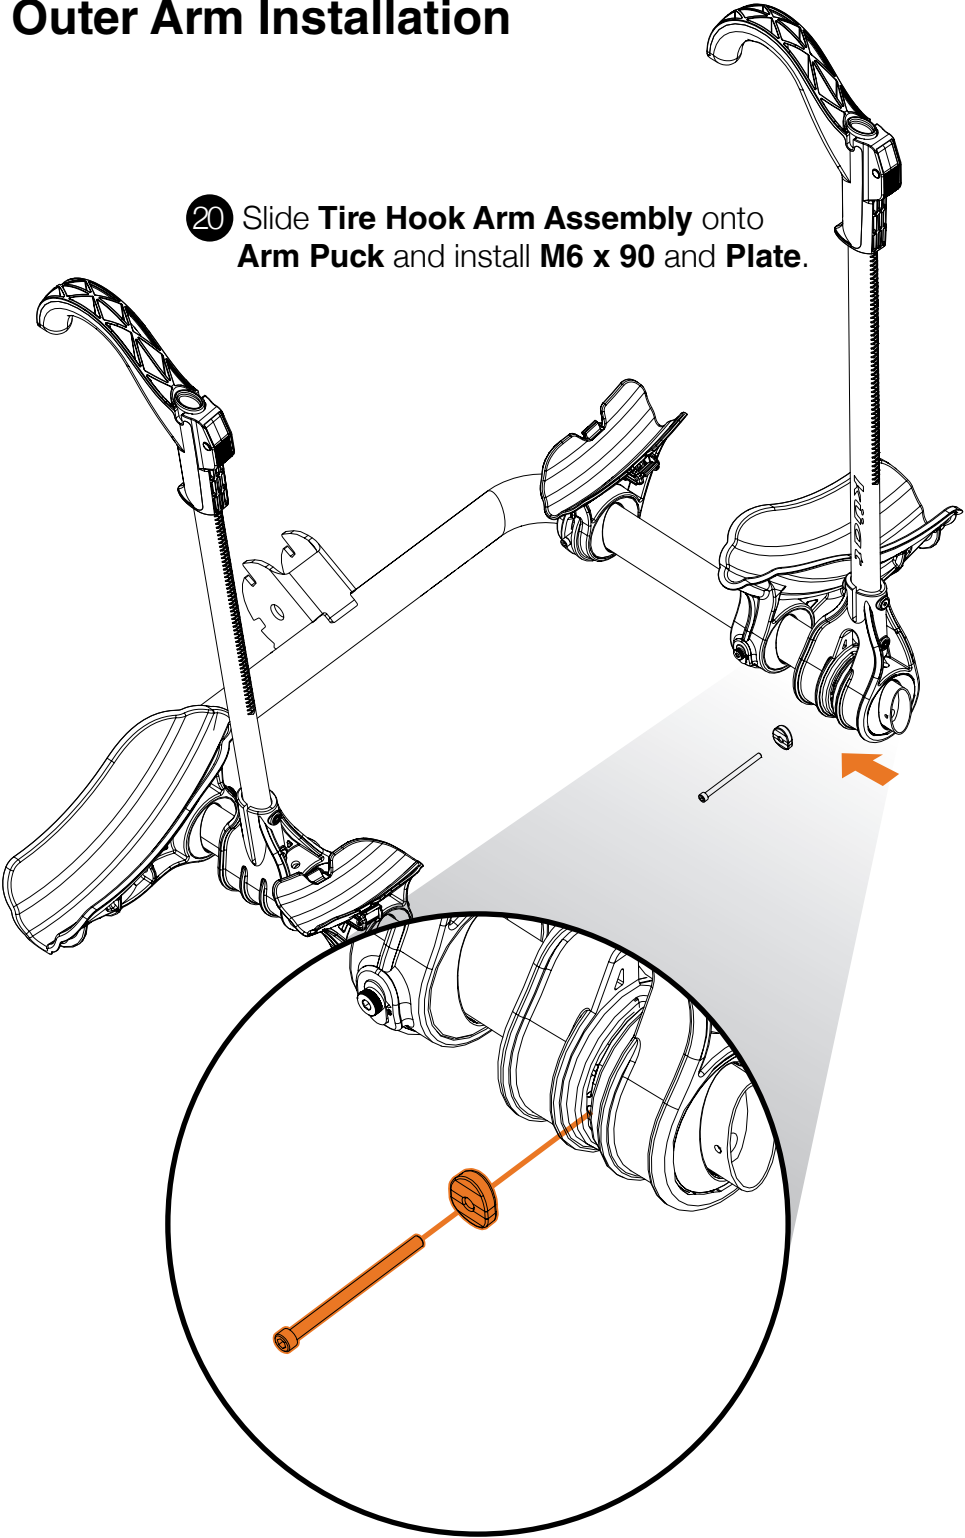

Endcap Installation

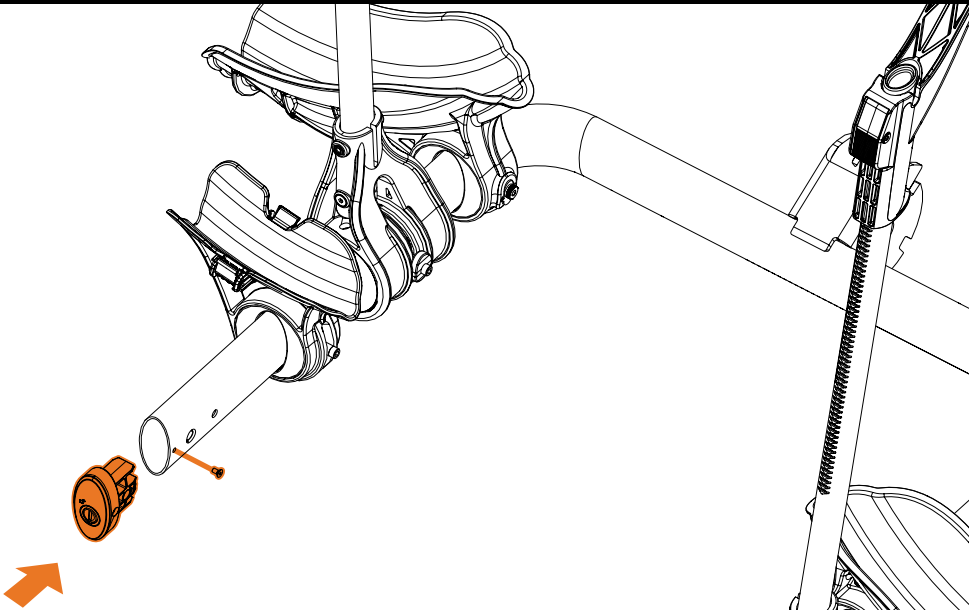


- 21 Install **Locking Endcap** into the driver-side tray with **M4x12 Flathead**.

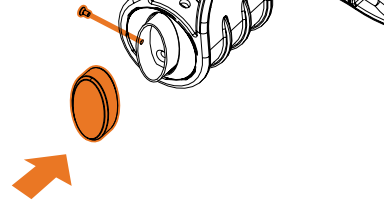

- 22 Install **Non-Locking Endcap** into the passenger-side tray with **M4x12 Flathead**.

Hitch Shank Assembly

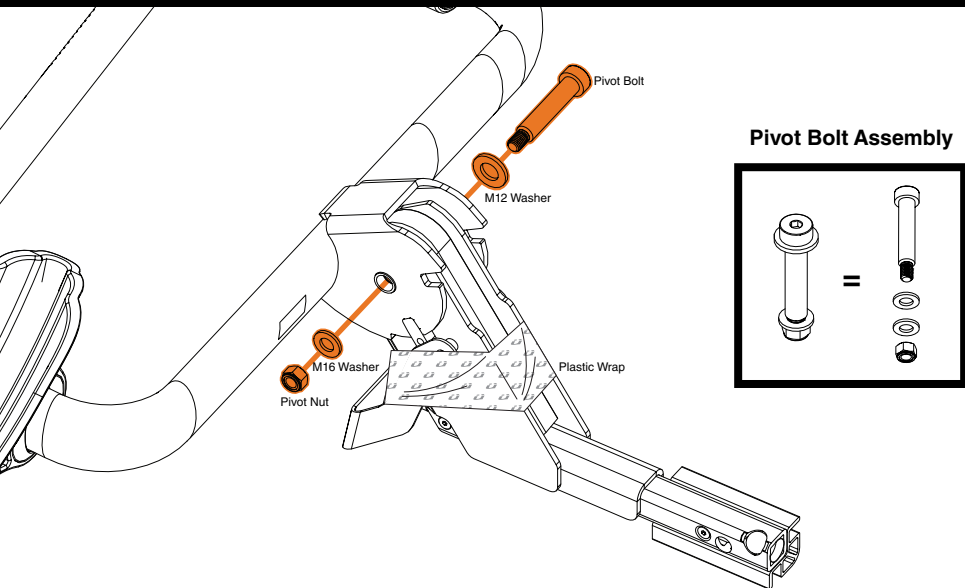


- 13 Install **Hitch Shank Assembly** into the rear of bike tray using the provided **Pivot Bolt**, **Pivot Washers**, and **Pivot Nut**.

! After assembling hitch shank, remove clear plastic wrap to engage foot pivot tension.

Tire Strap Installation


- 14 Thread **Tire Strap** through both ratchets. Open side should face endcaps.

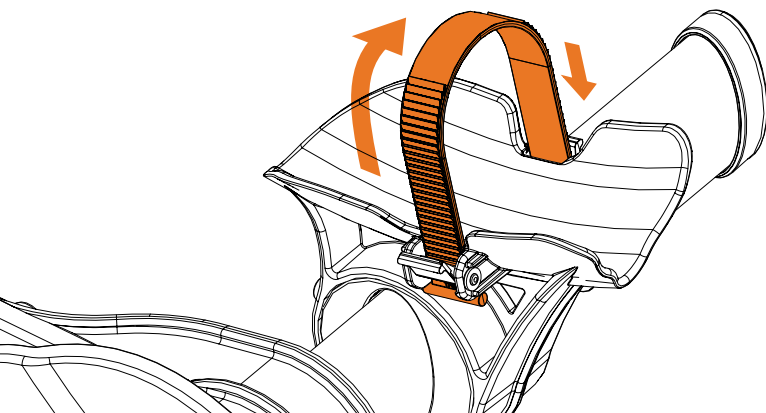

Vehicle Installation

- 15 Insert rack into hitch, being sure to align hitch pin holes.

- 16 Insert **Hitch Pin**, secure with **Cotter Pin**.

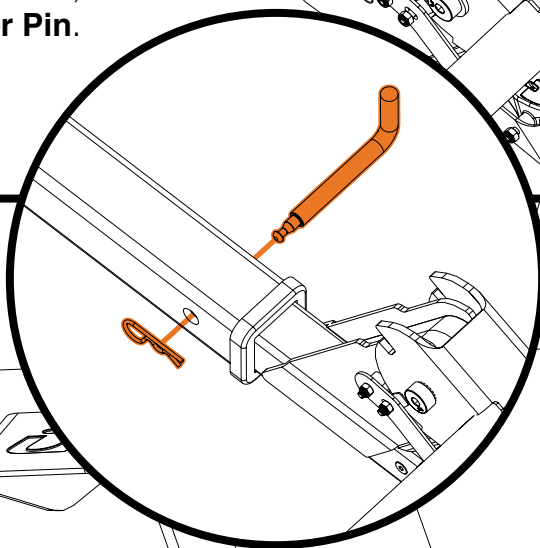

- 17 Secure Transfer in hitch by tightening the flatlock hitch cam using your provided **8mm Security Allen Wrench**.




KEEP THE 8mm SECURITY ALLEN IN A SAFE, CONVENIENT LOCATION.

Loading a Bicycle

! BEFORE LOADING A BICYCLE, CHECK:


- The rack is secured to the hitch.
- The pivot lever is fully engaged in position.

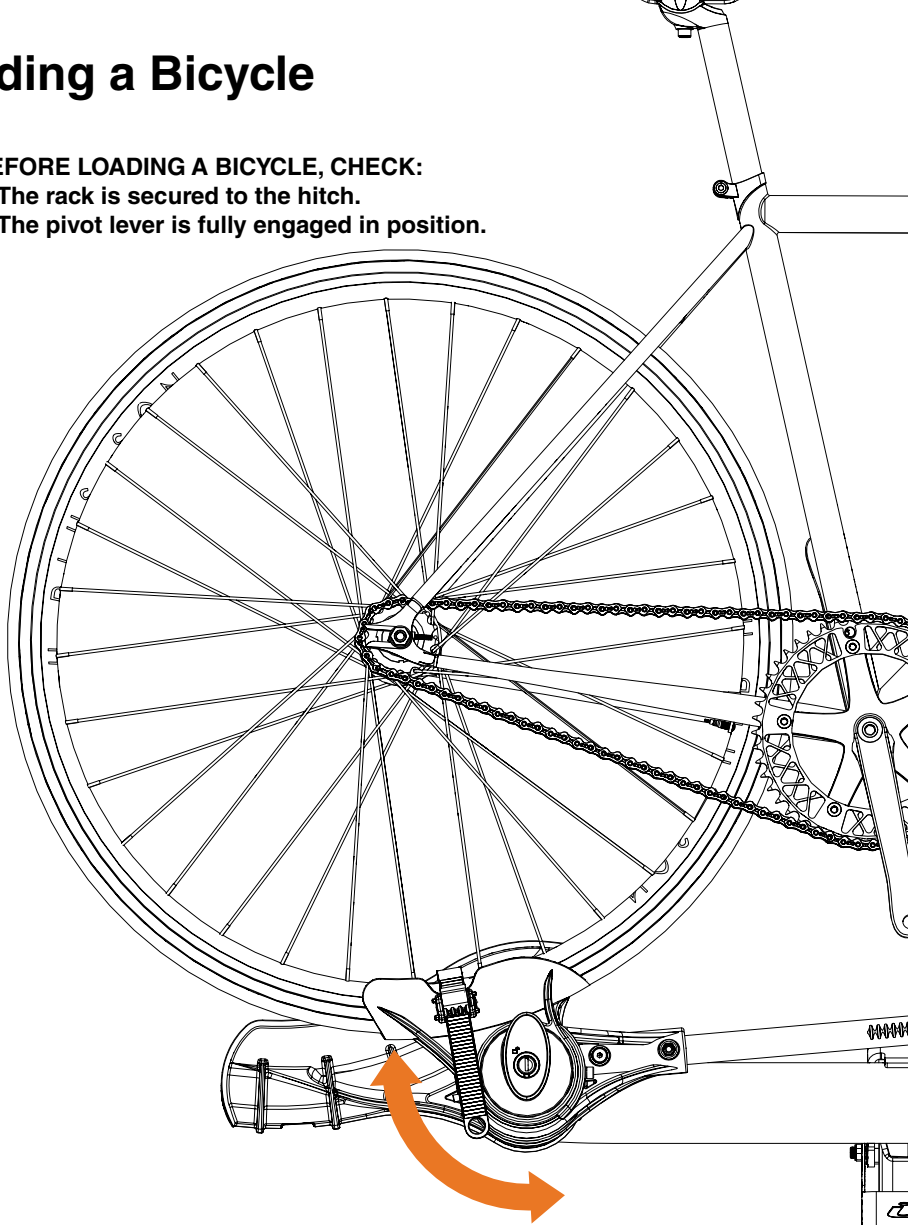

STEP 2


Adjust rear tire cradle position to fit bicycle. Tighten tire strap evenly.

- ! Tire straps can be adjusted independently from each side for a more secure fit on smaller wheels.



STEP 1


Place tire hook as close as possible to fork, then ratchet tire hook down tightly to the tire.

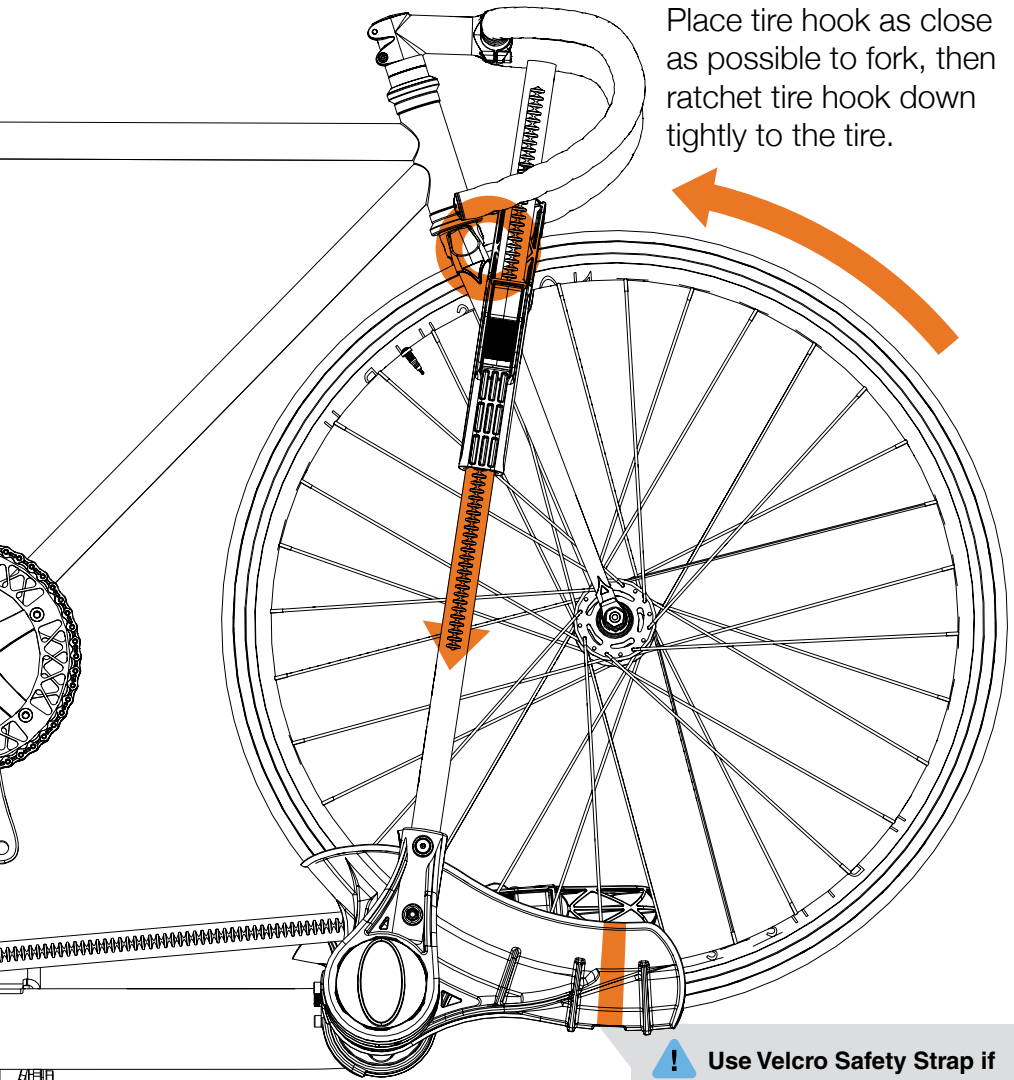

! Use Velcro Safety Strap if any of the following apply:


- Bike weight exceeds 35 lbs
- Wheelbase exceeds 46"
- Tire size exceeds 3.25"
- Rack is mounted to RV

Thread strap through wheel and under tire tray in position shown.

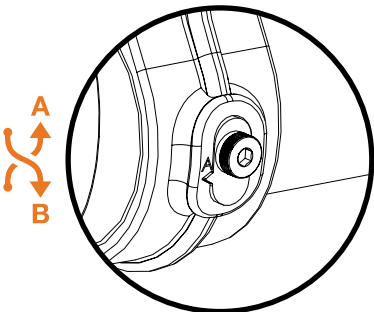

! Front tire cradle A/B Bolt Tabs can be reversed to adjust the pitch of the bike for a better fit or to eliminate interference between multiple bikes.



Push **Safety Latch** upward then push **Foot Lever** down to fold Transfer up or down.

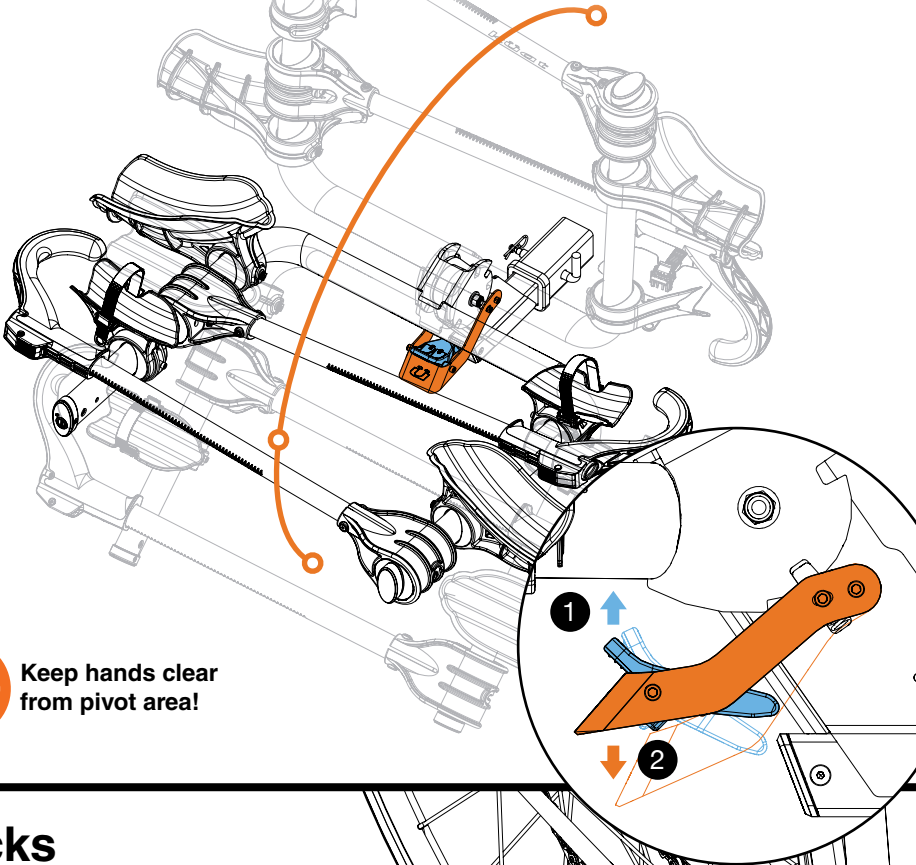

Keep hands clear
from pivot area!

Locks

Thread **Lock Cable** through bicycle, back through Lock Cable Loop, and insert cable tip inside lock port on rack arm.

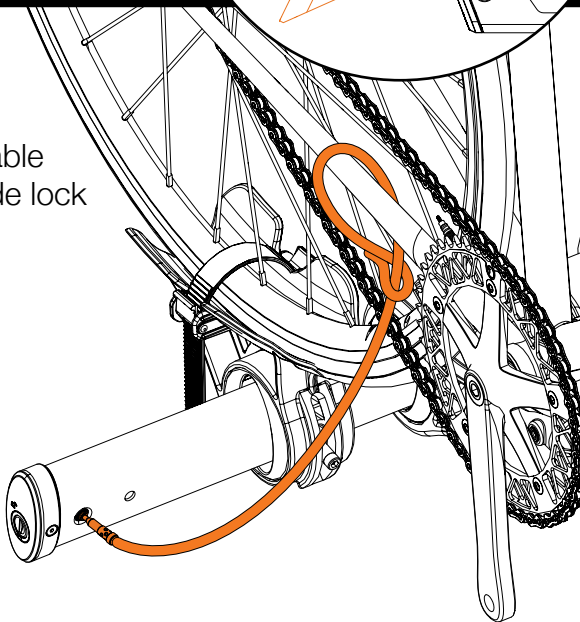

Küat Rack Warnings

TWO BIKE

TRANSFER v2

Number Of Bikes	Weight Per Bike Dedicated 2" Hitch	Weight Per Bike 1.25"/2" Hitch Version	Max Wheelbase	Max Tire Width
2	60 lb 27.2kg	40 lb 18.2kg	50 in 1270 mm	5 in 127 mm

WARNINGS

- Follow instructions for proper assembly, installation and use.
- Check tightness of all bolts and screws periodically.
- Make sure rack and vehicle receiver are in working condition before each use.
- Only use Küat hitch extenders with this product.
- Place front tire ratchet arm as close to front fork as possible.
- Do not use front tire bicycle fenders with this product.
- Do not exceed the bicycle or weight limits intended for this rack.
- Do not use rack off road. (rough, washed out, boulder-and-rut-strewn backroads)
-Smooth gravel roads are not considered off-road.
- Do not use tarps, rain covers or wind covers with this product.
- Dedicated 2" hitch version in the 2 bike configuration can be used on campers, recreational vehicles, or trailers with **CHASSIS MOUNTED RECEIVERS ONLY**.
- Do not take through automatic car wash.
- Drive responsibly.

If you have questions or problems, please contact Küat Racks directly by calling toll free 1(877)822-KUAT, or by email: info@kuatracks.com

ADVERTENCIAS

- Siga las instrucciones para un montaje, instalación y uso adecuados.
- Compruebe periódicamente la estanqueidad de todos los pernos y tornillos.
- Asegúrese de que el estante y el receptor del vehículo estén funcionando antes de cada uso.
- Utilice únicamente extensores de enganche Küat con este producto.
- Coloque el brazo de trinquete del neumático delantero lo más cerca posible de la horquilla delantera.
- No utilice guardabarros delanteros para bicicletas con este producto.
- No exceda los límites de bicicleta o peso destinados a esta parrilla.
- No utilice el bastidor Off-Road *. (* Caminos en bruto, deslavados, llenos de rocas y surcos)
-Los caminos de grava lisa no se consideran fuera de carretera.
- No use lonas, cubiertas para la lluvia o cubiertas para el viento con este producto.
- La versión de enganche de 2 "dedicada en la configuración de 2 bicicletas se puede utilizar en autocaravanas, recreativas vehículos o remolques con RECEPTORES MONTADOS EN EL CHASIS ÚNICAMENTE.
- No realice el lavado automático de automóviles.
- Conduzca responsablemente.

AVERTISSEMENTS

- Suivez les instructions pour un assemblage, une installation et une utilisation appropriés.
- Vérifiez régulièrement le serrage de tous les boulons et vis.
- Assurez-vous que le support et le récepteur du véhicule sont en état de marche avant chaque utilisation.
- Utilisez uniquement des rallonges d'attelage Küat avec ce produit.
- Placer le bras de cliquet du pneu avant le plus près possible de la fourche avant.
- N'utilisez pas d'ailes de vélo avant avec ce produit.
- Ne dépassez pas les limites de vélo ou de poids prévues pour ce support.
- N'utilisez pas le rack Off-Road *. (* Routes rugueuses, délavées, parsemées de rochers et d'ornières)
-Les routes de gravier lisses ne sont pas considérées comme hors route.
- N'utilisez pas de bâches, de housses de pluie ou de vent avec ce produit.
- La version avec attelage de 2 po dédié dans la configuration à 2 vélos peut être utilisée sur les campeurs, récréative véhicules ou remorques avec RÉCEPTEURS MONTÉS SUR CHÂSSIS UNIQUEMENT.
- Ne passez pas au lave-auto automatique.
- Conduisez de manière responsable.

NO WORRIES LIMITED WARRANTY

We stand behind our products, and our customer service reps are waiting to help you out if you have any problems with your product. Our limited warranty covers your purchase for three years. You can review our limited warranty at our website or call customer service at the number below if you have questions or need a repair, replacement, or refund

Questions or comments?

Drop us an email or call us directly!

kuat.com | info@kuat.com | 877.822.5828

Notes:

kuat[®]

1.877.822.5828
info@kuatracks.com
kuatracks.com