




VARIALTM XL

EVA FLOOR KIT

ASSEMBLY | USER GUIDE

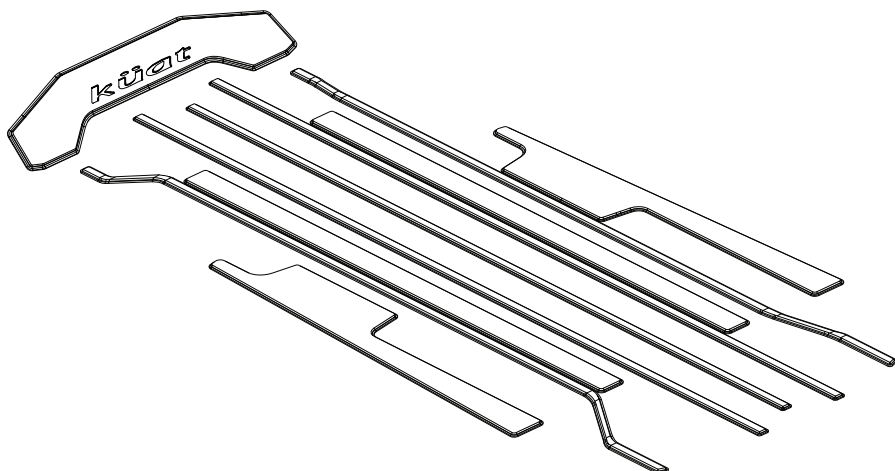

ASSEMBLY VIDEO

Table of Contents

1

Introduction

Safety Instructions

Parts, Important Notes & Tips

3

3

5

2

Installation

Surface Prep and Positioning

Adhering and Checking the Panels

6

6

8

3

VARIAL™ XL EVA Floor Kit FAQs

9

4

No Worries Limited Warranty

10

Dangers, Warnings, Cautions and Notices

Particularly important information is presented in the following form:

 **DANGER**

This danger symbol identifies special instructions or procedures which, if not correctly followed, will result in serious injury, or death.

 **WARNING**

This warning symbol identifies special instructions or procedures which, if not correctly followed, could result in serious injury, or death.

 **CAUTION**

This caution symbol identifies special instructions or procedures which, if not strictly observed, could result in minor or moderate injury.

NOTICE

This symbol indicates points of particular interest for more efficient and convenient operation.

SAFETY INSTRUCTIONS

Failure to follow these safety instructions voids the product warranty and holds you responsible for any damage or accidents.

WARNING

- Follow instructions for proper assembly, installation and use.
- Check the tightness of all hardware and mounts before each use.
- Make sure your Varial XL is in working condition before each use.
- Refer to your Varial XL User Guide for the applicable weight capacity. Distribute all weight evenly and never exceed the lowest limit specified by your Varial XL, vehicle, or crossbars.
- Additional roof weight affects vehicle handling. Drive more carefully, especially in turns and at higher speeds. Be alert for garage entrances, limited clearances, overhanging branches, etc.
- Regularly check your Varial XL, Mounts, and all other product components for damaged, worn, and/or missing parts. Replace parts only with manufacturer-branded parts obtained from Küat or an authorized dealer — non-genuine or modified parts, and any damage they cause, are not covered under warranty.
- Do not otherwise modify the Varial XL or its accessories.
- Always abide by state and local laws while using this product.
- Always secure cargo with two load straps before driving.
- This product is not designed for and should not be used on terrain which requires aftermarket upgrades to your 4WD suspension, or use that includes rock-crawling, jumping, bogging, or high speed off road driving.
 - An experienced overland driver is required to take into consideration the speed of the vehicle and the total weight of the vehicle load and its distribution when encountering rutted and/or rocky terrain when using this product, and must reduce the load, speed, or both as necessary. Smooth gravel roads are not considered off-road.
- When driving on rough terrain use the included load straps to secure your cargo and, check mounts and hardware tightness periodically throughout your trip — vibration and rough surfaces can loosen fasteners faster than normal driving.

NOTICE

- Do not take through an automatic car wash.
- Remove your Varial XL when not in use and store it in a clean, dry place.

SAFETY INSTRUCTIONS CONT.

El incumplimiento de estas instrucciones de seguridad anula la garantía del producto y le hace responsable de cualquier daño o accidente.

Le non-respect de ces consignes de sécurité entraîne l'annulation de la garantie du produit et vous rend responsable de tout dommage ou accident.

! ADVERTENCIAS

- Sigue las instrucciones para un montaje, instalación y uso correctos.
- Comprueba que todos los elementos de fijación y soportes estén bien apretados antes de cada uso.
- Asegúrate de que tu Variar XL esté en perfectas condiciones de funcionamiento antes de cada uso.
- Consulta la Guía del usuario de tu Variar XL para conocer la capacidad de carga aplicable. Distribuye el peso de manera uniforme y nunca supere el límite mínimo especificado por tu Variar XL, el vehículo o las barras transversales.
- El peso adicional en el techo afecta al comportamiento del vehículo. Conduce con más precaución, especialmente en las curvas y a velocidades elevadas. Preste atención a las entradas de garaje, los espacios reducidos, las ramas que sobresalen, etc.
- Revise periódicamente su Variar XL, los soportes y el resto de componentes del producto para detectar piezas dañadas, desgastadas o que falten. Sustituya las piezas únicamente por piezas originales del fabricante adquiridas a Küat o a un distribuidor autorizado; las piezas no originales o modificadas, así como cualquier daño que causen, no están cubiertas por la garantía.
- No modifique de ningún otro modo el Variar XL ni sus accesorios.
- Cumpla siempre con la legislación estatal y local al utilizar este producto.
- Asegure siempre la carga con dos correas de sujeción antes de conducir.
- Este producto no está diseñado para, ni debe utilizarse en, terrenos que requieran modificaciones no originales en la suspensión de su 4x4, ni para usos que incluyan escalada de rocas, saltos, atascos o conducción todoterreno a alta velocidad.
 - Un conductor con experiencia en conducción todoterreno debe tener en cuenta la velocidad del vehículo y el peso total de la carga, así como su distribución, al circular por terrenos con surcos y/o rocosos al utilizar este producto, y debe reducir la carga, la velocidad o ambas, según sea necesario. Las carreteras de grava en buen estado no se consideran todoterreno.
- Cuando conduzcas por terrenos accidentados, utiliza las correas de sujeción incluidas para asegurar la carga y comprueba periódicamente durante el viaje que los soportes y los elementos de fijación estén bien apretados: las vibraciones y las superficies irregulares pueden aflojar los elementos de fijación más rápidamente que en condiciones normales de conducción.

AVISO

- No lo pases por un túnel de lavado automático.
- Retira tu Variar XL cuando no lo utilices y guárdalo en un lugar limpio y seco.


! ADVERTISSEMENTS

- Suivez les instructions pour un montage, une installation et une utilisation corrects.
- Vérifiez le serrage de toutes les fixations et de tous les supports avant chaque utilisation.
- Assurez-vous que votre Variar XL est en bon état de fonctionnement avant chaque utilisation.
- Reportez-vous au guide d'utilisation de votre Variar XL pour connaître la capacité de charge applicable. Répartissez le poids de manière homogène et ne dépassez jamais la limite minimale spécifiée par votre Variar XL, votre véhicule ou vos barres de toit.
- Une charge supplémentaire sur le toit affecte la tenue de route du véhicule. Conduisez avec plus de prudence, en particulier dans les virages et à vitesse élevée. Soyez vigilant aux entrées de garage, aux hauteurs libres limitées, aux branches en surplomb, etc.
- Vérifiez régulièrement votre Variar XL, ses fixations et tous les autres composants du produit afin de détecter d'éventuelles pièces endommagées, usées et/ou manquantes. Remplacez les pièces uniquement par des pièces d'origine du fabricant, obtenues auprès de Küat ou d'un revendeur agréé — les pièces non d'origine ou modifiées, ainsi que tout dommage qu'elles pourraient causer, ne sont pas couverts par la garantie.
- N'apportez aucune autre modification au Variar XL ou à ses accessoires.
- Respectez toujours les lois nationales et locales lors de l'utilisation de ce produit.
- Arrimez toujours le chargement à l'aide de deux sangles avant de prendre la route.
- Ce produit n'est pas conçu pour, et ne doit pas être utilisé sur, des terrains nécessitant des modifications après-vente de la suspension de votre 4x4, ni pour des utilisations telles que le franchissement de rochers, les sauts, l'enlèvement ou la conduite tout-terrain à grande vitesse.
 - Lors de l'utilisation de ce produit sur des terrains accidentés et/ou rocailleux, un conducteur expérimenté en conduite tout-terrain doit tenir compte de la vitesse du véhicule ainsi que du poids total de son chargement et de sa répartition, et doit réduire la charge, la vitesse, ou les deux, si nécessaire. Les routes en gravier en bon état ne sont pas considérées comme des terrains tout-terrain.
- Lorsque vous roulez sur un terrain accidenté, utilisez les sangles de fixation fournies pour arrimer votre chargement et vérifiez régulièrement le serrage des fixations et des pièces de montage tout au long de votre trajet : les vibrations et les surfaces irrégulières peuvent desserrer les fixations plus rapidement qu'en conduite normale.

AVIS

- Ne passez pas dans un tunnel de lavage automatique.
- Retirez votre Variar XL lorsque vous ne l'utilisez pas et rangez-le dans un endroit propre et sec.

Parts

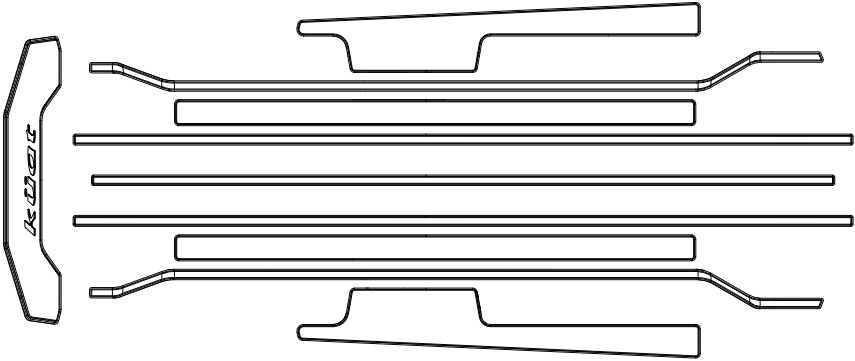

(10) EVA Floor Kit

1 Install the EVA Floor Kit with the Varial XL mounted on your vehicle or placed on a clean, flat surface.


2 Additional supplies needed: isopropyl alcohol and a clean microfiber cloth. If the surface of your Varial XL is not completely clean and free of debris, the strips will not adhere properly.

3 Don't forget to **register** your Varial XL!

Installation

- 1 Installation can be done with the Varial XL mounted or placed on a flat surface.

Open the Varial XL and remove all cargo. Using isopropyl alcohol and a clean Microfiber cloth, clean the interior surfaces where the EVA panels will be installed. Allow the surfaces to dry completely before continuing.

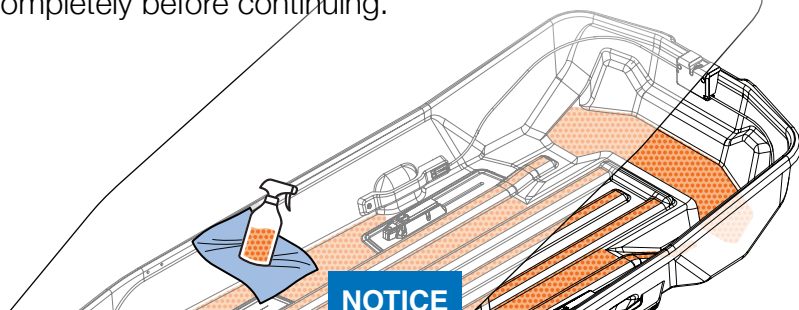


NOTICE




The surface of your Varial XL must be completely clean and free of debris for the strips to adhere properly.

- 2 Without removing the adhesive backing, position the EVA panels inside the Varial XL. Align each panel with the corresponding contours of the floor.

NOTICE


After a panel is fully pressed into place, it cannot be easily removed and repositioned.

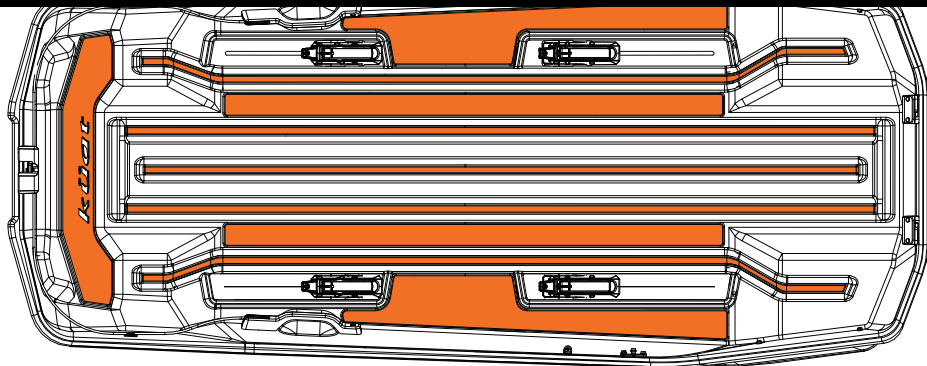

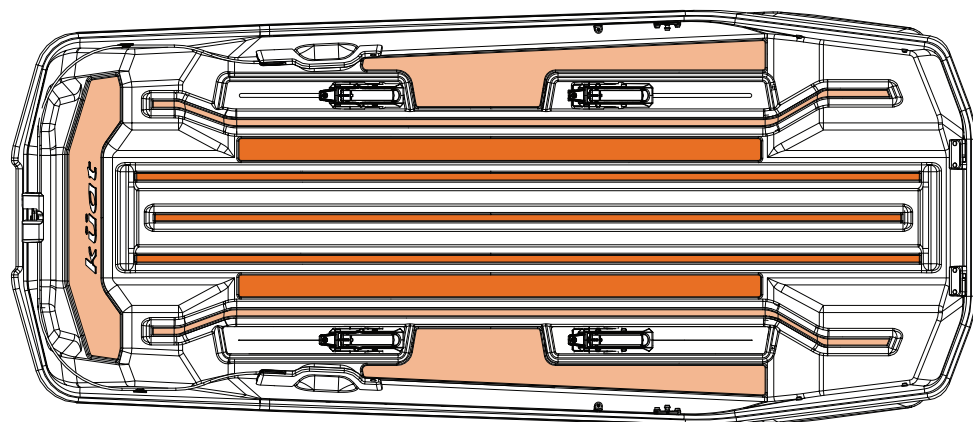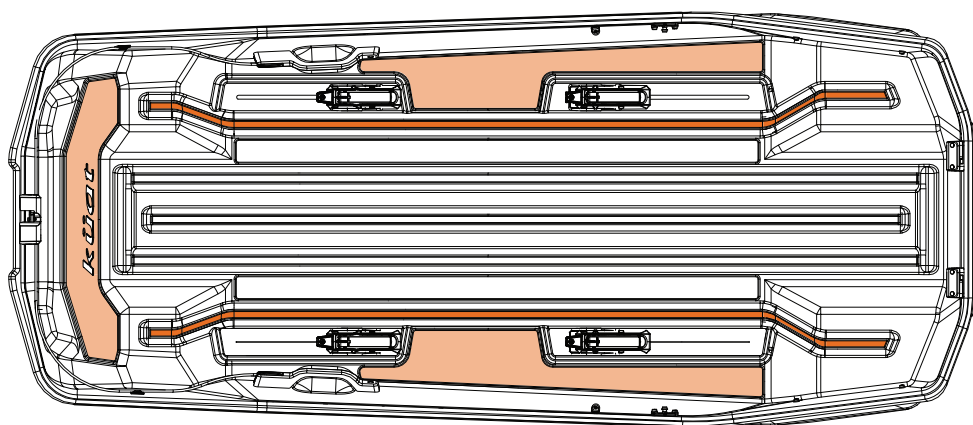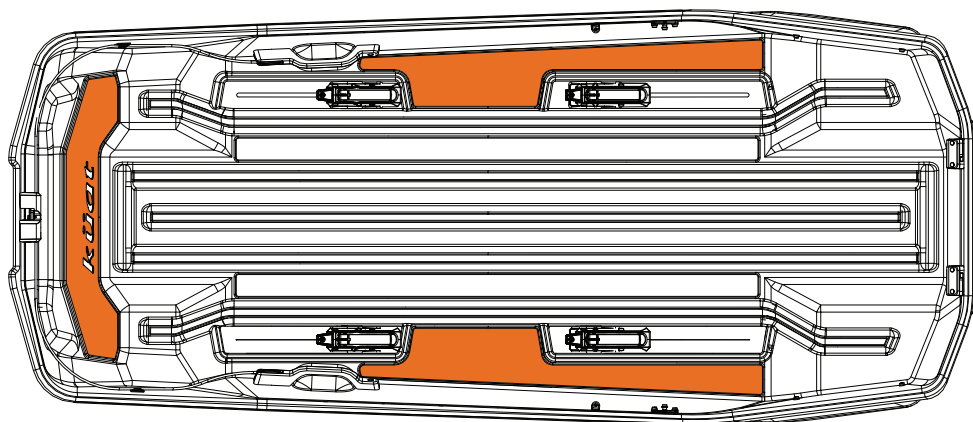

Adhearing and Checking the Panels

- 1 Working with one EVA panel at a time, partially remove the adhesive backing and align the panel with the floor contours. Gradually remove the remaining backing while pressing the panel firmly into place.

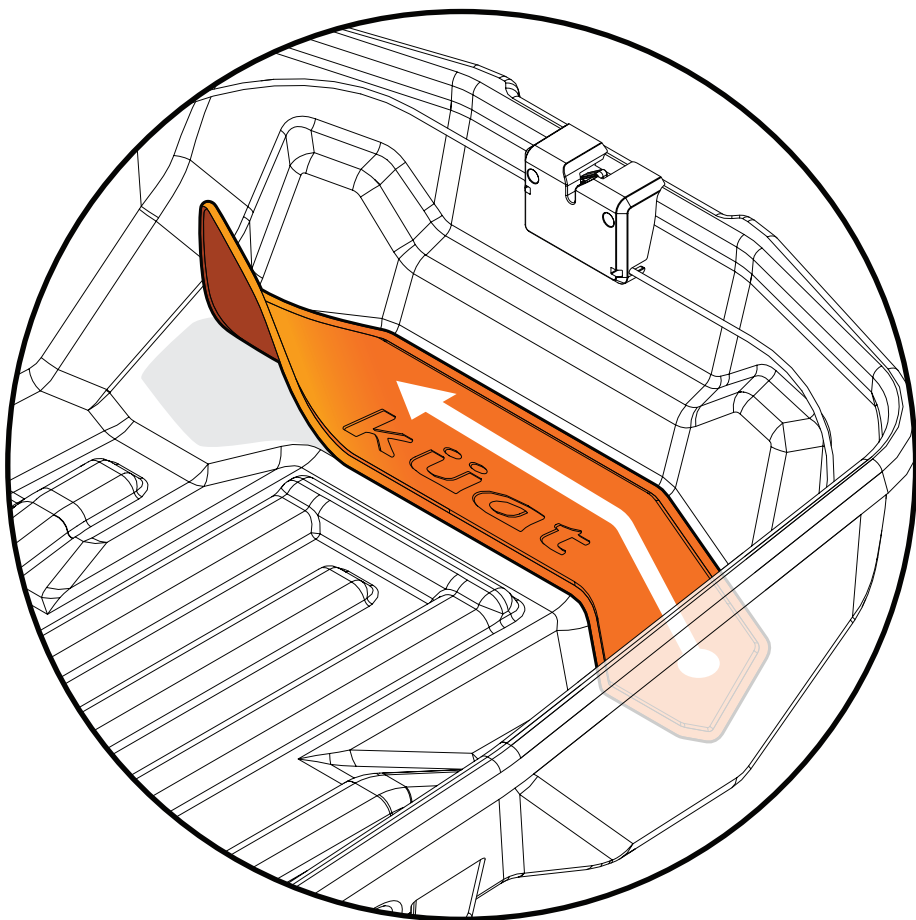

- 2 Confirm that all EVA panels are fully adhered and that no edges are lifted. Make sure the panels do not cover the mounting hardware or interfere with the load straps.

VARIALTM XL EVA FLOOR KIT FAQs

Q: Can I install the EVA Floor Kit while my Varial XL is mounted on my vehicle?

A: Yes. The EVA Floor Kit can be installed while the Varial XL is mounted on the vehicle or while it is placed on a clean, flat surface. Remove all cargo and clean and dry the installation surfaces before beginning.

Q: How do I clean the EVA Floor Kit?

A: Wipe the EVA foam panels with mild soap and water. Allow them to dry completely before loading your gear.

Q: What is EVA?

A: EVA stands for ethylene-vinyl acetate, a lightweight, flexible, and water-resistant foam. The EVA panels provide cushioning and help protect the Varial XL interior and your gear from bumps, scratches, rubbing, and movement. The EVA Floor Kit does not replace the required load straps.

Q: Is the EVA Floor Kit available in other colors?

A: No. The EVA Floor Kit is available only in black.

Q: Can I reposition the EVA panels after installation?

A: Dry-fit and align all EVA panels before removing the adhesive liners. Once the adhesive contacts the Varial XL, only limited adjustment is possible. After a panel is fully pressed into place, it cannot be easily removed and repositioned.

Q: Does the EVA Floor Kit replace the load straps?

A: No. The EVA Floor Kit may help reduce rubbing and movement, but it does not secure cargo. Always use the load straps as directed in your Varial XL User Guide.

NO WORRIES LIMITED WARRANTY

We stand behind our products, and our customer service reps are waiting to help you out if you have any problems with your product. Our limited warranty covers your purchase for three years. You can review our limited warranty on our website or call customer service at the number below if you have questions or need a repair, replacement, refund, or a copy of the limited warranty.

www.kuat.com/warranty

Questions or comments?

Drop us an email or call us directly!

kuat.com | kuat.com/contact | 877.822.5828

kuat[®]

1.877.822.5828
kuat.com/contact