

Thunderbird


INDIAN GARMENT PATTERNS



Patterns and Instructions for VEST LEGGINGS BREECHCLOUT


Tandy LEATHER COMPANY 1939

DIST. BY TANDY WISE CO. FORT WORTH, TEXAS

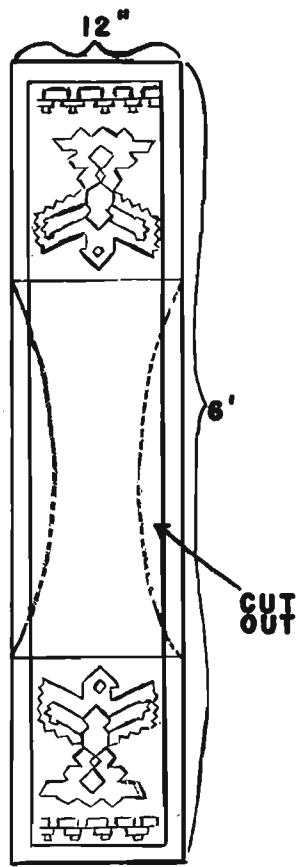


Breechclout

1. Cut material one foot wide and six feet long. The clout should reach almost to the knees in front and one inch longer in back. Try on and adjust length and width to fit size accordingly.
2. If desired, bind edges of clout with 1" leather binding folded in half. (Sew or stitch.)
3. For greater comfort — center portions of breech clout may be cut out. See illustration.
4. Use Dri Mark pens to decorate. Use designs on vest (see reverse side) or make your own.
5. Place clout between legs and loop over belt in front and back.

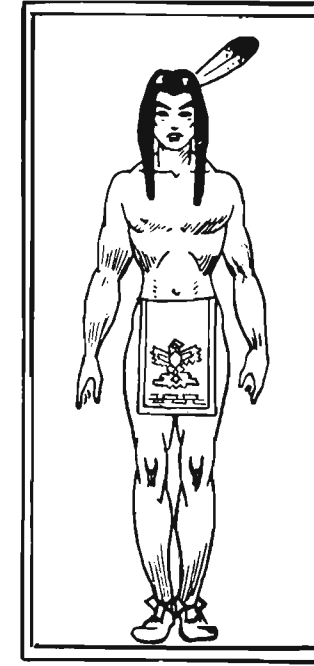

Due to the size of hides you may have to use two or three pieces of leather to make the complete 6 ft. length of your breechclout.

© Copyright 2010 by Tandy Leather Factory All Rights Reserved

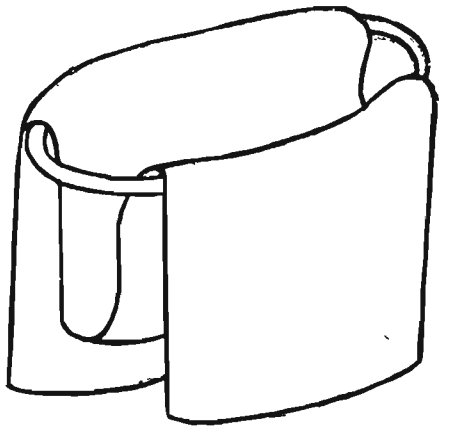

BREECHCLOUT HANGS FROM BELT AROUND WAIST.

Use Leather For Projects

For good results use the following leathers:

Garment Cabretta, Shelter Cape, Glove Horse, Natural Full Side Splits, and Sueded Cowhide Splits.

COLORS:

Please refer to latest Tandy catalog for complete listing of colors, or check with your Tandy dealer.

Garment Suede

Sueded Cowhide Splits

Garment Cabretta

(No part of this or any other page may be re-printed without written permission.)

PRINTED IN U.S.A.

Requirements for Projects:

(Hides Average 6 to 8 sq. ft.)*

A. Vest

1. You will need 6 sq. ft. of leather.
2. For leather binding — you will need approximately 13 ft. of one inch wide leather.
3. You will need 19 ft. of leather lace for stitching binding to garment.
4. You will need approximately 3 ft. of lace for stitching seams of garment together.

B. Breechclout

1. You will need 6 sq. ft. of leather.
2. For leather binding — you will need approximately 16 ft. of one inch wide leather.
3. You will need 24 ft. of leather lace for stitching binding to garment.
4. You will need approximately 3 ft. of lace for stitching seams of garment together.

C. Leggings

1. You will need 16 sq. ft. of leather.
2. For leather binding — you will need approximately 10 ft. of one inch wide leather.
3. You will need 15 ft. of leather lace for stitching binding to garment.
4. You will need approximately 8 ft. of lace for stitching seams of garment together.

Leather is a natural product, therefore sizes of skins will vary. You may require one or two skins depending upon the leather available. Please check your Tandy dealer.

Leggings

1. Measure A to C for thigh circumference; A to B for crotch to ankle; BD to beltline — measure waist to ankle. (See Fig. 1.) Cut patterns from wrapping paper or newspaper.
2. Make two full size leggings, but watch that you cut a "left" and a "right," by turning pattern over for the 2nd legging.
3. Now cut 1" leather strips and sew or stitch to areas illustrated by the dotted lines. This will be your binding. Also bind edges of bottoms if desired.
4. Now fold legging on fold line and sew or stitch on sew line.
5. Cut 1/4" strips parallel to the bottom of the leggings, illustrated by the shaded area. This will give your leggings a fringed effect.
6. Decorate leggings to suit taste. Use Dri Mark pens and designs on vest (see reverse side) or make your own.
7. The pattern shown was measured for a person with a thigh measurement of 21".



Use Dry Mark Pens To Decorate

1. Use Dri Mark Pens for coloring the design. Follow the patterns of squares that fit your design. Start with light colors first and then use your dark ones. If you will notice there is a pointed end and a slanted edge on the Dri Mark pen. For small areas be sure to use the fine point. Be very careful when working with the colors—not to smear them. See Figure 3.
2. After using the Dri Mark pens on the leather you may use a ball point pen to sharpen up your design. The ball point pen is used only on the outline of the design and between the different colors.



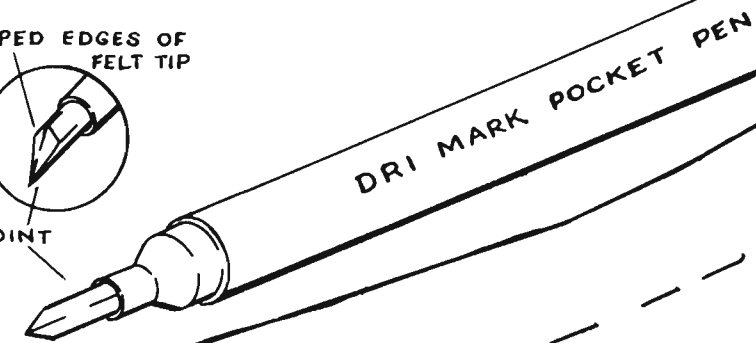


FIG. 1


LEGGING PATTERN (Top part only)

22"

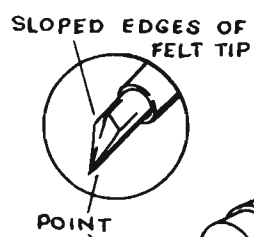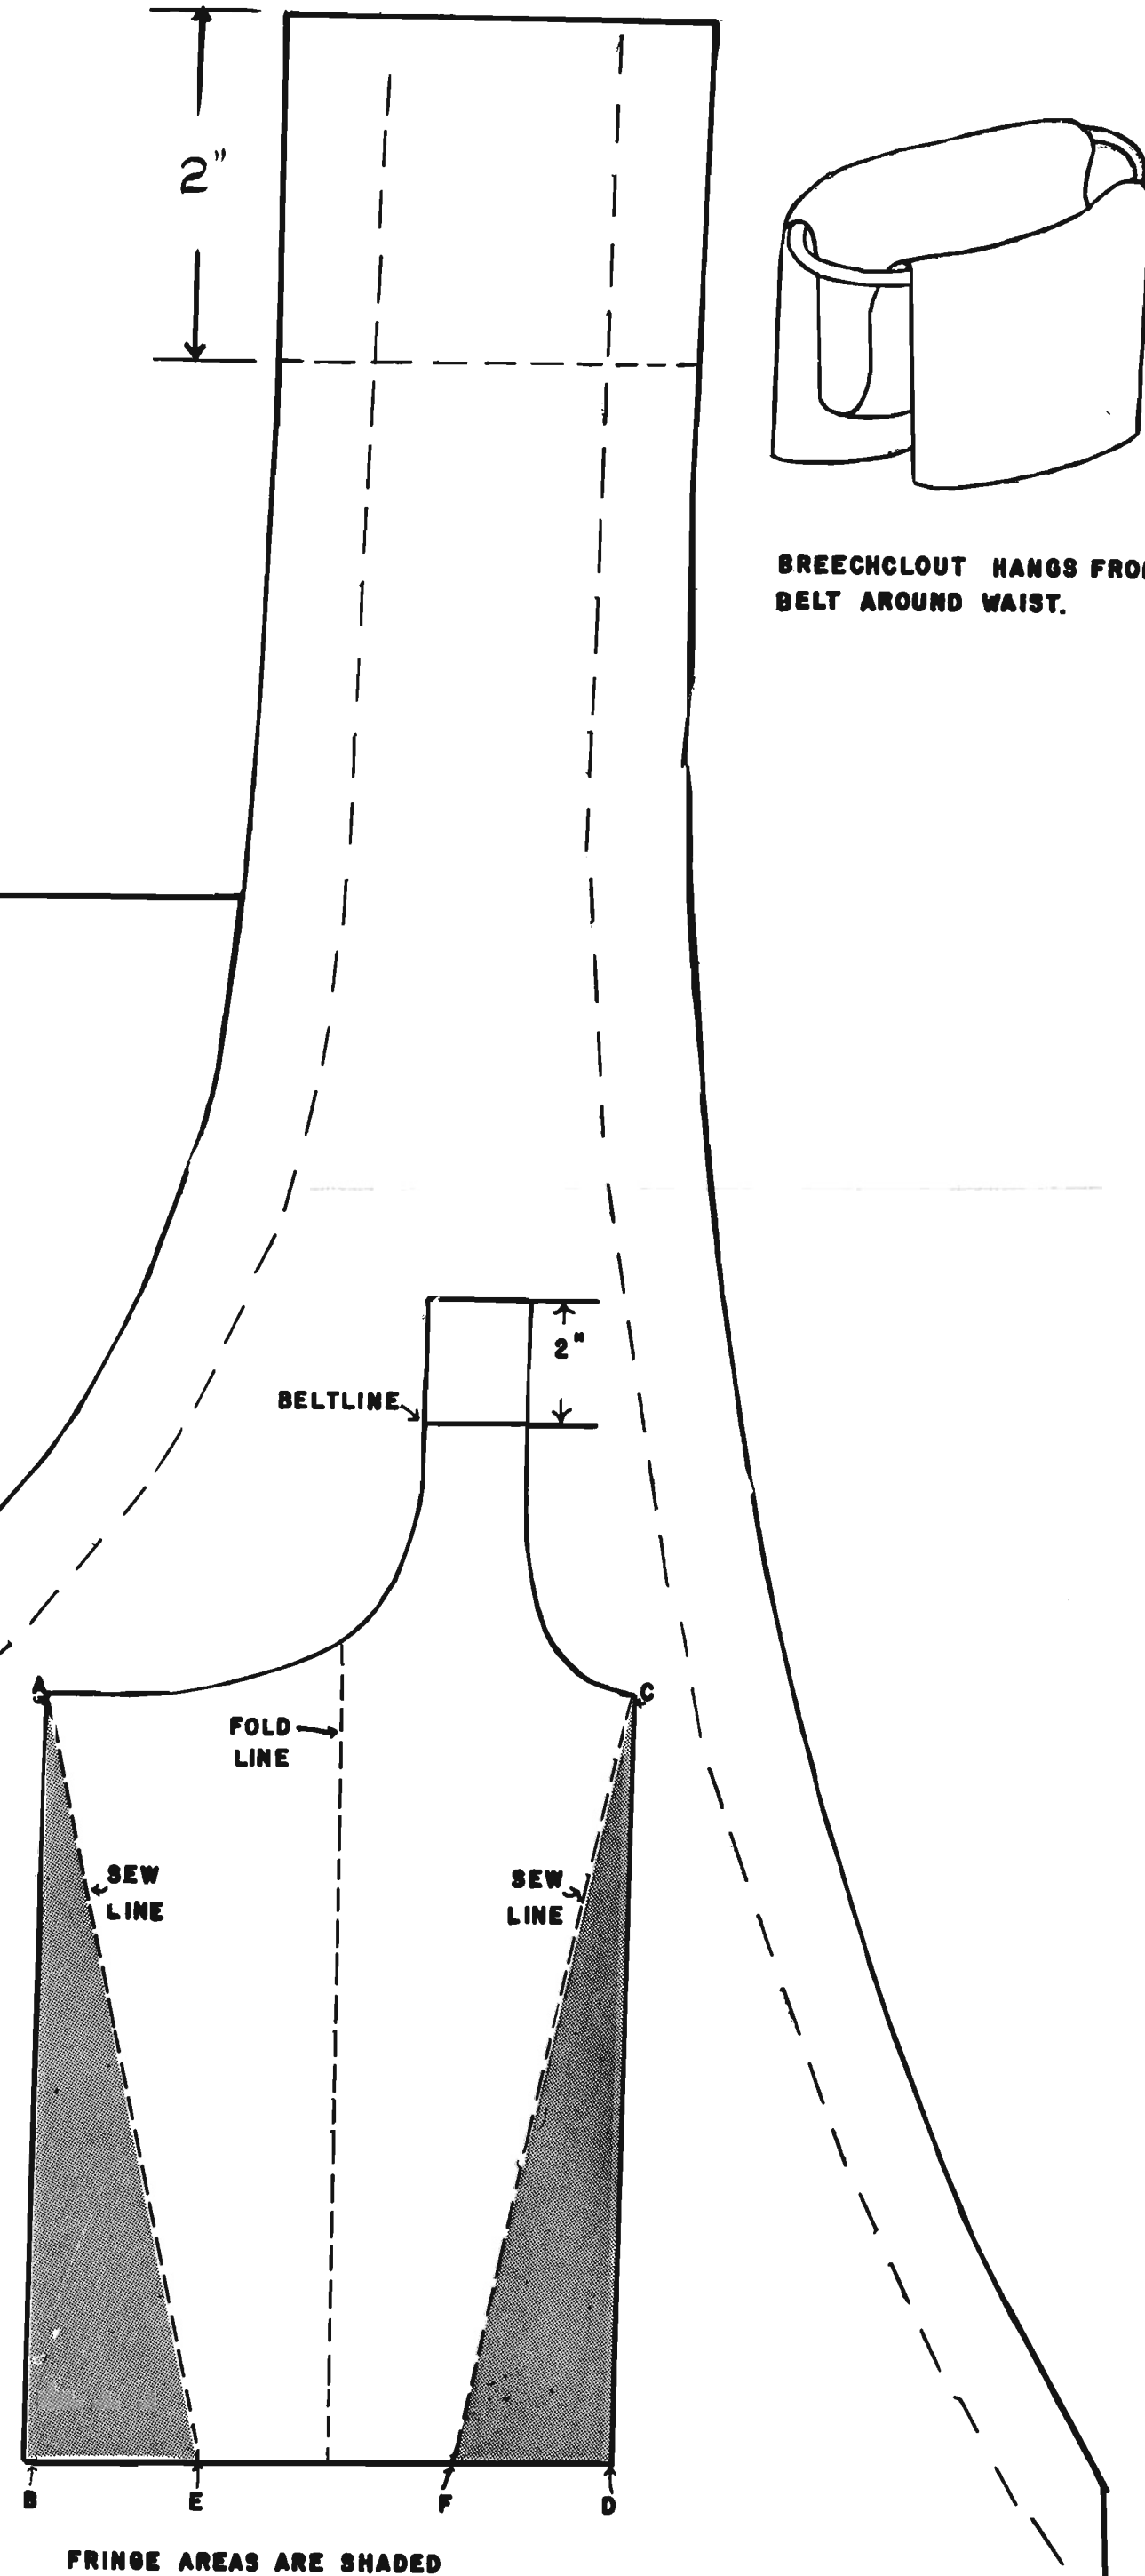

THUNDER

INDIAN

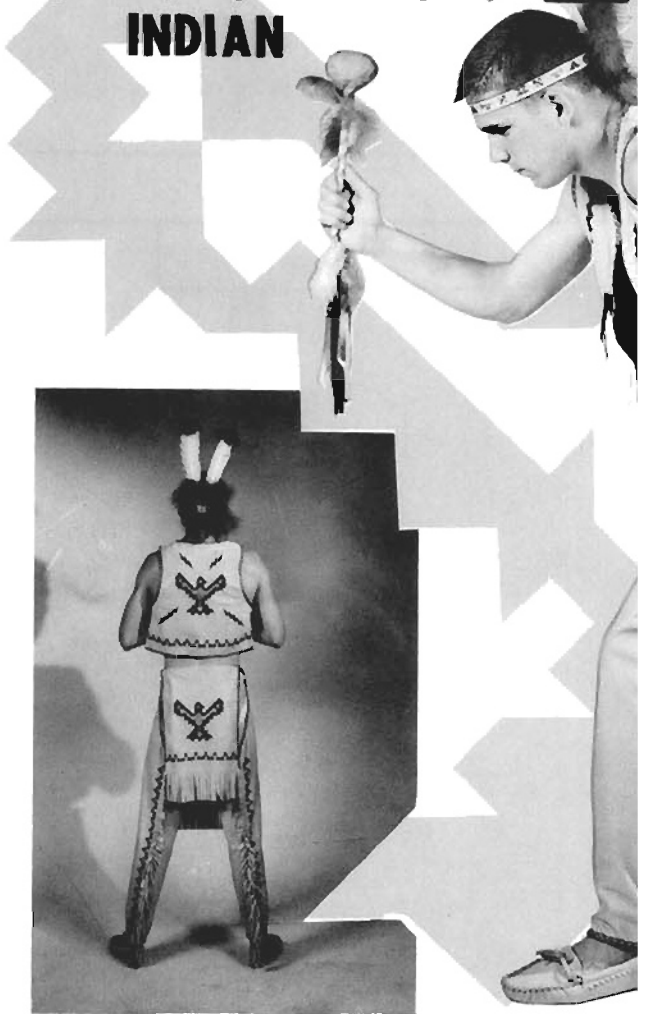

Use Leather

For good results use the following leathers:

Garment Cabretta, Shelter Capc, Glove Horse, Natural Full Side Splits, and Sueded Cowhide Splits.

Garment Suede

Sueded

terbird

GARMENT PATTERNS

DIST. BY
TANDY WHSE CO
FORT WORTH, TEXAS

Patterns and Instructions for VEST LEGGINGS BREECHCLOUT

tandy
LEATHER COMPANY 1939


er For Projects

COLORS:

Please refer to latest Tandy catalog for complete listing of colors, or check with your Tandy dealer.

1 Cowhide Splits

Garment Cabretta

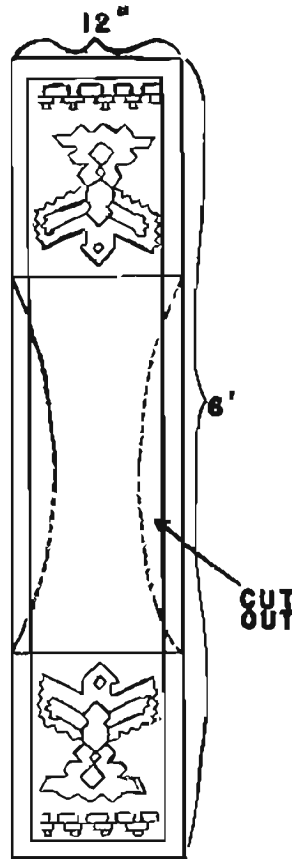

Bro

1. Cut material c
The clout should
front and one in
adjust length an
2. If desired, bin
binding folded i
3. For greater con
clout may be cut
4. Use Dri Mark
vest (see reverse
5. Place clout bet
front and back.

Due to the size o
or three pieces c
6 ft. length of y

(No part of this or any other

Requirem
(Hides Av



A. Vest

1. You will need 6 sq. ft. of leather.
2. For leather binding — you will need approximately 13 ft. of one inch wide leather.

Breechclout

© Copyright 2010 by Tand
All Rights Rese

one foot wide and six feet long.
d reach almost to the knees in
ch longer in back. Try on and
d width to fit size accordingly.
d edges of clout with 1" leather
n half. (Sew or stitch.)
fort — center portions of breech
out. See illustration.
pens to decorate. Use designs on
side) or make your own.
etween legs and loop over belt in

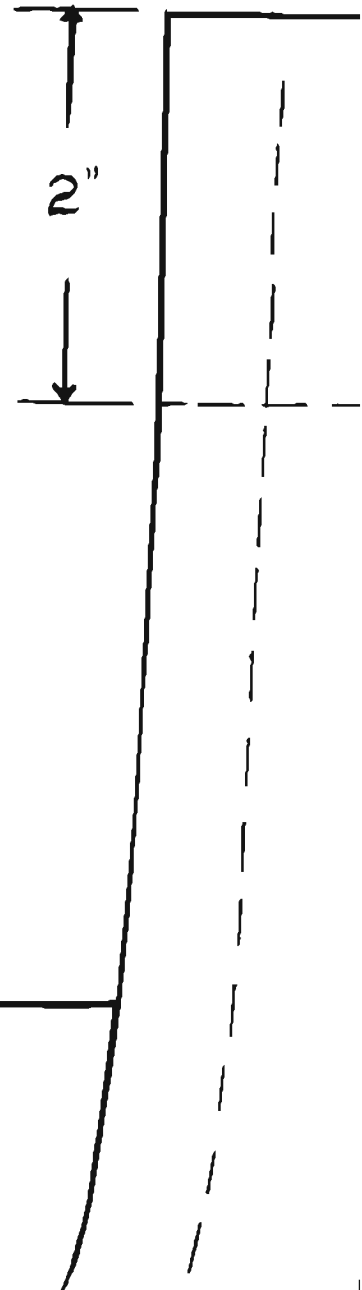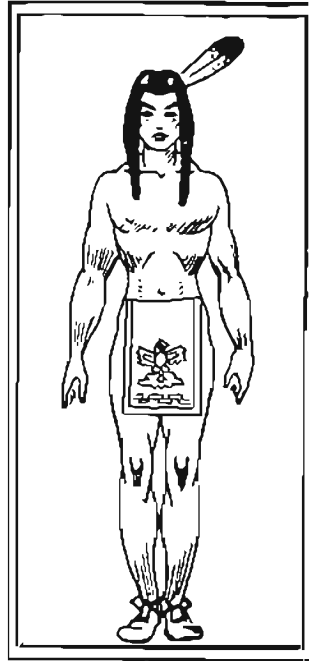

f hides you may have to use two
f leather to make the complete
our breechclout.

page may be re-printed without written permission.)


PRINTED IN U.S.A.

ents for Projects:
erage 6 to 8 sq. ft.) *

B. Breechclout

1. You will need 6 sq. ft. of leather.
2. For leather binding — you will need approximately 16 ft. of one inch wide leather.


y Leather Factory
erved

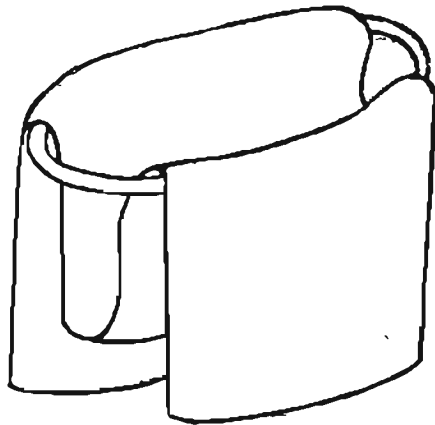

**BREECHCLOUT HANGS FROM
BELT AROUND WAIST.**

Leggings

1. Measure A to C for thigh circumference; A to D crotch to ankle; BD to beltline — measure waist to ankle. (See Fig. 1.) Cut patterns from wrapping paper or newspaper.
2. Make two full size leggings, but watch that you make a "left" and a "right," by turning pattern over for 2nd legging.
3. Now cut 1" leather strips and sew or stitch to the top of the leggings as illustrated by the dotted lines. This will be your waistband. Also bind edges of bottoms if desired.
4. Now fold legging on fold line and sew or stitch down the center fold line.
5. Cut $\frac{1}{4}$ " strips parallel to the bottom of the leggings as illustrated by the shaded area. This will give your leggings a fringed effect.
6. Decorate leggings to suit taste. Use Dri Mark and designs on vest (see reverse side) or make your own.
7. The pattern shown was measured for a person with a thigh measurement of 21".

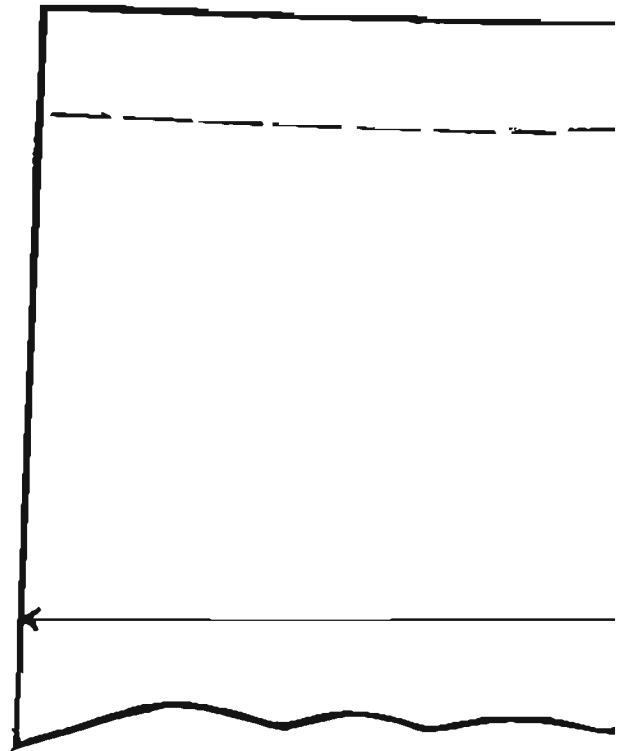

B for
te to
paper

u cut
r the


areas
bind-

h on


gings,
r leg-

pens
your

with

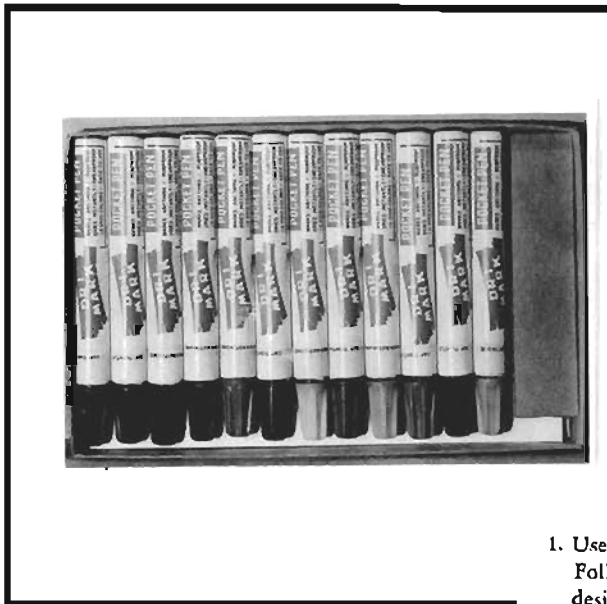

3. You will need 19 ft. of leather lace for stitching binding to garment.
4. You will need approximately 3 ft. of lace for stitching seams of garment together.

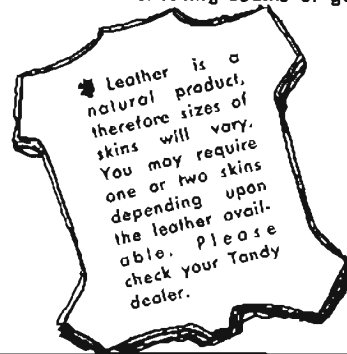


C. Legging

1. You will need 10 ft. of or
2. For leather
3. You will need
4. You will need

Use Dry Mark Pen

1. Use Dri Mark Pens for coloring the design. Follow the patterns of squares that fit your design. Start with light colors first and then use your dark ones. If you will notice there is a pointed end and a slanted edge on the Dri Mark pen. For small areas be sure to use the fine point. Be very careful when working with the colors—not to smear them. See Figure 3.
2. After using the Dri Mark pens on the leather you may use a ball point pen to sharpen up your design. The ball point pen is used only on the outline of the design and between the different colors.

SLOPED EDGES OF
FELT TIP

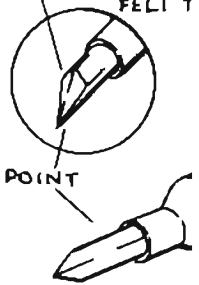

LEGGING PATTERN (Top part of)

22"

3. You will need 24 ft. of leather lace for stitching binding to garment.
4. You will need approximately 3 ft. of lace for stitching seams of garment together.

S
 need 16 sq. ft. of leather.
 binding — you will need approximately
 10 inch wide leather.
 need 15 ft. of leather lace for stitching
 garment.
 need approximately 8 ft. of lace for
 seams of garment together.

Patterns To Decorate

OF
 TIP


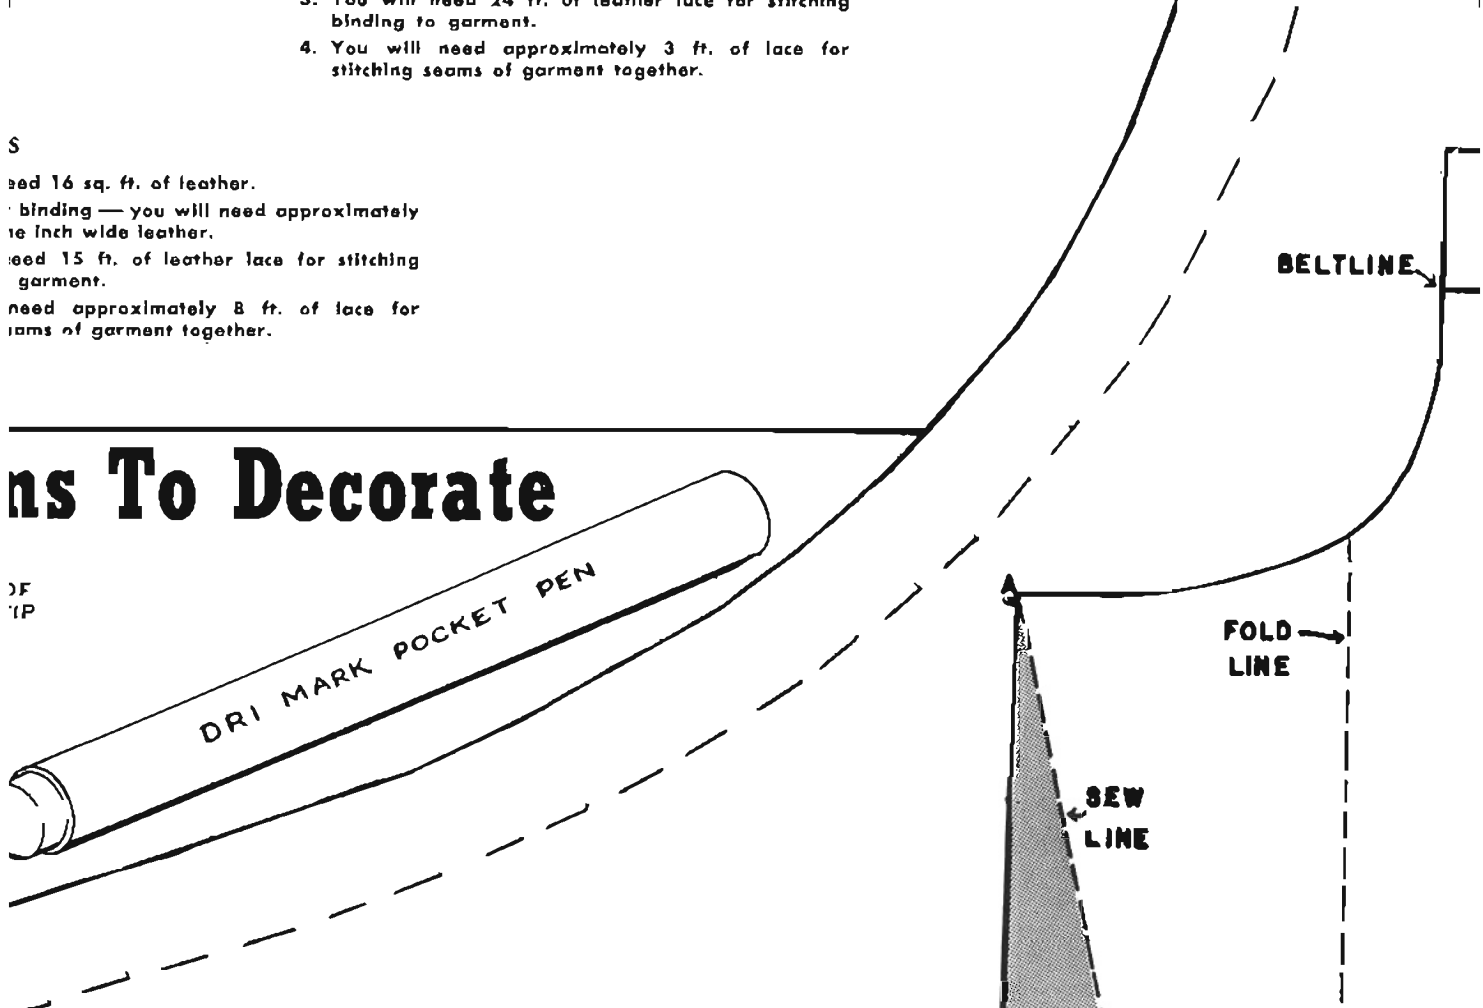



FIG. 1



FRINGE AREAS ARE SHADED


PATTERN
 (only)

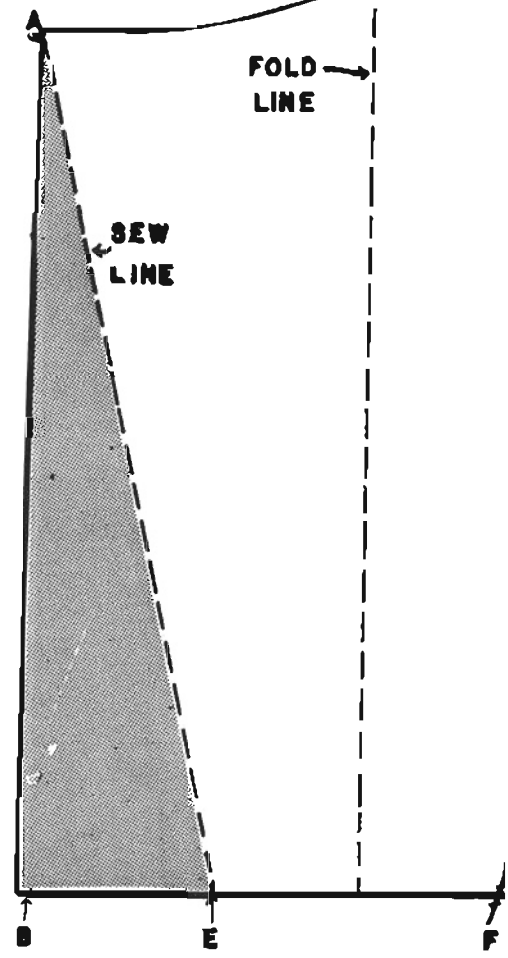

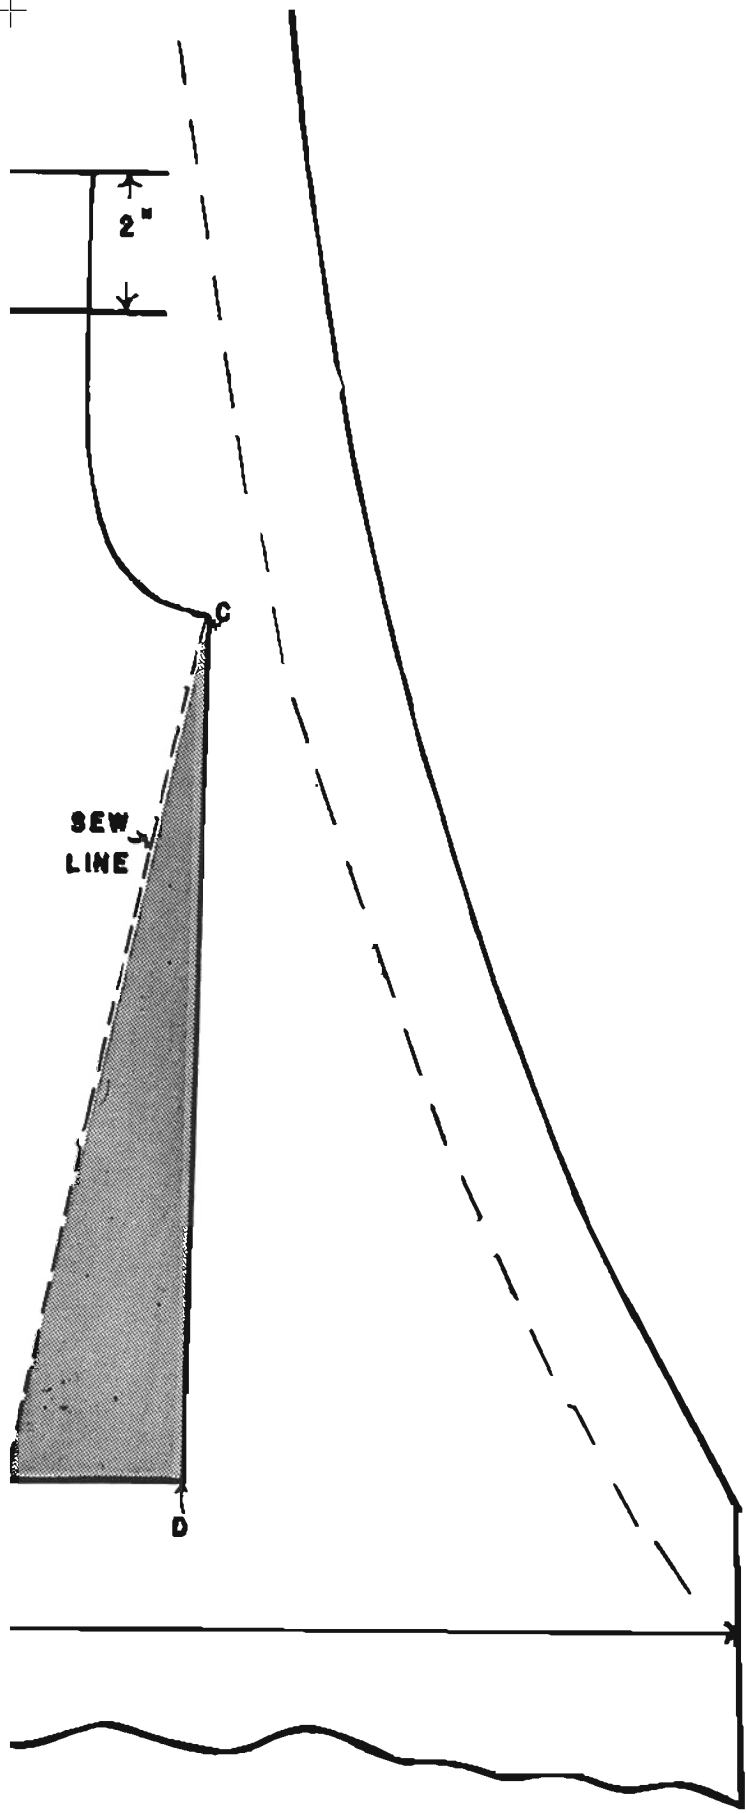




Use Saddle Stitch

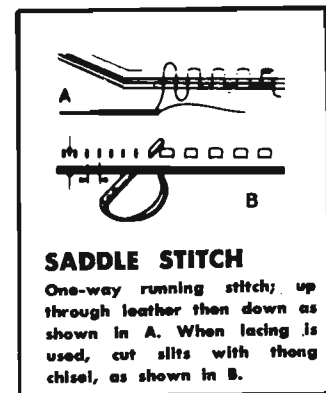

SADDLE STITCH
One-way running stitch, up through leather then down as shown in A. When lacing is used, cut slits with thong chisel, as shown in B.


HOW TO MARK AND PUNCH Stitching Holes




1. Mark guide lines for stitching holes with edge creaser or leather compass.



2. When edge creaser can't be used, mark guide line with tracer and steel square.



3. Mark evenly spaced stitching holes with spacing wheel or overstitch wheel.



4. Punch stitching holes in heavy leather with awl and mallet, on hardwood board.



5. Pierce stitching holes in light leather with scratch awl.

VEST


1. One front pattern and half of back pattern are illustrated. (The pattern shown is a size 34 regular. 34 regular is for a boy approximately 14 years of age.)
2. Place center fold edge of back pattern to folded paper. Cut double — unfold paper — and you will have your complete back pattern.
3. Pin paper pattern together and adjust to size. Vest should fit loosely.
4. Now pin paper pattern to leather and cut accordingly.
5. Dotted lines indicate 1/4" seam at shoulders and sides.
6. Sew or stitch together at shoulders and sides.
7. If desired — fold binding material over all edges and sew or stitch on.
8. Decorate as indicated (use Dri mark pens) or as desired.

Make Ties For Vest


Cut 4 strips of leather approx. 1/4" x 6". Make two small slits in vest where position is marked. Then cut slits in strips and make bleed knots as illustrated below.

HOW TO MAKE BLEED KNOT


STEP 1

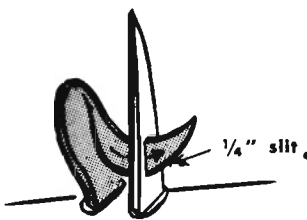


STEP 2

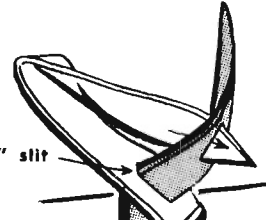

STEP 3

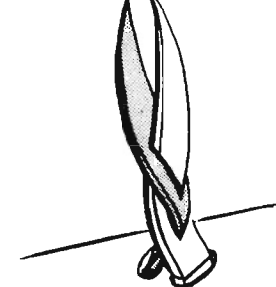

PULL BLEED KNOT TIGHT

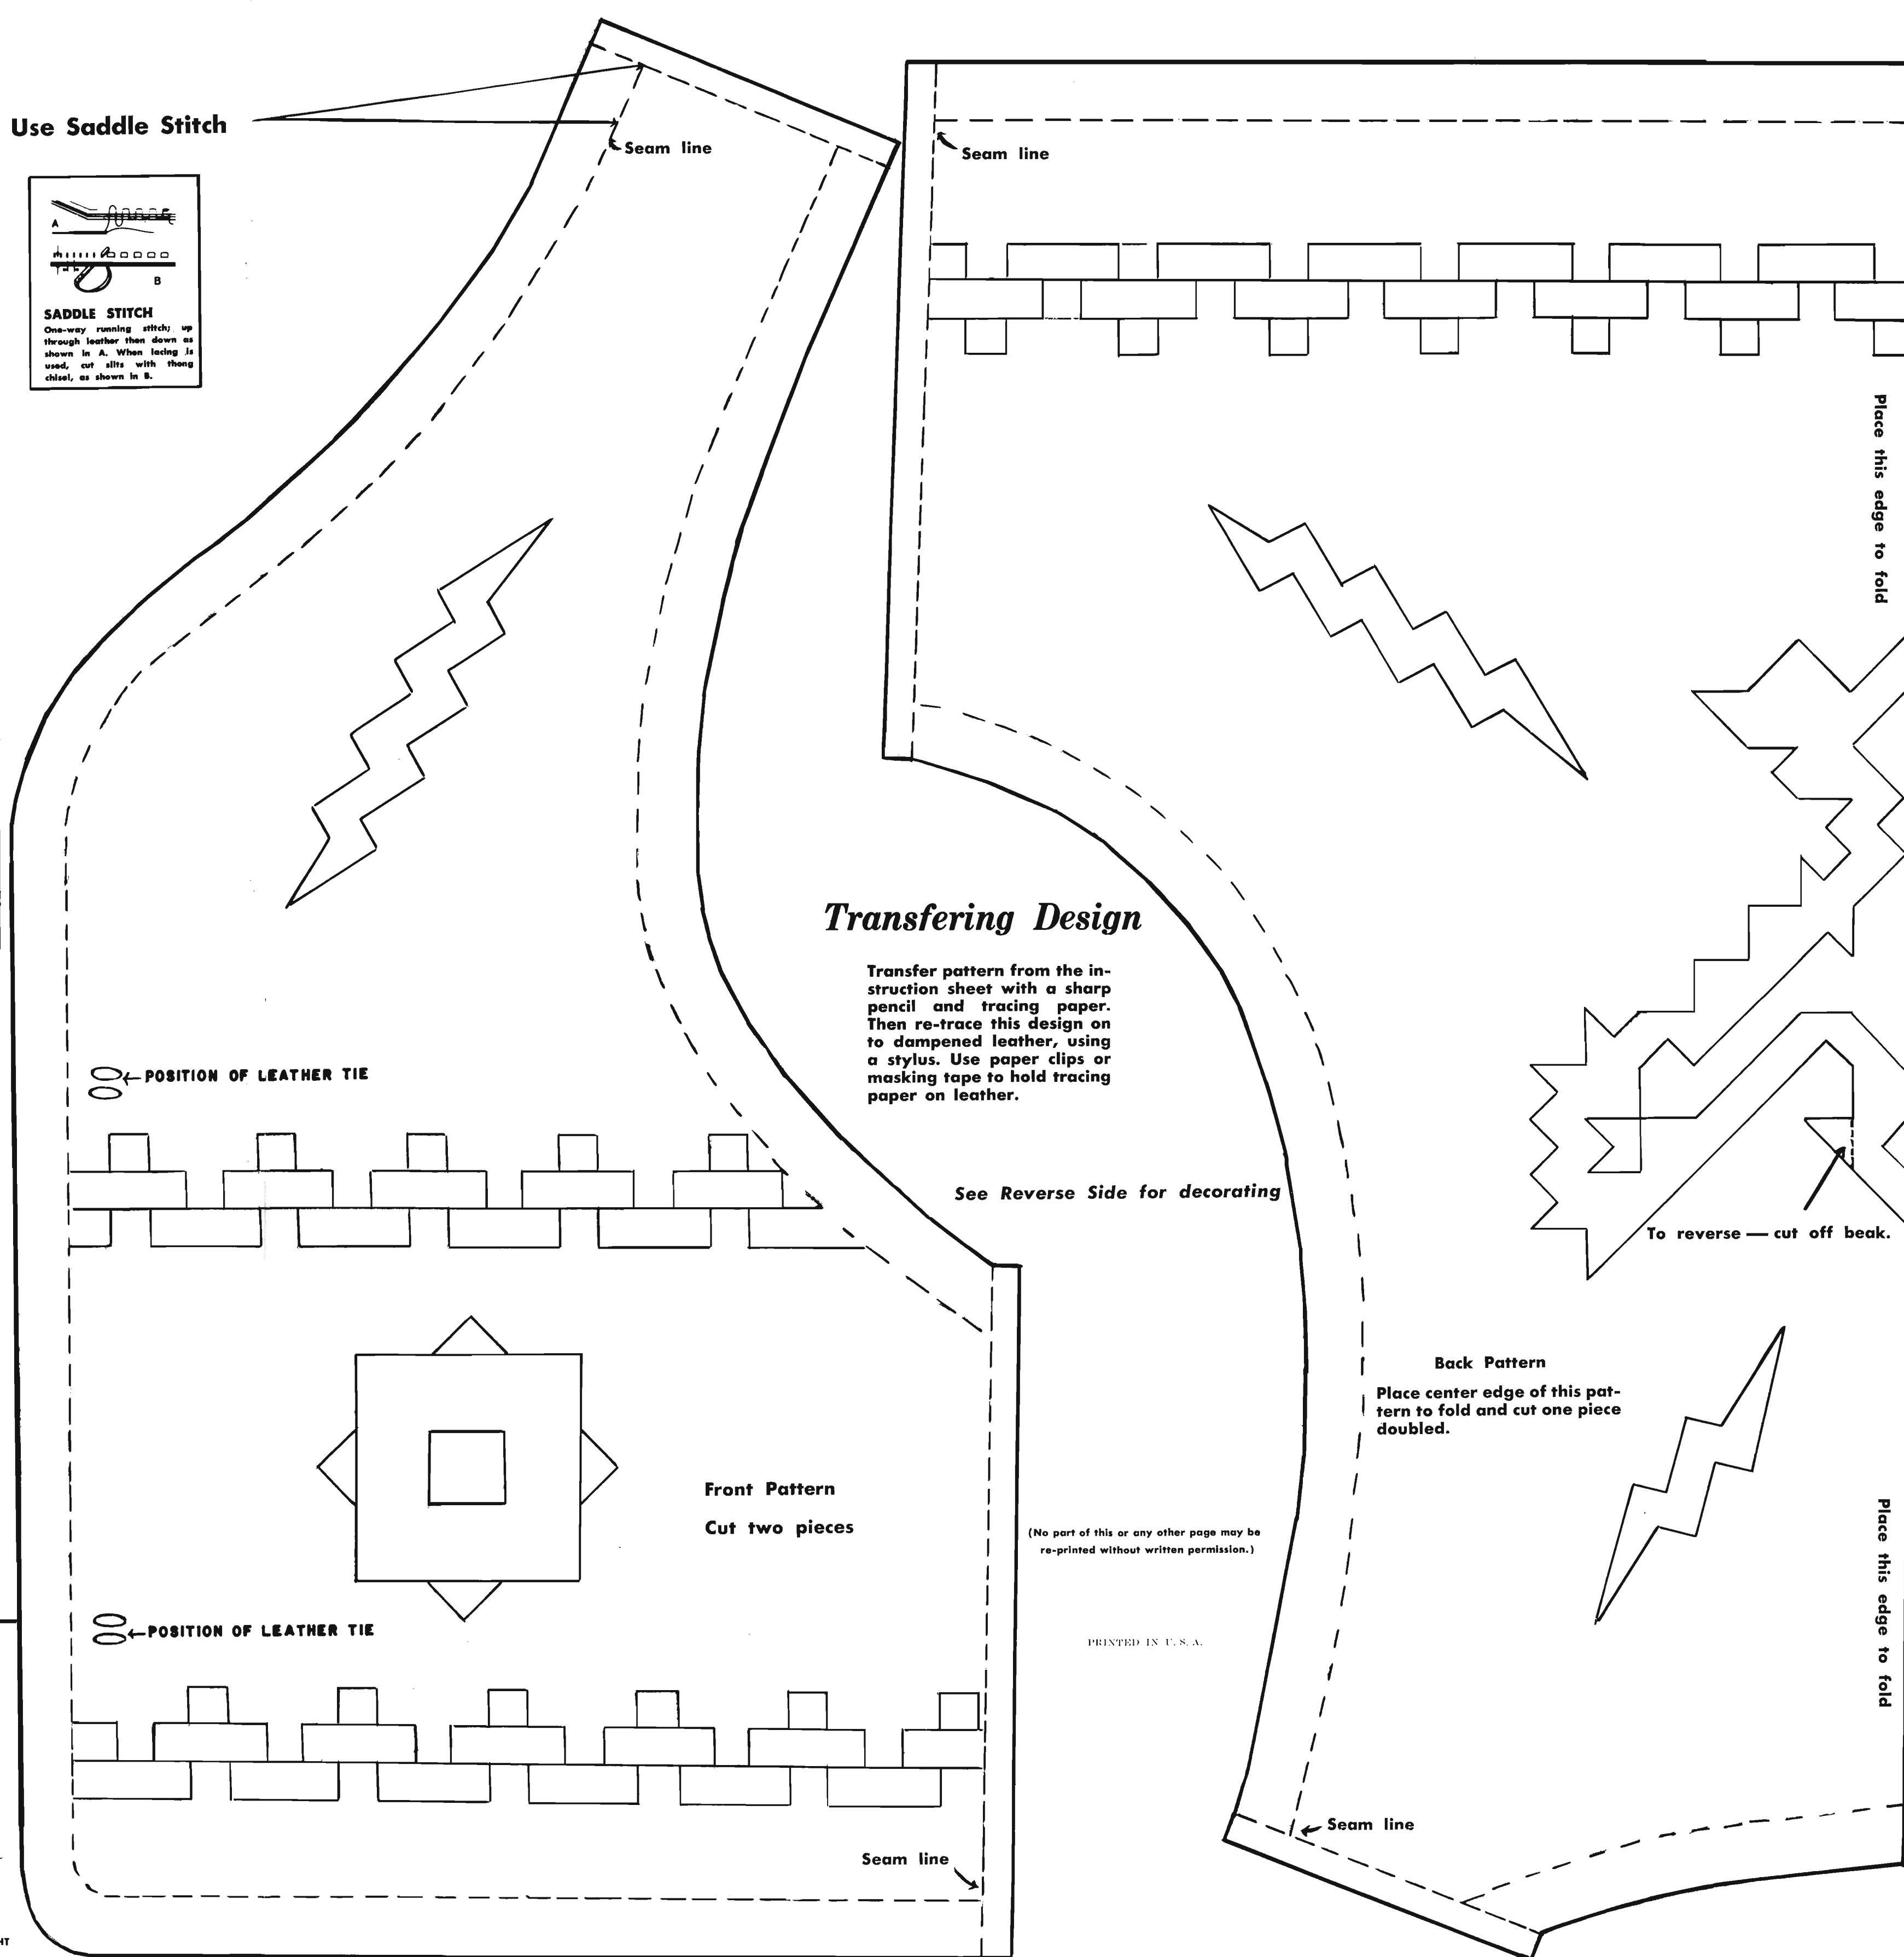

Transferring Design

Transfer pattern from the instruction sheet with a sharp pencil and tracing paper. Then re-trace this design on to dampened leather, using a stylus. Use paper clips or masking tape to hold tracing paper on leather.

See Reverse Side for decorating

Front Pattern
Cut two pieces

Back Pattern
Place center edge of this pattern to fold and cut one piece doubled.

(No part of this or any other page may be re-printed without written permission.)

PRINTED IN U.S.A.

Place this edge to fold

To reverse — cut off beak.

Place this edge to fold




HOW TO MARK AND PUNCH STITCHING HOLES




1. Mark guide lines for stitching holes with edge creaser or leather compass.



2. When used, use a tracing tool.




3. Mark evenly spaced stitching holes with spacing wheel or overstretch wheel.



4. Punch stitching holes in heavy leather with awl and mallet, on hardwood board.

Use Saddle Stitch

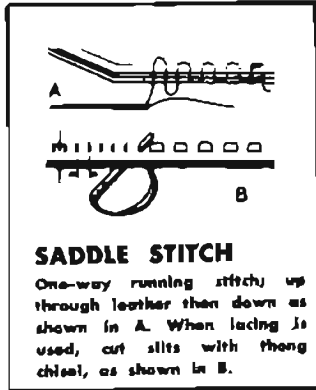


Marking Holes




edge creaser can't be mark guide line with and steel square.



5. Pierce stitching holes in light leather with scratch awl.

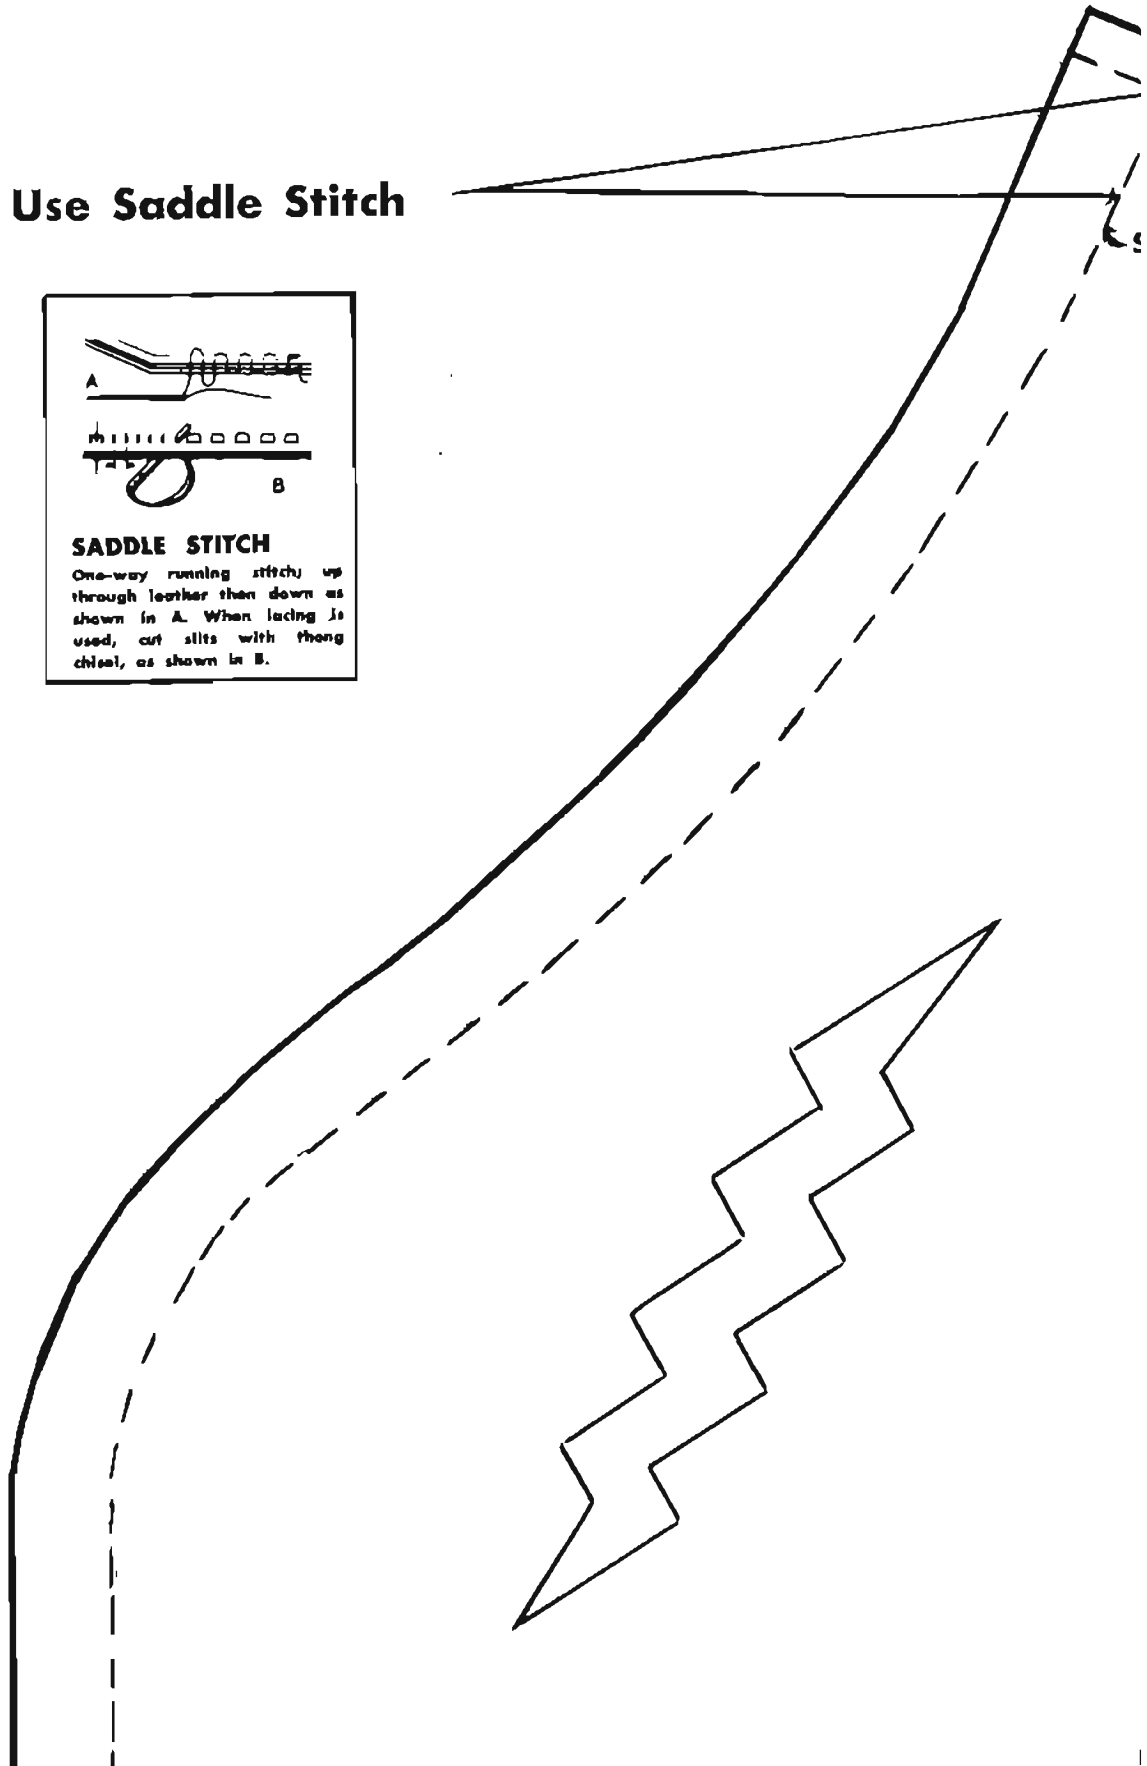

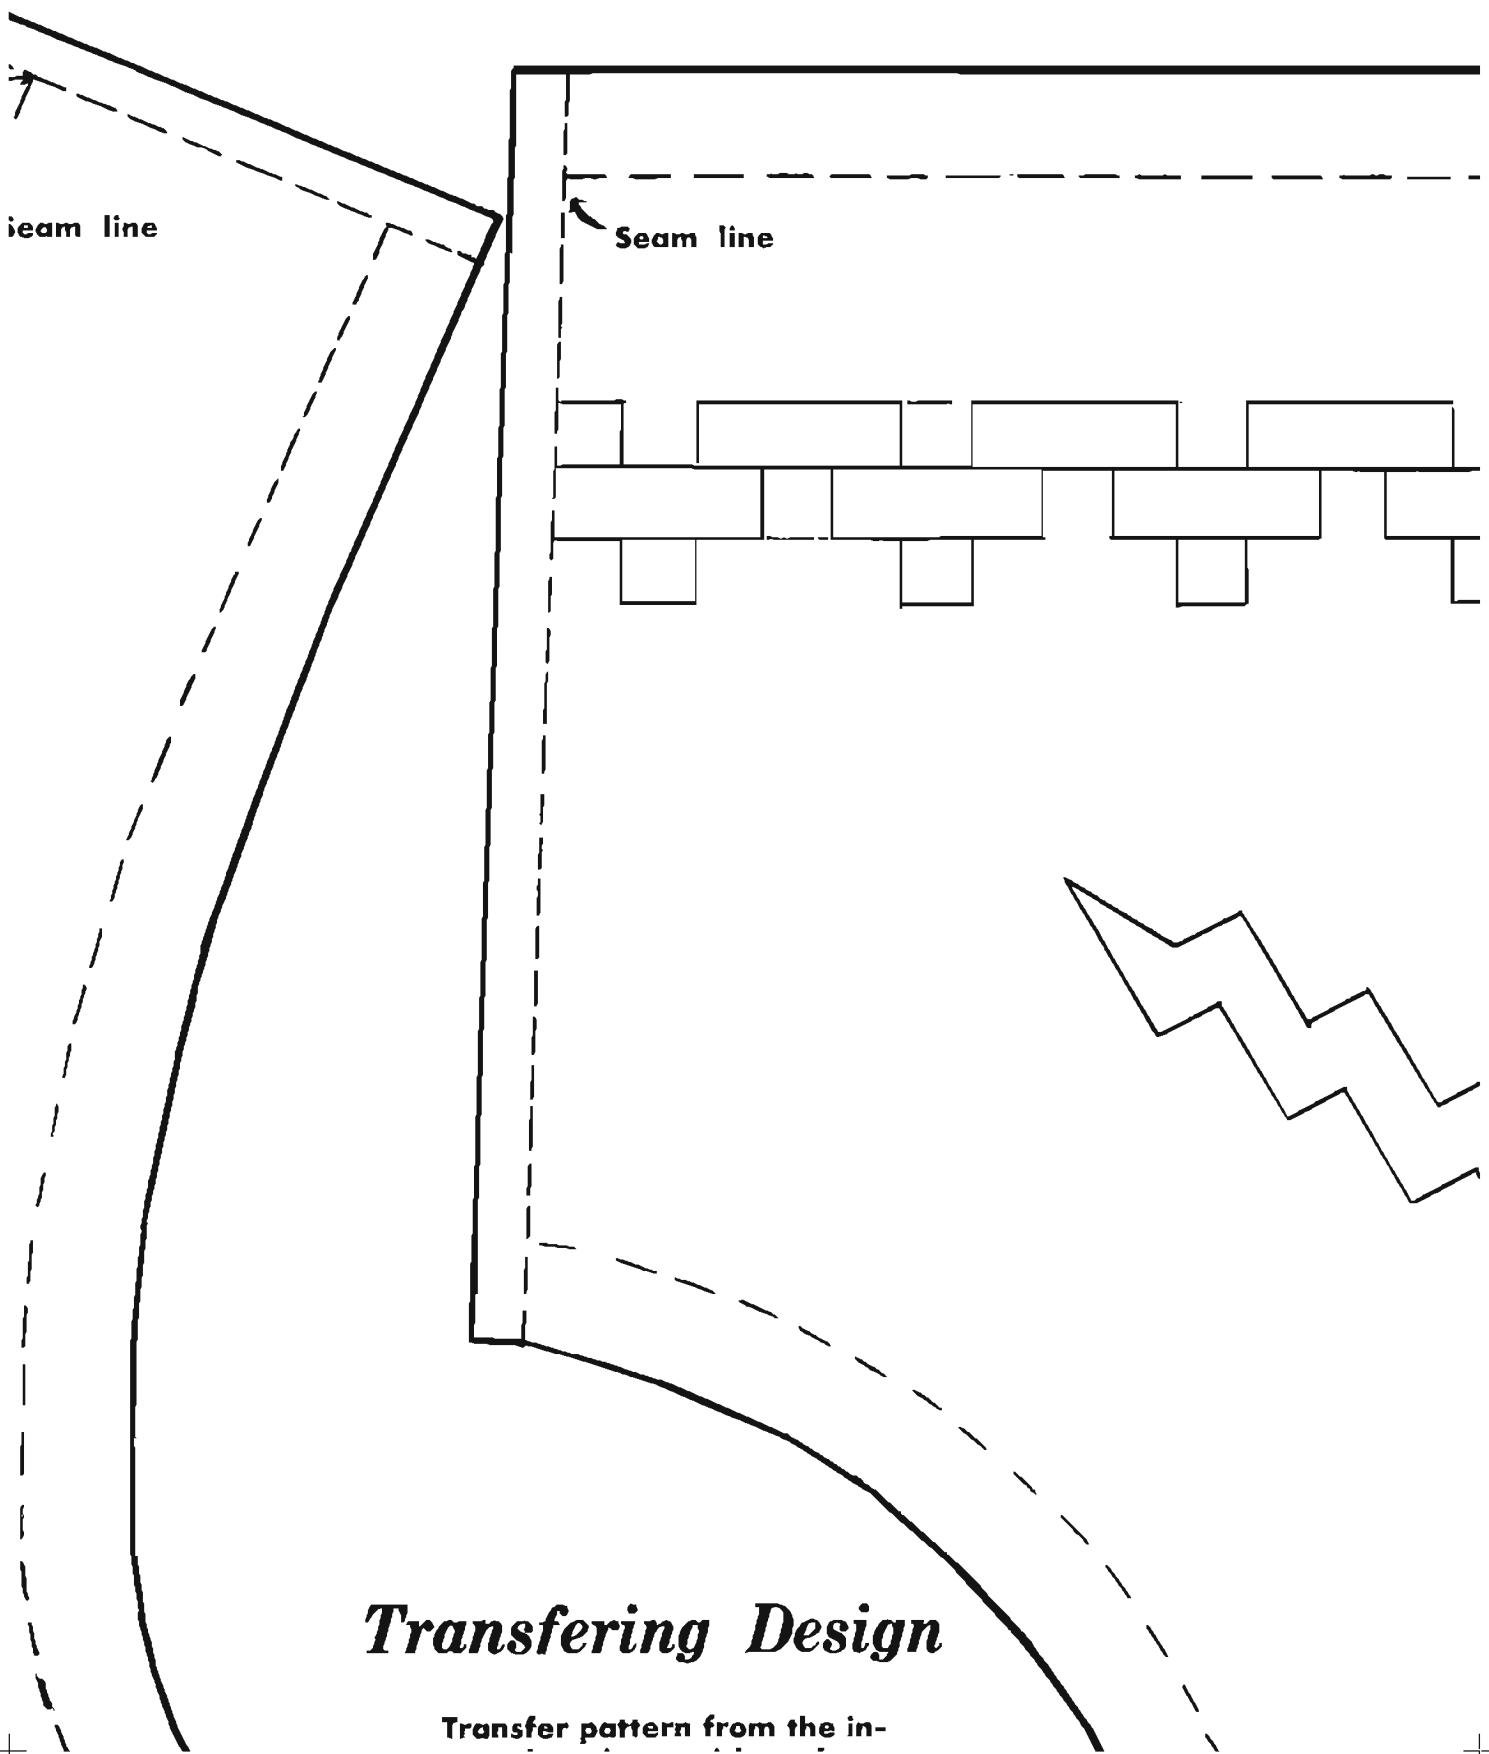


Seam line

Seam line

Transferring Design

Transfer pattern from the in-

Place this edge to fold

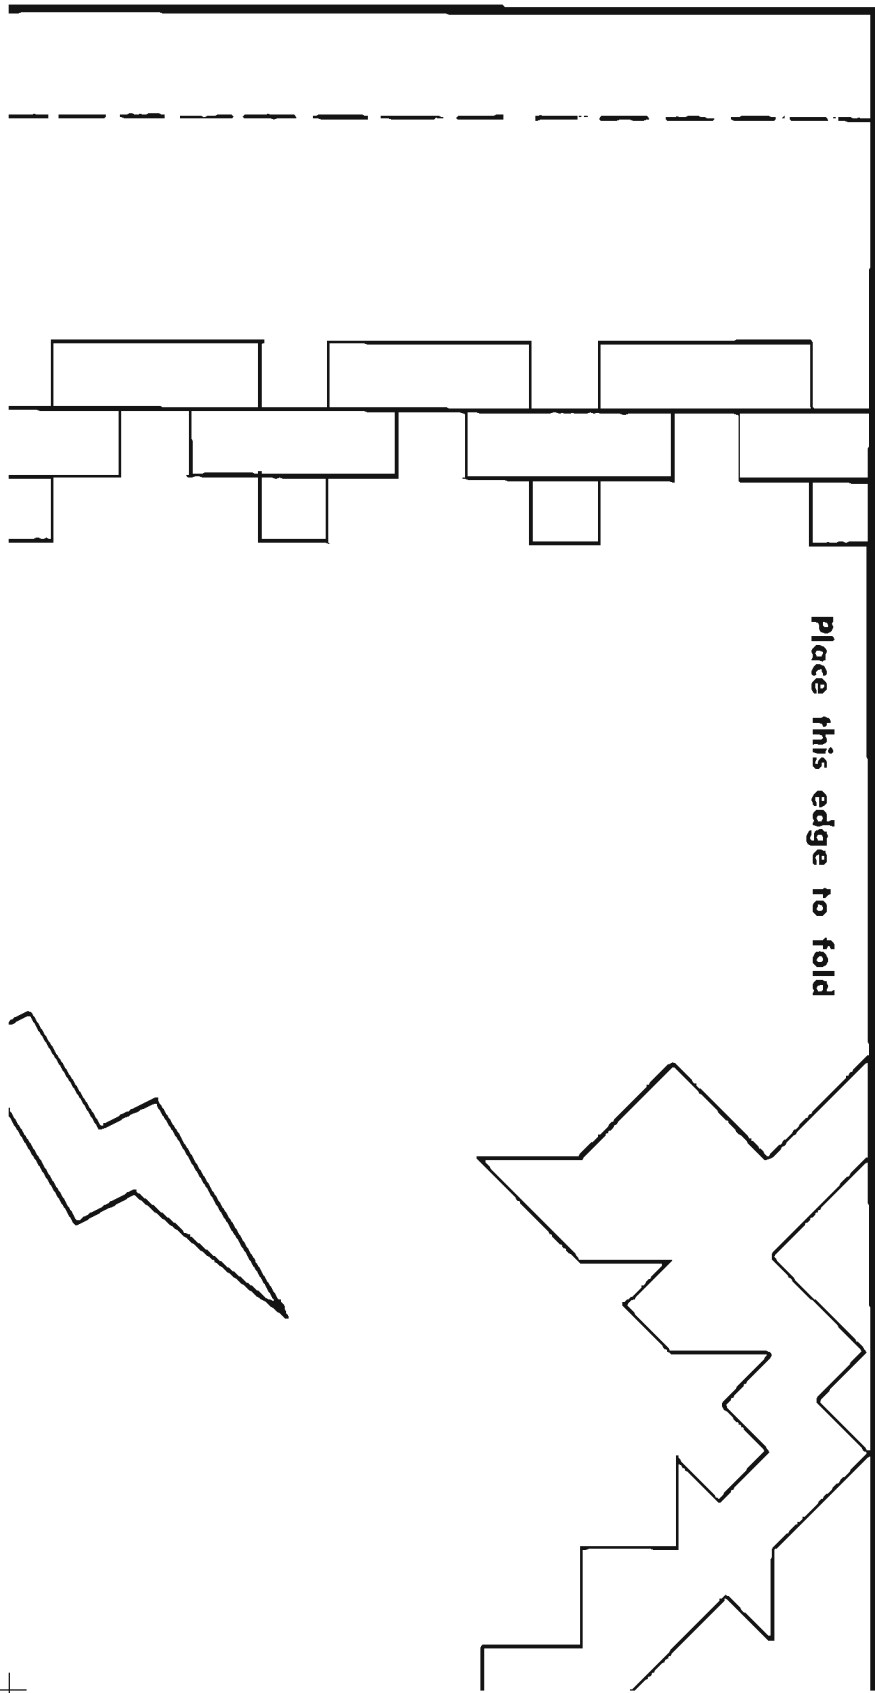

VEST


1. One front pattern and half of back illustrated. (The pattern shown is a regular. 34 regular is for a boy approximately 10 years of age.)
2. Place center fold edge of back pattern paper. Cut double — unfold paper — you have your complete back pattern.
3. Pin paper pattern together and make Vest should fit loosely.
4. Now pin paper pattern to leather accordingly.
5. Dotted lines indicate $\frac{1}{4}$ " seam at side.
6. Sew or stitch together at shoulder.
7. If desired — fold binding material edges and sew or stitch on.
8. Decorate as indicated (use Dri Mart as desired).

Make Ties For Vest


Cut 4 strips of leather approx. $\frac{1}{4}$ " wide. Cut two small slits in vest where position of ties indicated. Then cut slits in strips and make bows as illustrated below.

HOW TO MAKE BLEED KNOT

STEP 1

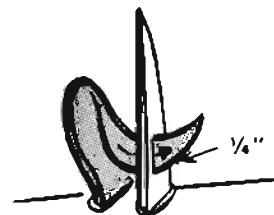

STEP 2

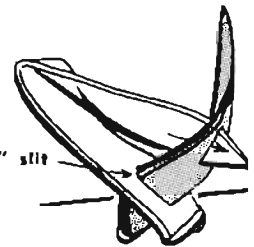

pattern are
size 34 reg-
ximately 14

rn to folded
and you will

ljust to size.

her and cut

oulders and


rs and sides.

ial over all

ark pens) or



" x 6". Make
on is marked.
lead knots as

STEP 3




PULL BLEED KNOT TIGHT

 ← **POSITION OF LEATHER TIE**

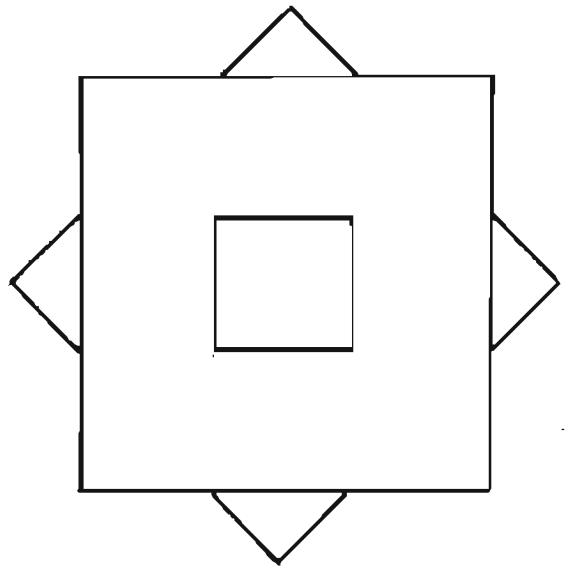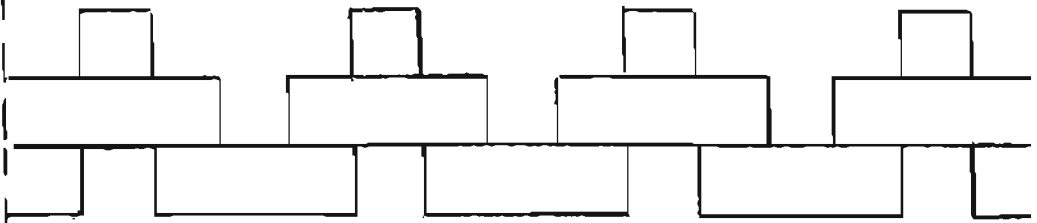

 ← **POSITION OF LEATHER TIE**

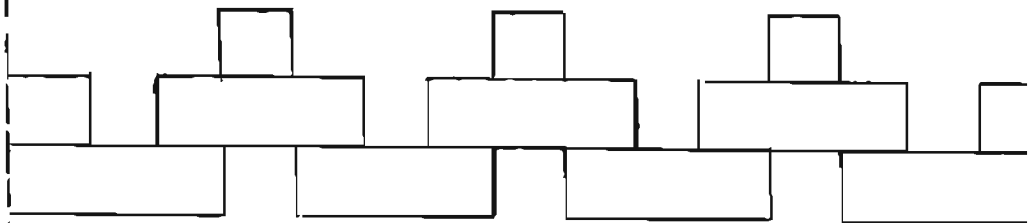

struction sheet with a sharp pencil and tracing paper. Then re-trace this design on to dampened leather, using a stylus. Use paper clips or masking tape to hold tracing paper on leather.

See Reverse Side for decorating

Front Pattern

Cut two pieces



(No part of this or any other page may be re-printed without written permission.)


PRINTED IN U.S.A.

**Place
tern to
double**

Seam line

Seam line

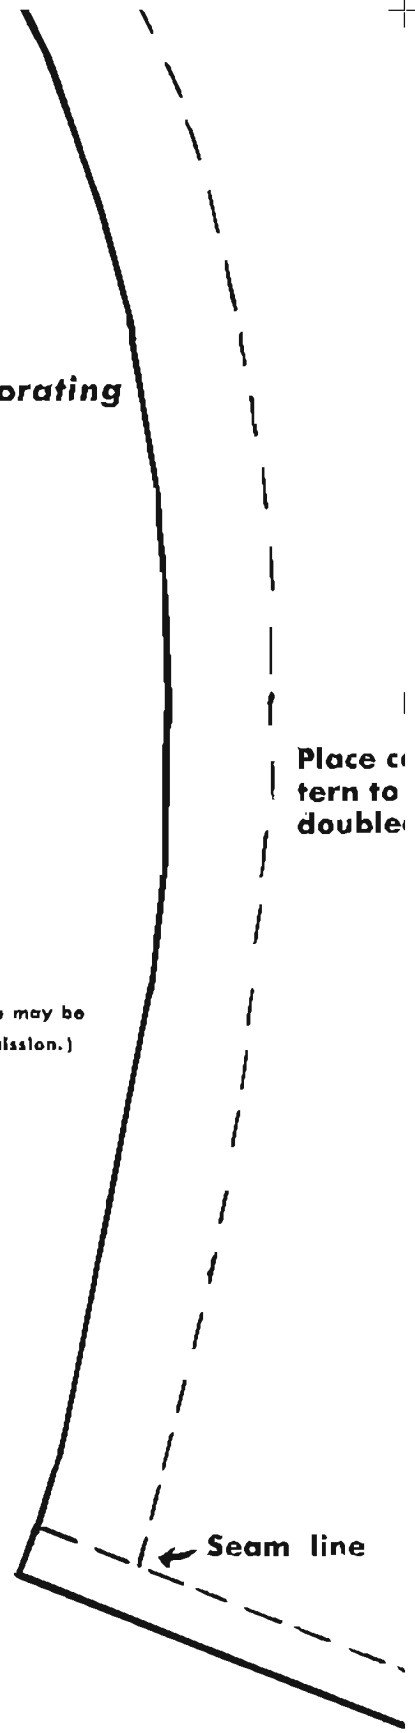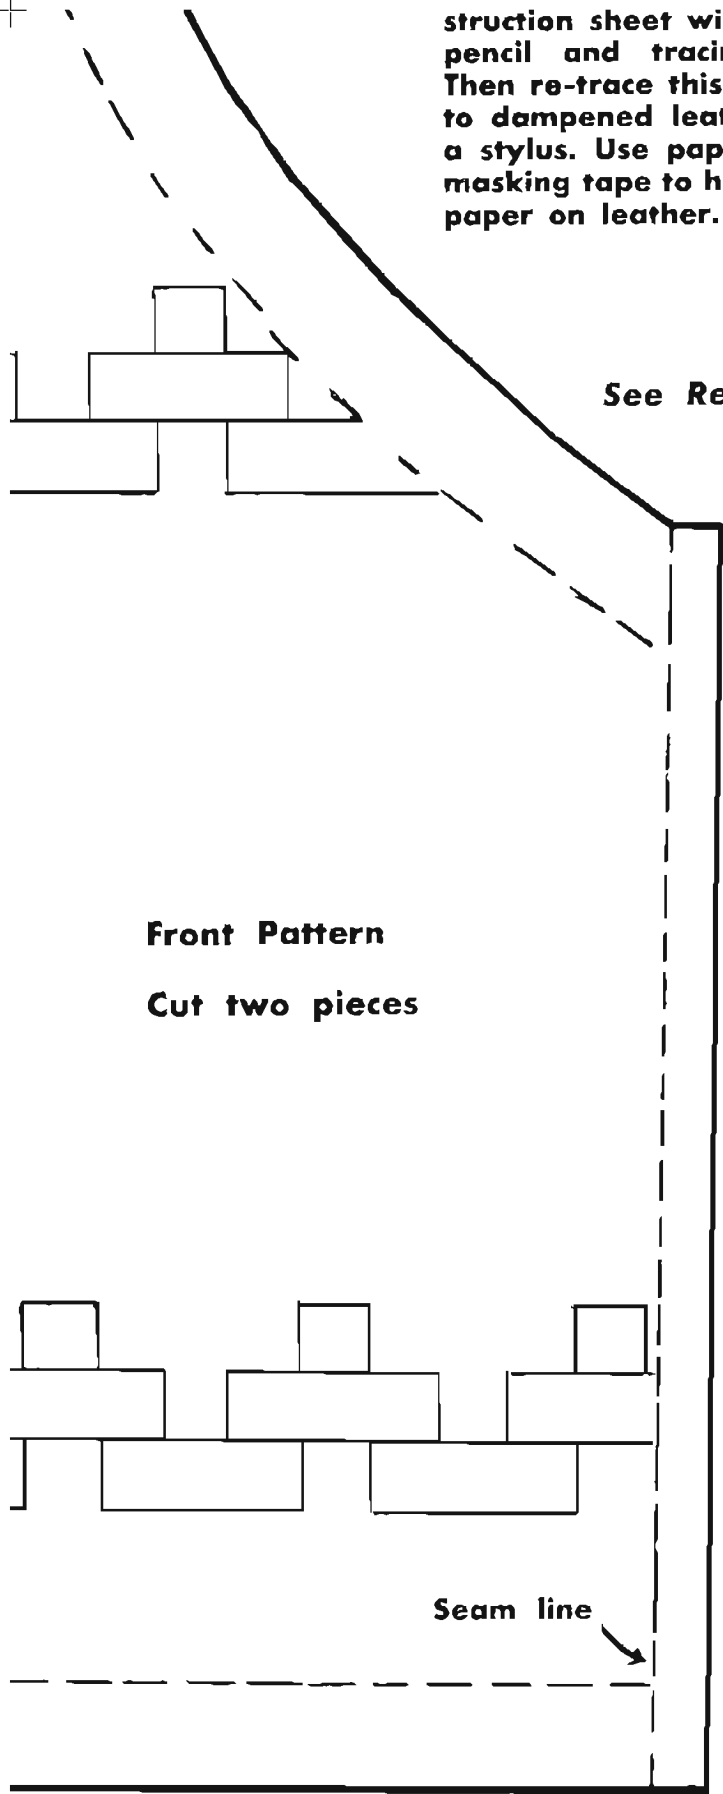


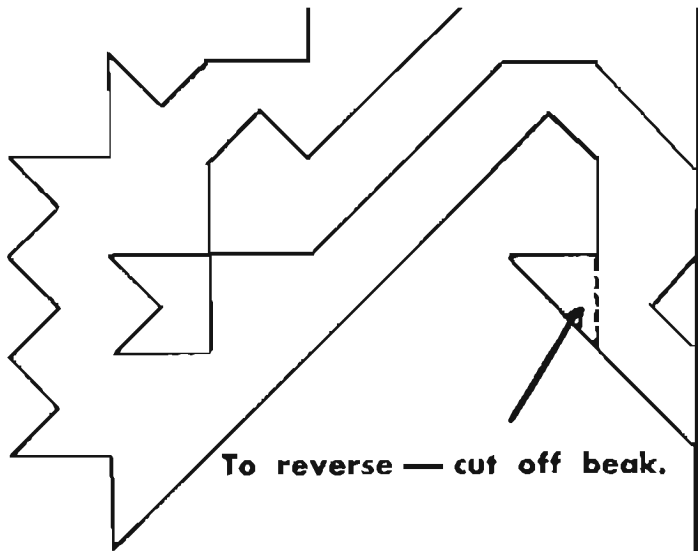

To reverse — cut off beak.

Back Pattern

enter edge of this pat-
fold and cut one piece
d.

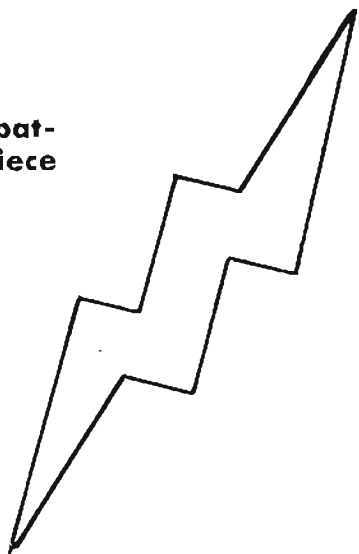

Place this edge to fold

