


Project Name

Qty

Type

Catalog / Part Number

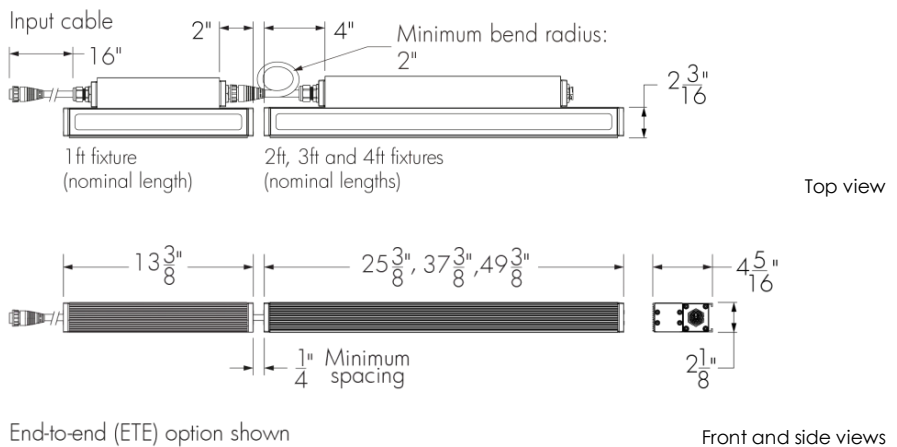


Photometric Summary

	Delivered output (lm)	Intensity (peak cd)
WW	3,592	5,159
8°x8°	4,045	77,896
10°x10°	3,830	38,346
10°x30°	3,885	30,056
10°x60°	3,984	17,736
10°x90°	3,576	7,897
15°x25°	3,880	24,730
30°x30°	3,765	14,726
30°x60°	3,848	5,106
35°x35°	3,921	9,999
50°x80°	3,767	3,449
60°x60°	3,435	3,007
80°x80°	3,881	2,530
90°x90°	3,588	1,886

Based on HO 4000K, 4ft [1219mm] configuration.  
Photometric performance is measured in compliance with IESNA LM-79-08.

Optics

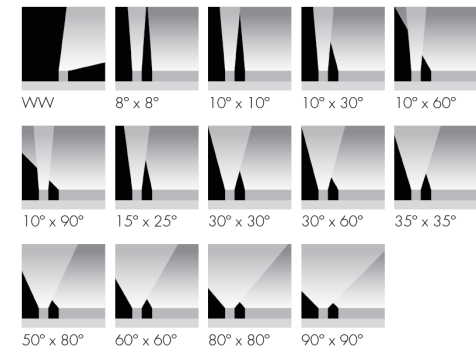


Description

The Lumenfacade Horizontal is a linear, high-performance, LED projector with a slim, 2 in profile that makes it easy to conceal and integrate into architectural facades. The design repositions the driver chamber out of view, reducing the height of the luminaire and concealing wiring and mounting details. Featuring second generation LED technology, the luminaire is available in 12 in, 24 in, 36 in or 48 in sections, and can be configured with a number of options such as: optics for grazing or flood lighting; a choice of outputs (ASHRAE 5 W/ft, RO 8.5 W/ft or HO 15.25 W/ft); various color temperatures or static colors; various mounting options, finishes, accessories and controls. A unique asymmetric wallwash distribution is also available, providing exceptional uniformity and brightness for walls and signage.

Features

Color and Color Temperature	2200K, 2700K, 3000K, 3500K, 4000K, Red, Green, Blue
Length (nominal)	12 in, 24 in, 36 in, 48 in
Optics	Asymmetric wallwash, 8° x 8°, 10° x 10°, 10° x 30°, 10° x 60°, 10° x 90°, 15° x 25°, 30° x 30°, 30° x 60°, 35° x 35°, 50° x 80°, 60° x 60°, 80° x 80°, 90° x 90°
Options	End-to-end configuration (factory installed 16 in black input cable included), Corrosion-resistant coating for hostile environments, 3G ANSI C136.31-2010 Vibration Rating for bridge applications, CE (certification covers European Economic Area)
Power Consumption	5 W/ft (meets ASHRAE standards for linear lighting on building facades - not available for 12 in fixture lengths), 8.5 W/ft (RO version), 15.25 W/ft (HO version), Typically 20% higher for 12 in fixture lengths
Warranty	5-year limited warranty
Performance	
Illuminance at Distance	Minimum 1 fc at 133 ft (HO 4000K, 48 in fixture, 10° x 60°, DMX/RDM)

**Colors and Color Temperatures****Controls**

ON/OFF 0-10V DALI

**Ratings**

IP66 IK07\*

\* asymmetric wallwash lens is IK06 rated

**Certifications**

<b>Color Consistency</b>	2 SDCM, 3 SDCM (2200K)
<b>Color Rendering</b>	Minimum CRI 80
<b>Lumen Maintenance</b>	L70 280,000 hrs, L95 35,000 hrs

**Physical**

<b>Housing Material</b>	Low copper content extruded aluminum
<b>Lens Material</b>	Clear tempered glass
<b>Hardware Material</b>	Stainless steel
<b>End Cap Material</b>	Machined aluminum
<b>Gasket Material</b>	Silicone
<b>Surface Finish</b>	Electrostatically applied polyester powder coat
<b>Weight</b>	12 in: 4.5 lbs, 24 in: 7 lbs, 36 in: 10.5 lbs, 48 in: 14 lbs

**Electrical and control**

<b>Voltage</b>	100 to 277 volts, 347 volts available (consult factory for details)
<b>Fixture Cable</b>	Power and data in one cable, End-to-end option (ETE): 16 in black input cable (no jumper cable needed for minimum spacing between two fixtures)
<b>Leader Cable Conductor</b>	5C #16-5
<b>Maximum Cable and Fixture Run Length</b>	252 ft (On/Off, 277V, RO version), 164 ft (On/Off, 277V, HO version)
<b>Control</b>	On/Off control, Lumentalk, 0-10V dimming, DALI dimming, Lutron® EcoSystem® Enabled dimming, DMX/RDM enabled
<b>Resolution (DMX/RDM)</b>	Per foot or per fixture (configured with LumenID V3 software), 8-bit or 16-bit

**Environmental**

<b>Storage Temperature</b>	-40 °F to 185 °F (device must reach start-up temperature value before operating)
<b>Start-up Temperature</b>	-13 °F to 122 °F
<b>Operating Temperature</b>	-40 °F to 122 °F
<b>Ingress Protection Rating</b>	IP66, Wet location rated
<b>Impact Resistance Rating</b>	IK07 (asymmetric wallwash lens is IK06 rated)

**Accessories (order separately)**



<b>Optical Accessories</b>	Lumenfacade Horizontal Radial Louver
<b>Cables</b>	Leader cable (standard), Jumper cable (standard), Leader cable (ETE), Jumper cable (ETE)
<b>Control Boxes</b>	DMX/RDM enabled (daisy chain or star configuration), Ethernet enabled (daisy chain or star configuration), Lumentalk Data Bridge
<b>Control Systems</b>	Lumentone™ 2 (LTN2), Pharos® kit (PHAROS)
<b>Diagnostic and Addressing Tools</b>	LumenID (LID), LumentalkID

Chromaticity Data

TM-30 - 4000K

Spectral Power Distribution



CCT	CIE		TM-30	
4000K	R <sub>a</sub>	83	85	R <sub>f</sub>
	R <sub>g</sub>	14	96	R <sub>g</sub>

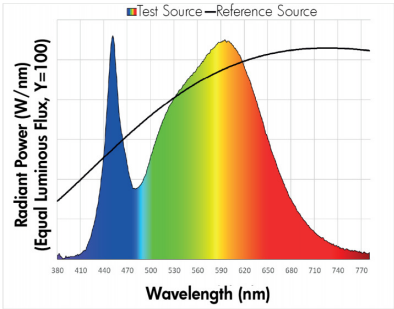

Asymmetric wallwash optic details

WW-LF - Asymmetric wallwash optic, left feeding side

WW-RF - Asymmetric wallwash optic, right feeding side

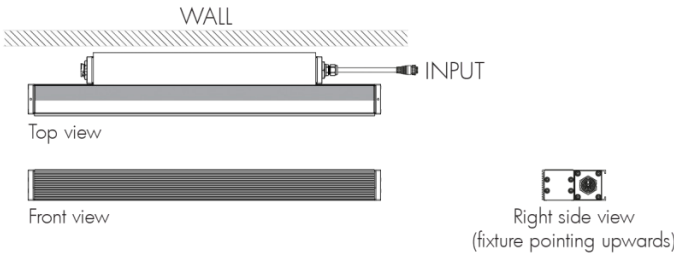
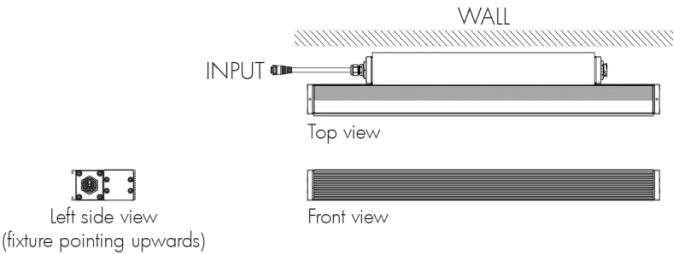


- Always position frosted side toward the wall.
- Fixture's feeding side is based on uplight installations. Feeding sides are reversed when fixture is used in a downlight application.
- Recommended setback from wall is 1/10 of the wall height. Example: 2 ft setback for a 20 ft wall.

Feeding side

LF - Left Feeding Side


RF - Right Feeding Side

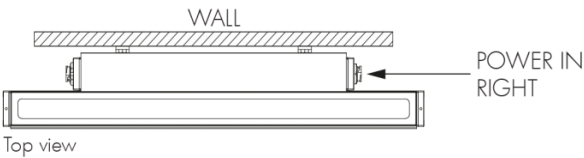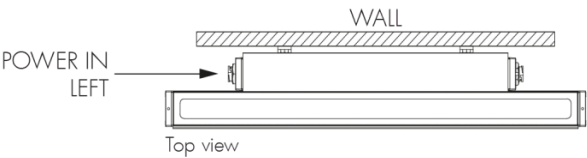


Fixture's feeding side is based on uplight installations. Feeding sides are reversed when fixture is used in a downlight application.

Mounting options


UMP - Fixed Mounting




UMP - Mounting hole pattern

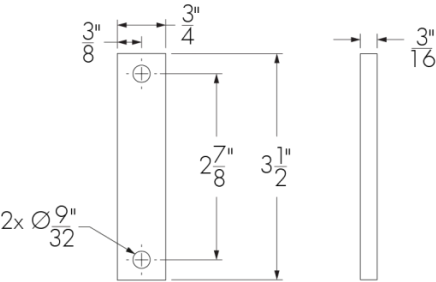


UMAS - Universal Adjustable Mounting




UMAS - Mounting hole pattern




WAMH6 - Adjustable Extended Arm Mounting 6 in Horizontal version




WAMH6 - Mounting hole pattern




WAMH12 - Adjustable Extended Arm Mounting 12 in Horizontal version




WAMH12 - Mounting hole pattern




WAMH18 - Adjustable Extended Arm Mounting 18 in Horizontal version

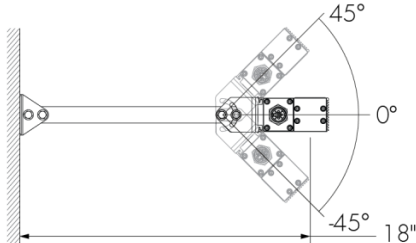

WAMH18 - Mounting hole pattern



End-to-end configuration option (ETE)

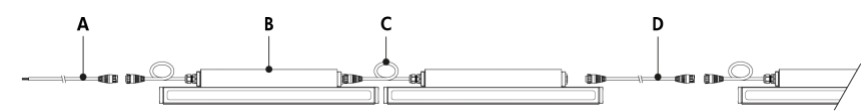


A - ETE leader cable (order separately)  
B - Lumenfacade Horizontal with ETE option  
C - ETE 16 in black input cable (minimum bend radius: 2 in)  
D - ETE jumper cable (order separately)

Includes a factory installed 16 in black input cable. A jumper cable is not required for minimum spacing between two end-to-end (ETE) fixtures. An ETE jumper cable is required only if a longer distance between two adjacent ETE fixtures is needed, or to connect two continuous runs of ETE fixtures together.

Optical accessories (order separately)

LOGHRD - Radial louver for Lumenfacade Horizontal

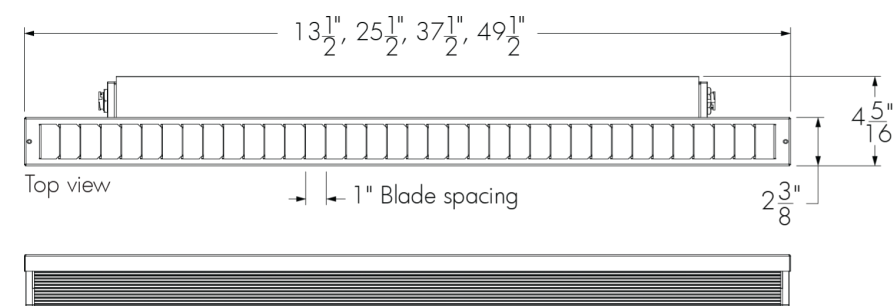

Top view


Front view

13<sup>1</sup>/<sub>2</sub>", 25<sup>1</sup>/<sub>2</sub>", 37<sup>1</sup>/<sub>2</sub>", 49<sup>1</sup>/<sub>2</sub>"

4<sup>5</sup>/<sub>16</sub>"

2<sup>3</sup>/<sub>8</sub>"

1" Blade spacing

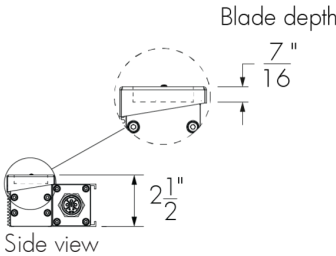

Blade depth

7<sup>1</sup>/<sub>16</sub>"

2<sup>1</sup>/<sub>2</sub>"



Side view

LOGHRD-LENGTH-FINISH-OPTIONS



- Please specify:
- LENGTH:** 12 in, 24 in, 36 in or 48 in; **FINISH:** BK - Black Sandtex®, BRZ - Bronze Sandtex®, SI - Silver Sandtex®, WH - Smooth white or CC - custom color and finish (please specify RAL color); **OPTIONS:** CRC - Corrosion-resistant coating for hostile environments
- The addition of a louver will affect beam distribution. Consult factory for application support.
  - Not suitable for asymmetric wallwash optic.
  - Two mounting screws included.

EPA Guide

Fixture

	LOGH 12 in	LOGH 24 in	LOGH 36 in	LOGH 48 in
EPA front (sq ft) 	0.215	0.427	0.639	0.860
EPA side (sq ft) 	0.045	0.046	0.050	0.053

Fixture with radial louver accessory

	LOGH 12 in	LOGH 24 in	LOGH 36 in	LOGH 48 in
EPA front (sq ft) 	0.262	0.543	0.819	1.100
EPA side (sq ft) 	0.058	0.062	0.067	0.068

## Cables (order separately)

### LOGLC - Leader cable for Lumenfacade



Standard construction

LOGLC-CERTIFICATION-STD-LENGTH-CABLE COLOR



End-to-end (ETE) option

LOGLC-CERTIFICATION-ETE-LENGTH-CABLE COLOR

Please specify:

**CERTIFICATION:** UL or CE; **LENGTH:** 10 ft, 25 ft, 50 ft, 100 ft, 150 ft or 200 ft; **CABLE COLOR:** black or white (connectors are black as standard; ETE fixture input cables are black as standard)

- Suitable for dimming/data and non-dimming applications.
- Sealing end cap is mandatory for any unused connector. One (1) included with every leader cable.
- Consult Lumenfacade leader cable specification sheet for details.

### LOGJC - Jumper cable for Lumenfacade



Standard construction

LOGJC-CERTIFICATION-STD-LENGTH-CABLE COLOR



End-to-end (ETE) option

LOGJC-CERTIFICATION-ETE-LENGTH-CABLE COLOR


Please specify:

**CERTIFICATION:** UL or CE; **LENGTH:** 1 ft (available for ETE option only), 2 ft to 30 ft (available in 1 ft increments) or 50 ft; **CABLE COLOR:** black or white (connectors are black as standard; ETE fixture input cables are black as standard)

- Suitable for dimming/data and non-dimming applications.
- Consult Lumenfacade jumper cable specification sheet for details.


## Control boxes (order separately)

### CBX-DMX/RDM - DMX/RDM enabled (daisy chain or star configuration)

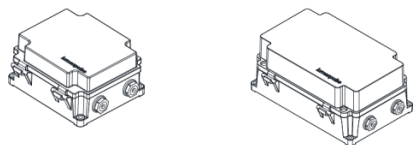


DMX/RDM control box. Up to six power and data outputs to fixtures or fixture runs. Consult CBX specification sheet and installation instructions for details. Lumenterminators provided with CBX (2x for daisy chain configuration, 6x for star configuration), consult factory to order spares.

### LDB - Lumentalk Data Bridge



Lumentalk Data Bridge, 0-10V or DMX output. Consult LDB specification sheet for details.

### CBX-ENET - Ethernet enabled (daisy chain or star configuration)

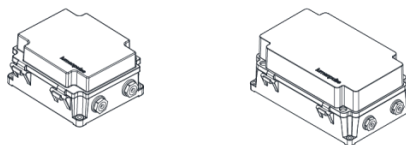

Ethernet control box. Up to four power and data outputs to fixture or fixture runs. Consult Ethernet CBX specification sheet and installation instructions for details.

## Control systems (order separately)

### LTN2 - Lumentone™ 2



Lumentone 2 is a simple pre-programmed DMX 512 controller with a push button rotary dial and live feedback.

### PHAROS - Pharos® kit



The Pharos kit, available for 1 or 2 DMX universes, allows for complete control of large lighting installations. 2 DMX universes kit shown.

## Diagnostic and addressing tools (order separately)

### LID - LumenID



LumenID is a diagnostic and addressing DMX/RDM tool. It must be specified on all DMX applications. Consult LID specification sheet for details.


### LID-LT - LumentalkID




LumentalkID is a diagnostic and addressing tool. It must be specified for all Lumentalk (LT) applications. Consult LID-LT specification sheet for details.

Resolution details

DMX/RDM control, resolution per foot: each 12 in section is addressed independently  
DMX addresses:

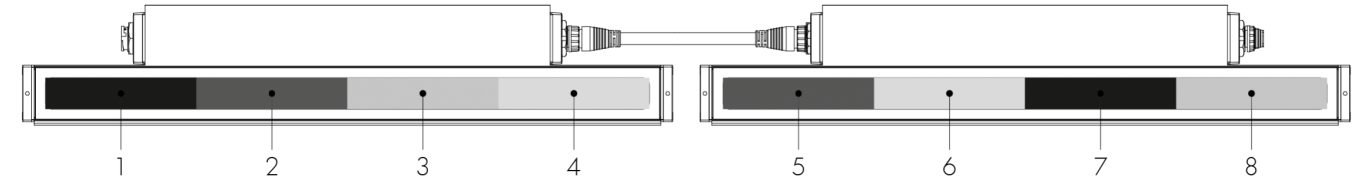

DMX/RDM control, resolution per fixture: each fixture is addressed independently  
DMX addresses:

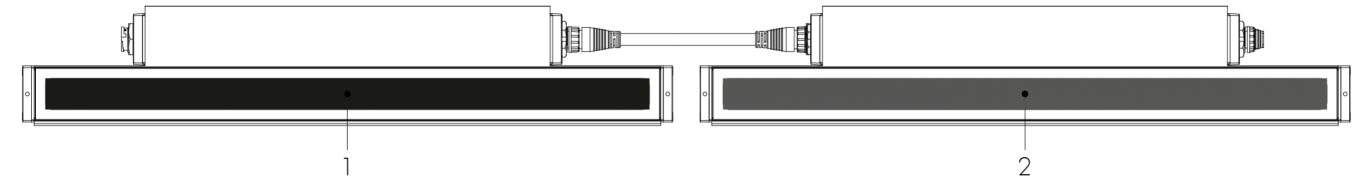


- 48 in fixtures shown.
- Applicable for DMX/RDM control option only. Fixture resolution can be configured on-site within the LumenID V3 software. A DMX/RDM enabled CBX is required.

Typical wiring diagrams

Wiring color code


UL Color Code	USE
Green	Ground
Black	Line
White	Line/Neutral
Red or Purple	0-10V / Data +
Orange	0-10V / Data -

On/Off Control (NO)



- A - Power input (100-277V, wiring by others)
- B - Junction box (by others)
- C - Leader cable (LOGLC)
- D - Jumper cable (LOGJC)
- E - Lumenfacade Horizontal
- F - Sealing end cap

On/Off Control (NO) - wiring detail

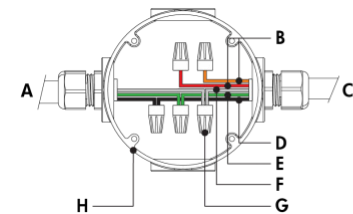


- A - Power input
- B - Not required
- C - To fixture
- D - Line
- E - Ground
- F - Line/Neutral
- G - Wire-nuts (by others)
- H - Junction box (by others)

- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- ASHRAE version (not available for 12 in fixture lengths): 5 W/ft; Regular Output version: 8.5 W/ft; High Output version: 15.25 W/ft.




## Lumentalk (LT)

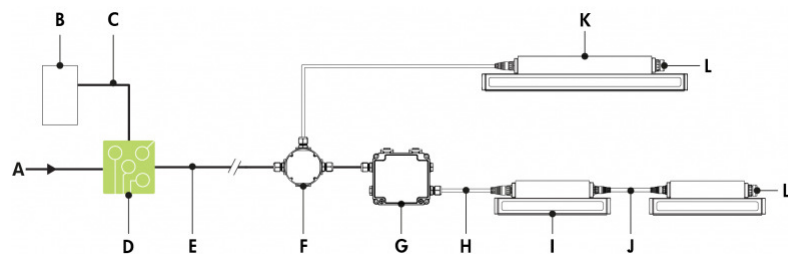

- A** - Power input (100-277V AC, wiring by others)
- B** - Dimmer/controller (order separately from Lumenpulse, or by others)
- C** - Data wiring (by others)
- D** - Lumentranslator 2 (LTL2-DIM, -DMX, -TRIAC, -DALI)
- E** - Power wiring (by others)
- F** - Junction box (by others)
- G** - Lumentalk Data Bridge (LDB-DIM or LDB-DMX)
- H** - Leader cable (LOGLC)
- I** - Lumenfacade Horizontal 12 in
- J** - Jumper cable (LOGJC)
- K** - Lumenfacade Horizontal (24 in, 36 in or 48 in fixture lengths)
- L** - Sealing end cap


## Lumentalk (LT) - wiring detail



- A** - Power input (control over power line via Lumentalk system)
- B** - To fixture
- C** - Not required
- D** - To Lumentalk Data Bridge (for run lengths with 12 in fixtures)
- E** - Line
- F** - Ground
- G** - Line/Neutral
- H** - Wire-nuts (by others)
- I** - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Lumentalk Data Bridge required for 12 in fixture lengths, see LDB installation instructions for details.
- For applications with all fixtures controlled as 1 zone: fixtures and Lumentalk Data Bridge must be specified as DIM. Maximum of 10 fixtures per LDB-DIM, consult factory for applications that require additional capabilities.
- For applications with fixtures controlled individually: fixtures and Lumentalk Data Bridge must be specified as DMX, 2-step commissioning process: 1 - DMX/RDM system using LumenID software and a LID, 2 - Lumentalk system using LumentalkID software and a LID-LT. Maximum of 32 fixtures per LDB-DMX. Consult factory for details.
- For DMX applications: 1 DMX controller per Lumentalk network, maximum of 48 DMX channels per Lumentalk network (minimum step transition update rate is 1 second, minimum fade time between two colors is 1 minute). Consult factory for applications that require additional capabilities.
- Maximum of 1 transmitter (Lumentranslator or Lumenlink) per system.
- No third party fixtures allowed on the same circuit.
- Consult factory for DALI Lumentalk applications.
- 1% minimum dimming value.
- ASHRAE version (not available for 12 in fixture lengths): 5 W/ft; Regular Output version: 8.5 W/ft; High Output version: 15.25 W/ft.

## 0-10V dimming (DIM)

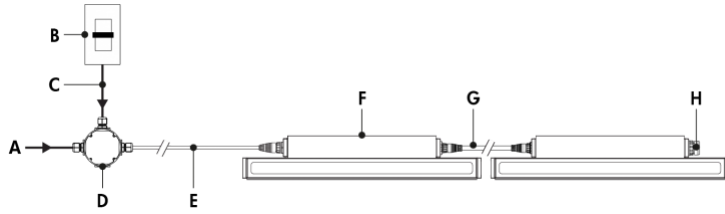

- A** - Power input (100-277V, wiring by others)
- B** - Dimmer (by others)
- C** - Data wiring (by others)
- D** - Junction box (by others)
- E** - Leader cable (LOGLC)
- F** - Lumenfacade Horizontal
- G** - Jumper cable (LOGJC)
- H** - Sealing end cap


## 0-10V dimming (DIM) - wiring detail



- A** - Power input
- B** - From dimmer (by others)
- C** - 0-10 V +
- D** - 0-10 V -
- E** - To fixture
- F** - Line
- G** - Ground
- H** - Neutral
- I** - Wire-nuts (by others)
- J** - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- 0-10V mA ratings: passive dimmer (Current Sink): 3 mA per fixture, active dimmer (Current Source): 0.5 mA per fixture.
- 1% minimum dimming value.
- ASHRAE version (not available for 12 in fixture lengths): 5 W/ft; Regular Output version: 8.5 W/ft; High Output version: 15.25 W/ft.

## DALI dimming (DALI)

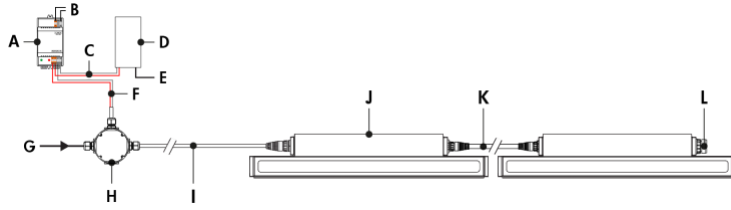

- A** - DALI bus power supply (by others)
- B** - Power input for DALI bus power supply (wiring by others)
- C** - Data output to DALI controller (wiring by others)
- D** - DALI controller (by others)
- E** - Power input for DALI controller (wiring by others)
- F** - Data output to fixture (wiring by others)
- G** - Power input (100-277V, wiring by others)
- H** - Junction box (by others)
- I** - Leader cable (LOGLC)
- J** - Lumenfacade Horizontal
- K** - Jumper cable (LOGJC)
- L** - Sealing end cap


## DALI dimming (DALI) - wiring detail



- A** - Power input
- B** - From DALI controller (by others)
- C** - DA +
- D** - DA -
- E** - To fixture
- F** - Line
- G** - Ground
- H** - Neutral
- I** - Wire-nuts (by others)
- J** - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Maximum of 64 DALI fixtures per DALI loop.
- 1% minimum dimming value.
- ASHRAE version (not available for 12 in fixture lengths): 5 W/ft; Regular Output version: 8.5 W/ft; High Output version: 15.25 W/ft.
- Commissioning may be required based on the selection of 3rd party DALI controller. Controller and commissioning provided by others.

Lutron® EcoSystem® Enabled dimming (ES)

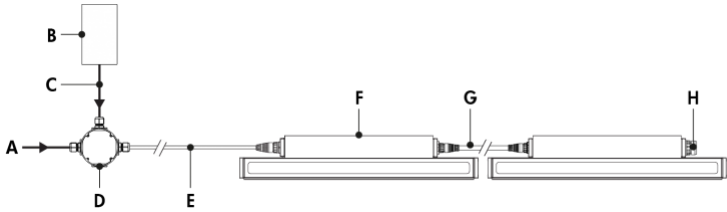

- A - Power input (100-277V, wiring by others)
- B - Lutron® EcoSystem® controller (by others)
- C - Data wiring (by others)
- D - Junction box (by others)
- E - Leader cable (LOGLC)
- F - Lumenfacade Horizontal (24 in,36 in or 48 in fixture lengths)
- G - Jumper cable (LOGJC)
- H - Sealing end cap


Lutron® EcoSystem® Enabled dimming (ES) - wiring detail



- A - Power input
- B - From Lutron® EcoSystem® controller (by others)
- C - Data +
- D - Data -
- E - To fixture
- F - Line
- G - Ground
- H - Neutral
- I - Wire-nuts (by others)
- J - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Each Lutron® EcoSystem® enabled fixture has its own address; for the example shown, there are a total of 2 EcoSystem® addresses.
- 1% minimum dimming value.
- ASHRAE version (not available for 12 in fixture lengths): 5 W/ft; Regular Output version: 8.5 W/ft; High Output version: 15.25 W/ft.

Star Layout (DMX/RDM)

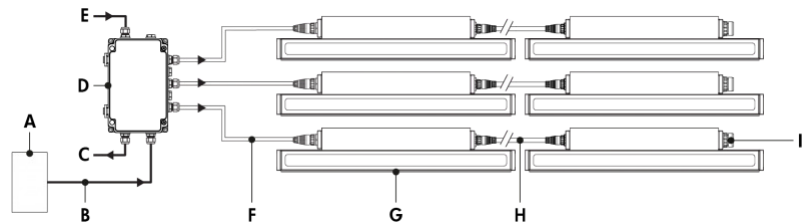

- A - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B - Data input (Belden 9841 or equivalent, by others)
- C - Data output to next CBX (optional, not isolated/not boosted)
- D - CBX-ST
- E - Power input (100-277V, wiring by others)
- F - Leader cable (LOGLC)
- G - Lumenfacade Horizontal
- H - Jumper cable (LOGJC)
- I - Sealing end cap

Daisy Chain Layout (DMX/RDM)

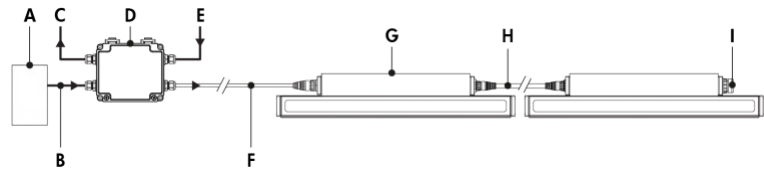

- A - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B - Data input (Belden 9841 or equivalent, by others)
- C - Data output to next CBX (optional, not isolated/not boosted)
- D - CBX-DS
- E - Power input (100-277V, wiring by others)
- F - Leader cable (LOGLC)
- G - Lumenfacade Horizontal
- H - Jumper cable (LOGJC)
- I - Sealing end cap

Maximum Run of Fixtures, Lumenfacade® LOGH ASHRAE White & Static Colors 5 W/ft

Voltage	120V	240V	277V
Maximum Run of Fixtures*	128ft	128ft	128ft

Maximum Run of Fixtures, Lumenfacade® LOGH RO White & Static Colors 8.5 W/ft

Voltage	120V	240V	277V
Maximum Run of Fixtures*	120ft	128ft	128ft

Maximum Run of Fixtures, Lumenfacade® LOGH HO White & Static Colors 15.25 W/ft

Voltage	120V	240V	277V
Maximum Run of Fixtures*	68ft	80ft	88ft

Based on 15A maximum, 50ft leader cable.

\*Example: 120V = 120ft maximum run of end to end fixtures (30 fixtures maximum for 4ft LOGH RO).

Based on 15A maximum, 50 ft leader cable.

- Consult CBX installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations. Maximum run length calculations are typically based on 48 in fixtures.
- The DMX/RDM protocol states a maximum of 32 DMX/RDM enabled fixtures on any single run.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 6 outputs per CBX-ST; maximum of 1 output per CBX-DS.
- Each fixture requires 1 DMX address.
- 1% minimum dimming value.
- ASHRAE version (not available for 12 in fixture lengths): 5 W/ft; Regular Output version: 8.5 W/ft; High Output version: 15.25 W/ft.

How to order

Housing <sup>(2)</sup>	Voltage <sup>(3)</sup>	Length	Color and Color Temperature <sup>(5)</sup>	Optics	Feeding Side	Mounting Options	Finish	Control	Options	Buy America.n Act
<b>LOGH ASHRAE</b> Lumenfacade™ Horizontal, 5 W/ft ASHRAE compliant <sup>(1)</sup>	<b>100</b> 100 volts	<b>12</b> 13 3/8 in (4.5 lbs) <sup>(2)</sup> <sup>(4)</sup>	<b>22K</b> 2200K	<b>WW</b> Asymmetric Wallwash	<b>LF</b> Left feeding side	<b>UMP</b> Fixed Mounting <sup>(8)</sup>	<b>BK</b> Black Sandtex®	<b>NO</b> On/Off control	<b>ETE</b> End-to-end configuration (factory installed 16 in black input cable included)	<b>BAA</b> Buy America.n <sup>(20)</sup> <sup>(21)</sup>
<b>LOGH RO</b> Lumenfacade™ Horizontal Regular Output, 8.5 W/ft	<b>120</b> 120 volts	<b>24</b> 25 3/8 in (7 lbs)	<b>27K</b> 2700K	<b>8x8</b> 8° x 8° <sup>(7)</sup>	<b>RF</b> Right feeding side	<b>UMAS</b> Universal Adjustable Mounting <sup>(8)</sup>	<b>BRZ</b> Bronze Sandtex®	<b>LT</b> Lumentalk <sup>(4)</sup> <sup>(12)</sup> <sup>(13)</sup>	<b>CRC</b> Corrosion-resistant coating for hostile environments <sup>(16)</sup> <sup>(17)</sup>	
<b>LOGH HO</b> Lumenfacade™ Horizontal High Output, 15.25 W/ft	<b>208</b> 208 volts	<b>36</b> 37 3/8 in (10.5 lbs)	<b>30K</b> 3000K	<b>10x10</b> 10° x 10° <sup>(7)</sup>			<b>SI</b> Silver Sandtex®	<b>DIM</b> 0-10V dimming	<b>3GV</b> 3G ANSI C136.31-2010 Vibration Rating for bridge applications <sup>(18)</sup>	
	<b>220</b> 220 volts	<b>48</b> 49 3/8 in (14 lbs)	<b>35K</b> 3500K	<b>10x30</b> 10° x 30°		<b>WAMH6</b> Adjustable Extended Arm Mounting 6 in Horizontal version	<b>WH</b> Smooth white	<b>DALI</b> DALI dimming	<b>CE</b> CE (certification covers European Economic Area) <sup>(19)</sup>	
	<b>240</b> 240 volts		<b>40K</b> 4000K	<b>10x60</b> 10° x 60°		<b>WAMH12</b> Adjustable Extended Arm Mounting 12 in Horizontal version	<b>CC</b> Custom color and finish (please specify RAL color) <sup>(9)</sup> <sup>(10)</sup> <sup>(11)</sup>	<b>ES</b> Lutron® EcoSystem® Enabled dimming <sup>(14)</sup>		
	<b>277</b> 277 volts		<b>RD</b> Red <sup>(6)</sup>	<b>10x90</b> 10° x 90°				<b>DMX/RDM</b> DMX/RDM enabled <sup>(15)</sup>		
			<b>GR</b> Green <sup>(6)</sup>	<b>15x25</b> 15° x 25°						
			<b>BL</b> Blue <sup>(6)</sup>	<b>30x30</b> 30° x 30°						
				<b>30x60</b> 30° x 60°						
				<b>35x35</b> 35° x 35°		<b>WAMH18</b> Adjustable Extended Arm Mounting 18 in Horizontal version				
				<b>50x80</b> 50° x 80°						
				<b>60x60</b> 60° x 60°						
				<b>80x80</b> 80° x 80°						
				<b>90x90</b> 90° x 90°						

- Notes:**

  - ASHRAE version not available for 12 in fixture lengths.
  - Power consumption is typically 20% higher for 12 in fixture lengths.
  - 347 volts available, consult factory for details.
  - To connect 12 in fixture lengths to the Lumentalk system, DIM or DMX/RDM must be specified as the control option, and a Lumentalk Data Bridge (LDB) is required. See the typical wiring diagrams in the specification sheet for details.
  - Consult factory for availability of static Royal Blue, 6500K and 90+ CRI.
  - Static colors made to order 8-10 weeks.
  - For best results use with HO fixtures at a 6 in setback from surface. Contact factory for application support.
  - Suitable to use when 3GV option is specified.
  - Lumenpulse offers a wide selection of RAL CLASSIC (K7) colors with a smooth texture and high-gloss finish. Please consult factory for a list of available K7 colors, other RAL textures and glosses, or to match alternate color charts. Final color matching results may vary.
  - Setup charges apply for RAL colors. Consult factory for details.
- Longer lead times can be expected for custom RAL color finishes.
  - Available for 24 in, 36 in and 48 in fixture lengths only.
  - A Lumentrator 2 (LTL2) and LumentalkID (LIDLTL) must be specified for Lumentalk applications. Consult Lumentrator 2 and Lumentalk pages and specification sheets for details.
  - Available for 24 in (ASHRAE and RO only), 36 in and 48 in fixture lengths only.
  - A control box (CBX) and LumenID (LID) must be specified.
  - Use only when exposed to salt spray. This option is not required for normal outdoor exposure.
  - Setup charges apply. Consult factory for details.
  - Available with UMP and UMAS mounting options only.
  - Consult European specification sheet and installation instructions for CE wiring information.
  - Not available with CE certification option.
  - Contact your Lumenpulse Sales Representative for more information on order volume details.