


Project Name

Qty

Type

Catalog / Part Number

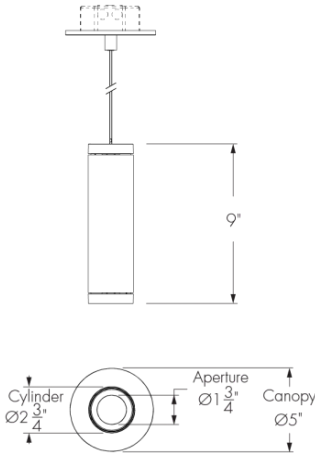

Front view

Bottom view


Photometric Summary

Based on Narrow Optic (nominal 25°), 4000K, CRI 80+


Nominal output [lm]	Delivered output [lm] ^[1]	Power (120V) [W] ^[2]	Efficacy [lm/W]	Power (277V) [W] ^[2]	Efficacy [lm/W]
700	782	7.5	104	9	87
1000	1,032	11	94	13	79
1300	1,404	13	108	15	94

[1] Consult website for latest IES files.
[2] Add 3 watts per fixture when specifying Lumentalk™.

Optics

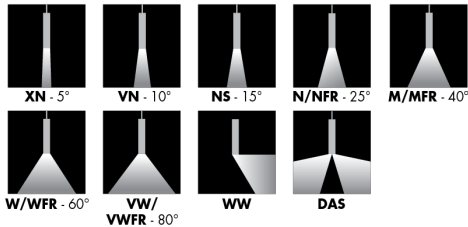

Color and Color temperature



Control

ON/OFF PH 0-10V

Description

The Short Cylinder Nano Pendant is a high-performance LED downlight that is ideal for intimate commercial, residential or hospitality applications and delivers up to 2000 lumens from a 2.75 in diameter. Available in 9 in, the Short Cylinder Nano comes in a number of finishes, or can be color-specified to your taste. Its accessories, beam angles, trims, and optics can easily be changed in the field.

Features

Mounting Options	Electrical cable mounting (flat canopy or deep canopy), Stem mounting (flat canopy or deep canopy)
Suspension Length	Metal pipe (12 in, 24 in, 36 in or 48 in), Pendant cable (50 in, 100 in or 250 in, field adjustable, black or white)
Light Direction	Direct lighting
Length	9 in
Installation Type	Integrated driver
Direct Lighting Output (nominal lumens)	700lm, 1000lm, 1300lm, 2000lm
Direct Lighting Color Temperature	2200K, 2700K, 3000K, 3500K, 4000K
Direct Lighting Optics (nominal distribution)	Extra narrow spot 5°, Very narrow spot 10°, Narrow spot 15°, Narrow 25°, Narrow faceted reflector 25°, Medium 40°, Medium faceted reflector 40°, Wide 60°, Wide faceted reflector 60°, Very wide 80°, Very wide faceted reflector 80°, True asymmetric wallwash, Double asymmetric
Optical Accessories	Snoot, Half snoot, Honeycomb louver, Concentric ring louver, Clear glass lens, Softening glass lens, Prismatic diffuser, Linear spread lens narrow (1° x 40°), Linear spread lens wide (1° x 60°), Beam widening lens (+10°), Beam widening lens (+20°), Beam widening lens (+30°)

Finishes



CC-Custom color and finish
(Please specify RAL color)

Certifications



Direct Lighting Accessories	No accessory , Snoot, Half snoot , Honeycomb louver, Concentric ring louver, Clear glass lens, Softening glass lens , Prismatic diffuser, Linear spread lens narrow (1° x 40°), Linear spread lens wide (1° x 60°), Beam widening lens (+10°), Beam widening lens (+20°), Beam widening lens (+30°)
------------------------------------	---

Warranty	5-year limited warranty
-----------------	-------------------------

Physical

Weight	2.3 lbs
Housing Material	Aluminum
TIR Optics Material	Clear polycarbonate
Reflector Material	Aluminum

Performance

Maximum Delivered Output	Up to 2,726 lm (narrow spot optic 15°, 4000K, CRI 80)
Maximum Delivered Intensity	Up to 29,582 cd (extra narrow spot optic 5°, 4000K, CRI 80)
Efficacy	Up to 134 lm/W (narrow spot optic 15°, 4000K, CRI 80)
Color Consistency	2 SDCM, 3 SDCM (XN optic only)
Color Rendering	CRI 80+, CRI 90+, CRI 95+
Lumen Maintenance	L95 55,000 hrs, L70 225,000 hrs
UGR	< 19 (not applicable to WW and DAS distributions)

Electrical and control


Voltage	120 volts, 277 volts
Control	On/Off control, Phase dimming, Standard 0-10V dimming to 1% linear curve, 0-10V dimming (1% linear)

Environmental

Environment	Damp location (interior applications only)
Operating Temperature	-4 °F to 86 °F
Ingress Protection Rating	IP20


Mounting Option Dimensions

Flat canopy & cable option

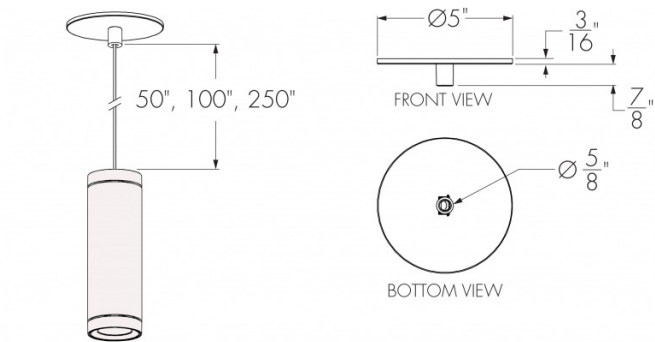


The fixture uses an electrical cable for its pendant cable.

Flat canopy & stem option

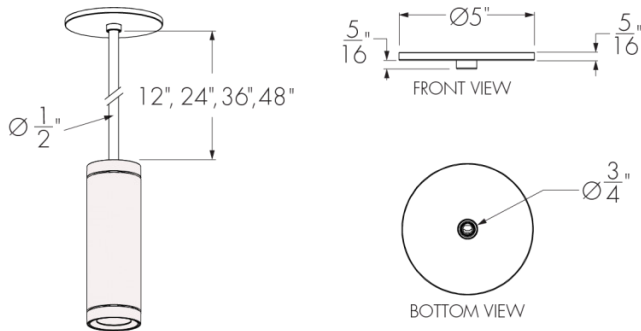


Deep canopy & cable option

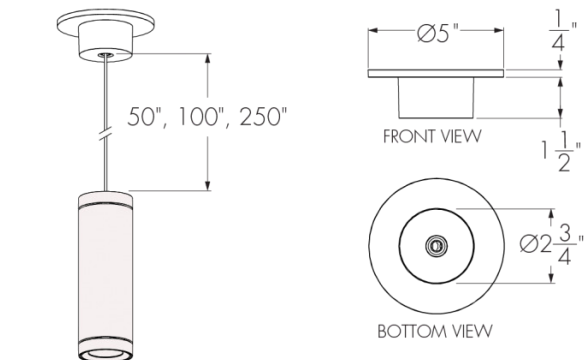


The fixture uses an electrical cable for its pendant cable.

Deep canopy & stem option

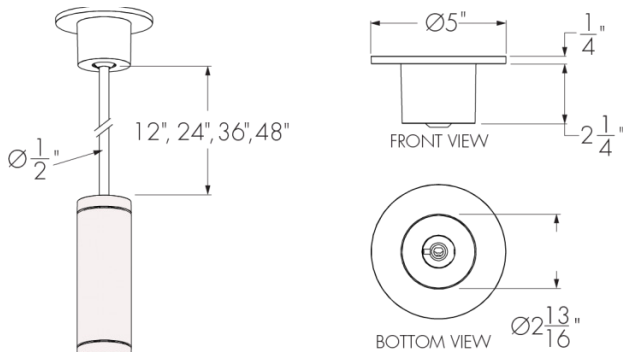


MAXIMUM CEILING ANGLE FOR DEEP CANOPY: 35°




Optical accessory dimensions

Snoot

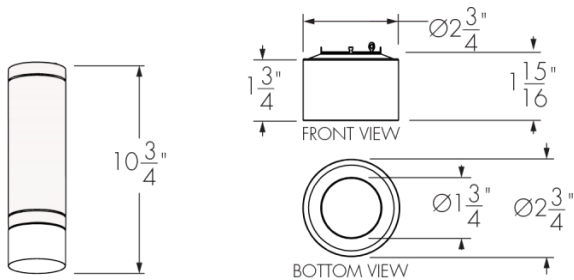

Half snoot

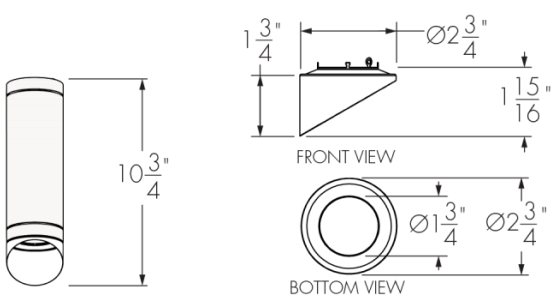

Photometric information - Color rendering options comparison, 3000K

Color sample	Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
CRI 80+	84	82	90	97	83	82	88	86	63	15	77	83	68	84	98	75
CRI 90+	92	93	97	98	92	93	97	90	79	55	93	93	85	94	100	88
CRI 95+	97	96	97	99	96	96	95	96	97	97	96	95	86	96	98	97

Optics

TIR Optic

XN/VN/NS/N



Semi-Specular reflector

M/W/VW



Faceted reflector

NFR/MFR/WFR/VWFR



Control


- On/off control

NO - On/off control
- Phase dimming

PH - Phase dimming
- Standard 0-10V dimming down to 1%


DAMC - Standard 0-10V dimming to 1% linear curve

DA1 - Standard 0-10V dimming, 1% linear




Photometric information - direct lighting optics


XN - Extra Narrow Spot (nominal 5°), 4000K

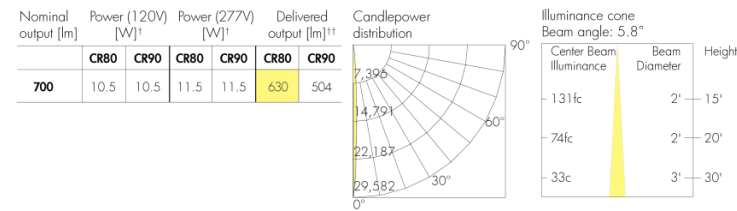


VN - Very Narrow Spot (nominal 10°), 4000K

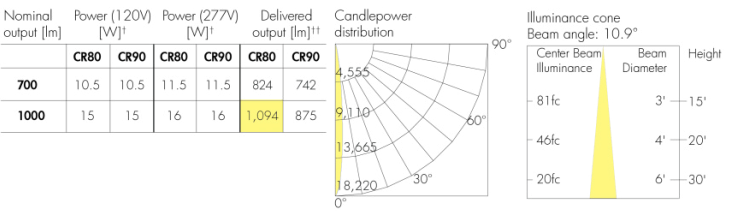


NS - Narrow Spot (nominal 15°), 4000K

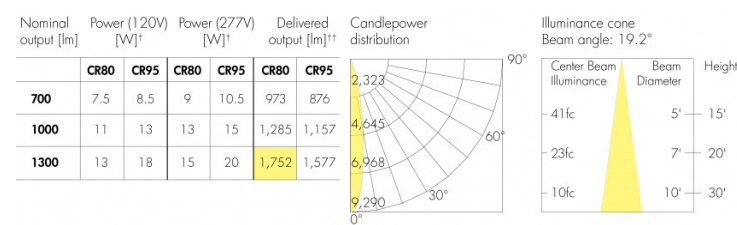


N - Narrow (nominal 25°), 4000K

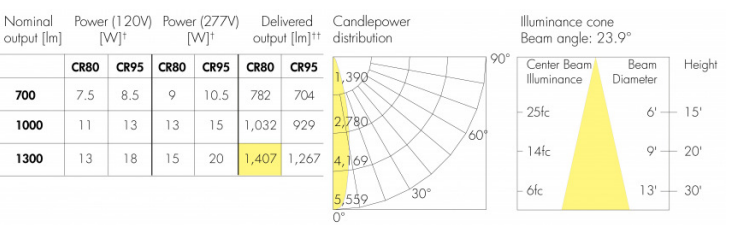


M - Medium (nominal 40°), 4000K

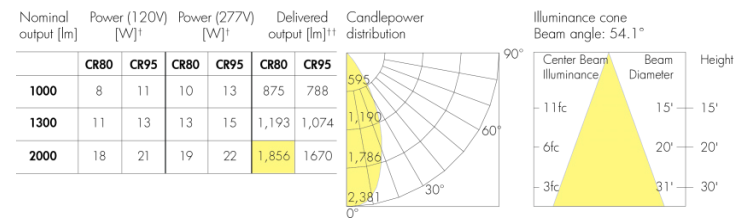


MFR - Medium faceted reflector (nominal 40°), 4000K

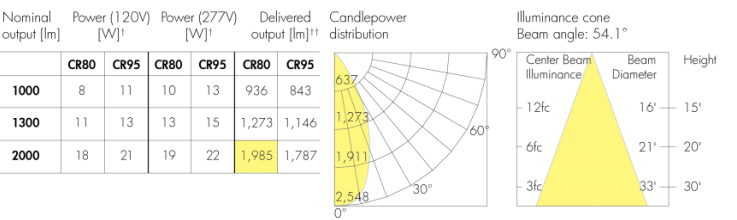

W - Wide (nominal 60°), 4000K

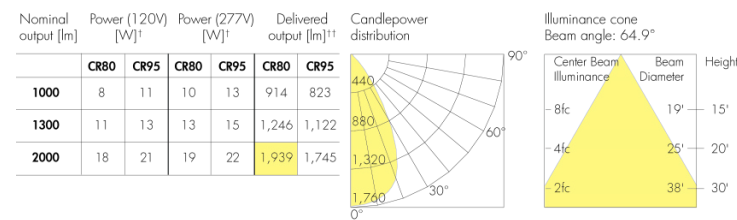


WFR - Wide faceted reflector (nominal 60°), 4000K

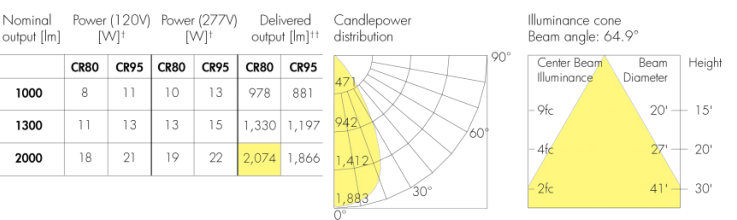


† Delivered wattage: +/- 10% tolerance.
†† Consult website for latest IES files. Delivered output: +/- 10% tolerance.

0-10V dimming (DAMC, DA1)

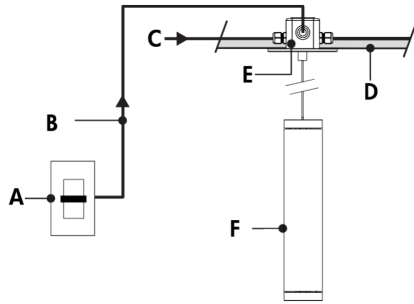

- A** - Dimmer (by others)
- B** - Data wiring (by others)
- C** - Power input (120-277V)
- D** - Power and data wiring (by others)
- E** - 4 in octagonal/round junction box (by others)
- F** - Cylinder Nano

0-10V dimming (DAMC, DA1) - wiring detail









- A** - Power input or from previous fixture
- B** - To fixture
- C** - 0-10V +
- D** - 0-10V -
- E** - To next fixture
- F** - Line
- G** - Ground
- H** - Neutral
- I** - Wire-nuts (by others)
- J** - From dimmer (by others)
- K** - 4 in octagonal/round junction box (by others)

Wiring color code

Color	USE
Green	Ground
Black	Line
White	Neutral
Red or purple	0-10V / Data +
Orange or grey	0-10V / Data -

- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Consult Photometric Information pages for wattage information.

Optical Accessories

SN - Snoot  LACYN - SN XLVR - Concentric ring louver  LACYN- XLVR PD – Prismatic diffuser  LACYN - PD BW1 - Beam widening lens (+10°)  LACYN - BW1	HSN - Half Snoot  LACYN - HSN CL - Clear glass lens  LACYN - CL LSN - Linear spread lens narrow (1° x 40°)  Horizontal Beam Distribution  Vertical Beam Distribution LACYN - LSN BW2 - Beam widening lens (+20°)  LACYN - BW2	HL - Honeycomb louver  LACYN - HL SL - Softening glass lens  LACYN - SL LSW - Linear spread lens wide (1° x 60°)  Horizontal Beam Distribution  Vertical Beam Distribution LACYN - LSW BW3 - Beam widening lens (+30°)  LACYN - BW3
---	--	---

How to order

Housing ⁽¹⁾	Certification	Mounting	Mounting Option Finish	Mounting Length	Light Direction	Voltage	Length	Installation Type	Direct Lighting Output (nominal lumens)	Direct Lighting Color Temperature	Direct Lighting Color Rendering
LACYN Short Cylinder Nano - Ø2 3/4 in	A UL/cUL	PMF Pendant mount flat canopy PMD Pendant mount deep canopy PSF Pendant stem mount flat canopy ⁽²⁾ PSD Pendant stem mount deep canopy ⁽²⁾	MWH Matte white MBK Matte black MSI Matte silver CC Custom color ⁽³⁾ ⁽⁴⁾	M1 Metal pipe (12 in) ⁽⁵⁾ M2 Metal pipe (24 in) ⁽⁵⁾ M3 Metal pipe (36 in) ⁽⁵⁾ M4 Metal pipe (48 in) ⁽⁵⁾ CA50BK Electrical cable pendant black (50 in, field adjustable) ⁽⁶⁾ ⁽⁷⁾ CA100BK Electrical cable pendant black (100 in, field adjustable) ⁽⁶⁾ ⁽⁷⁾ CA250BK Electrical cable pendant black (250 in, field adjustable) ⁽⁶⁾ ⁽⁷⁾ CA50WH Electrical cable pendant white (50 in, field adjustable) ⁽⁶⁾ ⁽⁷⁾ CA100WH Electrical cable pendant white (100 in, field adjustable) ⁽⁶⁾ ⁽⁷⁾ CA250WH Electrical cable pendant white (250 in, field adjustable) ⁽⁶⁾ ⁽⁷⁾	D Direct lighting	120 120 volts 277 277 volts	9 9 in	ITG Integrated driver	dL07 700lm dL10 1000lm dL13 1300lm dL20 2000lm	22K 2200K ⁽⁸⁾ ⁽⁹⁾ 27K 2700K 30K 3000K 35K 3500K 40K 4000K	CR80 CRI 80+ CR90 CRI 90+ ⁽¹⁰⁾ CR95 CRI 95+

Notes:

1. Refer to website product configurator for all exceptions.

2. Stem finish matches fixture housing color.

3. Refer to Finish section for additional color codes (ex. MGR).

4. Longer lead times can be expected for custom RAL color finishes.

5. Metal pipe available for PSF and PSD mounting options only.

6. Electrical cable pendant available for PMF and PMD mounting options only.

7. Strain relief matches color of electrical cable.

8. Available for CR80 only.

9. Not available for XN and VN optics.

10. Available when combined with XN or VN optics only.

How to order

Direct Lighting Optics (nominal distribution)	Direct Lighting Control	Direct Lighting Accessories ⁽²³⁾ ⁽²⁴⁾	Finish	Bezel	Bezel Finish
XN Extra narrow spot 5° ⁽¹¹⁾	NO On/off control ⁽¹⁶⁾	NA No accessory	MWH Matte white	b Bezel	MWH Matte white
VN Very narrow spot 10° ⁽¹²⁾	PH Phase dimming ⁽¹⁷⁾ ⁽¹⁸⁾	SN Snoot ⁽²⁵⁾	MBK Matte black		MBK Matte black
NS Narrow spot 15° ⁽¹³⁾	DAMC Standard 0-10V dimming to 1% linear curve ⁽¹⁹⁾ ⁽²⁰⁾ ⁽²¹⁾	HSN Half snoot ⁽²⁵⁾	MBR Matte brown		MBR Matte brown
N Narrow 25° ⁽¹³⁾		HL Honeycomb louver ⁽²⁶⁾	MOR Matte orange		MOR Matte orange
NFR Narrow faceted reflector 25° ⁽¹³⁾	DA1 Standard 0-10V dimming 1% linear ⁽²²⁾	XLVR Concentric ring louver ⁽²⁷⁾	MGR Matte green		MGR Matte green
M Medium 40°		CL Clear glass lens	MBL Matte blue		MBL Matte blue
MFR Medium faceted reflector 40°		SL Softening glass lens	MSI Matte silver		MSI Matte silver
W Wide 60°		PD Prismatic diffuser	GWH Glossy white		GWH Glossy white
WFR Wide faceted reflector 60°		LSN Linear spread lens narrow (1° x 40°) ⁽²⁸⁾	GBK Glossy black		GBK Glossy black
VW Very wide 80°		LSW Linear spread lens wide (1° x 60°) ⁽²⁹⁾	GYL Glossy yellow		GYL Glossy yellow
VWFR Very wide faceted reflector 80°		BW1 Beam widening lens (+10°) ⁽³⁰⁾	GLR Glossy red		GLR Glossy red
WW True asymmetric wallwash ⁽¹³⁾ ⁽¹⁴⁾		BW2 Beam widening lens (+20°) ⁽³⁰⁾	GVI Glossy violet		GVI Glossy violet
DAS Double asymmetric ⁽¹³⁾ ⁽¹⁵⁾		BW3 Beam widening lens (+30°) ⁽³⁰⁾	GGR Glossy green		GGR Glossy green
			GIY Glossy ivory		GIY Glossy ivory
			CGY Concrete grey		CGY Concrete grey
			MLG Metalized grey		MLG Metalized grey
			IBR Italian brick red		IBR Italian brick red
			PWH Parget white		PWH Parget white
			CC Custom color & finish ⁽⁴⁾		CC Custom color & finish ⁽⁴⁾

- Notes:**

4. Longer lead times can be expected for custom RAL color finishes.

11. Available for 700 lumens when combined with CR80 or CR90 color rendering options only.

12. Available for 700 and 1000 lumens when combined with CR80 or CR90 color rendering options only.

13. Available up to 1300 lumens (CR80/CR95).

14. The color of the true asymmetric wallwash baffle matches the fixture bezel.

15. The color of the double asymmetric baffle is metallic gray.

16. Manufacturer's choice driver. Order code may change to NO1.

17. Manufacturer's choice driver. Order code may change to PH1 or PH2.

18. Available for 120V voltage option only.

19. Manufacturer's choice driver. Order code may change to DAMC1 or DAMC2.

20. Not available for XN and VN optics.

21. Available up to 2000 lumens when combined with CR80 color rendering option. Available up to 1300 lumens when combined with CR90 or CR95 color rendering options.
22. Driver cuts off power to the fixture when the control signal drops below 0.5V.

23. Accessories specified in the fixture code are factory installed but can also be changed in the field. Refer to installation instructions for details. To order accessories separately, refer to the Optical Accessories section of the specification sheet.

24. Maximum of two lenses can be installed per fixture. The Snoot (SN) or Half Snoot (HSN) can be combined with any accessory. The Linear Spread Lenses (LSN or LSW) are compatible with the Snoot and Half Snoot accessories only. The Clear Glass Lens (GL), Beam Widening Lens (BW1, BW2 or BW3) and Softening Glass Lens (SL) cannot be combined together. Optical accessories are not available for WW or DAS optics.

25. Matte black interior surface, exterior finish matches housing color.

26. When combined with another accessory, the HL will be factory-installed in second position (furthest from the LED source).

27. Available for XN, VN and NS optics only.

28. Available for XN, VN, NS, N and NFR optics only. Nominal 10° x 40° distribution when used with the NS optic.

29. Available for XN, VN, NS, N and NFR optics only. Nominal 10° x 60° distribution when used with the NS optic.

30. Available for XN, VN, NS, N and NFR optics only.