


Project Name \_\_\_\_\_ Qty \_\_\_\_\_

Type \_\_\_\_\_ Catalog / Part Number \_\_\_\_\_

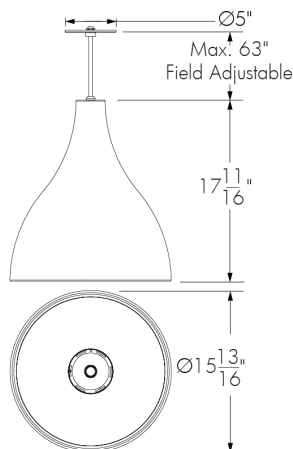


Front View

Bottom View

## Photometric Summary

Consult the Photometric Information section of the Specification Sheet for 3000K CRI 92 data. For all other configurations, consult IES files on the Lumenpulse website.

## Color and Color Temperature




## Color Rendering

CRI 92      CRI 98

## Control

ON/OFF      0-10V      Phase Dimming

## Mounting and Cable Finish



Matte White      Matte Black

## Description

Playful yet powerful, the WILLY XLarge pendants are inherently decorative; they are designed to be seen, they have a presence, even when unlit. Exenia's command of paints, textures, and finishes makes our pendants especially striking. The vast choice of colored finishes make them highly applicable to any color scheme or type of space for work or leisure.

## Features

<b>Output (Nominal Lumens)</b>	<b>L35:</b> 3500 lm
<b>Color and Color Temperature</b>	<b>27K:</b> 2700K <b>30K:</b> 3000K <b>35K:</b> 3500K <b>40K:</b> 4000K
<b>Mounting and Cable Finish</b>	<b>MWH:</b> Matte White <b>MBK:</b> Matte Black
<b>Finish</b>	<b>GLR:</b> Glossy Red <b>IBR:</b> Italian Brick Red <b>GGR:</b> Glossy Green <b>GYL:</b> Glossy Yellow <b>GWH:</b> Glossy White <b>MBK:</b> Matte Black <b>MBL:</b> Matte Blue <b>CRT:</b> Corten <b>CGY:</b> Concrete Grey
<b>Bezel Finish</b>	<b>GLR:</b> Glossy Red <b>IBR:</b> Italian Brick Red <b>GGR:</b> Glossy Green <b>GYL:</b> Glossy Yellow <b>GWH:</b> Glossy White <b>MBK:</b> Matte Black <b>MBL:</b> Matte Blue <b>CGY:</b> Concrete Grey

**Finish**



**Bezel Finish**



**Certifications**



<b>Optic (Nominal Distribution)</b>	<b>FL:</b> Flood 35° <b>WFL:</b> Wide Flood 55°
-------------------------------------	--

<b>Warranty</b>	5-year limited warranty
-----------------	-------------------------

**Performance**

<b>Maximum Delivered Output</b>	Up to 4,124 lm (L35, CRI 92, 40K, WFL)
---------------------------------	--

<b>Maximum Delivered Intensity</b>	10,863 cd at nadir (L35, CRI 92, 40K, FL)
------------------------------------	---

<b>Efficacy</b>	Up to 100 lm/W (L35, CRI 92, 40K, WFL)
-----------------	--

<b>Color Rendering</b>	<b>92:</b> CRI 92 <b>98:</b> CRI 98
------------------------	--

<b>Color Consistency</b>	2 SDCM
--------------------------	--------

<b>Lumen Maintenance</b>	L70 120,000 hours L95 19,000 hours
--------------------------	---------------------------------------

**Physical**

<b>Housing Material</b>	Spun aluminum (Spun steel for Corten finish)
-------------------------	--

<b>Reflector Material</b>	Spun aluminum
---------------------------	---------------

<b>Weight</b>	6.61 lbs
---------------	----------

**Electrical and Control**

<b>Voltage</b>	<b>120/277:</b> 120/277 Volts
----------------	-------------------------------

<b>Wattage</b>	41.1 Watts
----------------	------------

<b>Control</b>	<b>NO:</b> On/Off Control <b>DIM:</b> 0-10V Dimming 1% <b>PH:</b> Phase Dimming 1%
----------------	--

**Environmental**

<b>Ingress Protection Rating</b>	IP20
----------------------------------	------



<b>Environment</b>	Damp location (interior applications only)
--------------------	--

<b>Operating Temperature</b>	-4 °F to 86 °F
------------------------------	----------------

**Photometric Information**

Flood, L35, 3000K, CRI 92

Wide Flood, L35, 3000K, CRI 92

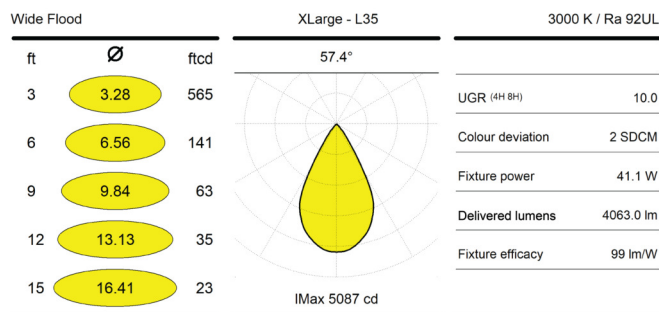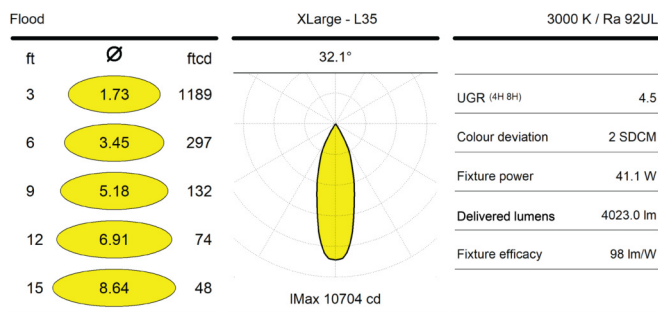

For all other configurations, consult IES files on the Lumenpulse website.

**How to Order**

Housing	Size	Voltage	Control	Output (Nominal Lumens)	Finish	Mounting Option Finish <sup>(2)</sup>	Color Rendering	Color and Color Temperature	Bezel Finish	Optic (Nominal Distribution)
WL WILLY	XL Xlarge	120/277 120/277 Volts	<b>NO</b> On/Off Control  <b>DIM</b> 0-10V Dimming 1%  <b>PH</b> Phase Dimming 1% <sup>(1)</sup>	L35 3500 lm	<b>GLR</b> Glossy Red  <b>IBR</b> Italian Brick Red  <b>GGR</b> Glossy Green  <b>GYL</b> Glossy Yellow  <b>GWH</b> Glossy White  <b>MBK</b> Matte Black  <b>MBL</b> Matte Blue  <b>CGY</b> Concrete Grey  <b>CRT</b> Corten	<b>MWH</b> Matte White  <b>MBK</b> Matte Black	<b>92</b> CRI 92  <b>98</b> CRI 98	<b>27K</b> 2700K  <b>30K</b> 3000K  <b>35K</b> 3500K  <b>40K</b> 4000K	<b>GLR</b> Glossy Red  <b>IBR</b> Italian Brick Red  <b>GGR</b> Glossy Green  <b>GYL</b> Glossy Yellow  <b>GWH</b> Glossy White  <b>MBK</b> Matte Black  <b>MBL</b> Matte Blue  <b>CGY</b> Concrete Grey	<b>FL</b> Flood 35°  <b>WFL</b> Wide Flood 55°

**Notes:**

1. Phase dimming (PH) is only compatible with 120V power.

2. The color of the electrical cable matches the color specified for the mounting option.