


Project Name


Qty

Type

Catalog / Part Number

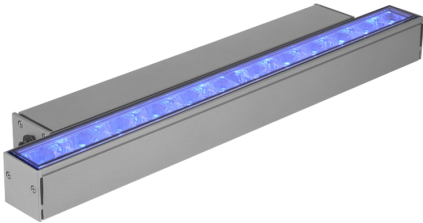


MRGBW40K Configuration Shown

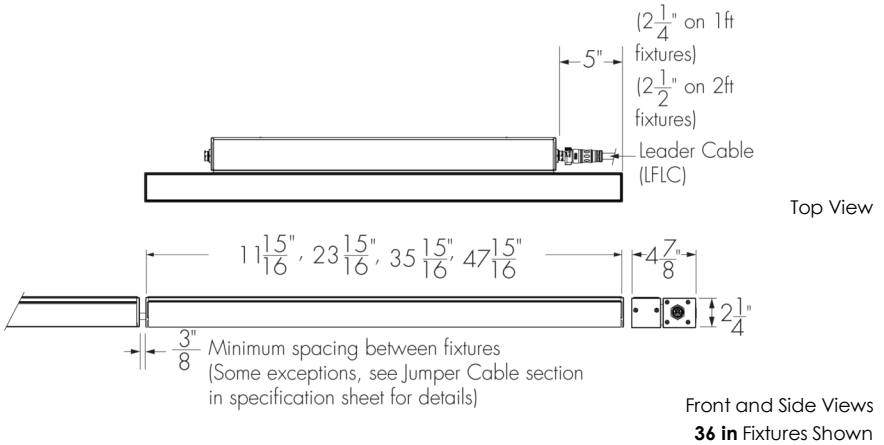


Photometric Summary (22 W/ft)			Description	
Symmetric			The Lumenfacade Max introduces never-before-seen technologies and is the first linear fixture in the world to feature Opticolor™, Lumenpulse's revolutionary, patented mixed-at-source technology. The Lumenfacade Max also plays host to the world debut of Optidrive™, our brand-new, proprietary technology that delivers maximum performance, maximum technology, and maximum quality of light with Lumenpulse's legendary consistency of colour.	
	Delivered Output (lm)	Intensity (Peak cd)		
10°x10°	3,783	50,453	Features	
10°x30°	3,575	18,568		
10°x60°	3,598	11,407	Length (nominal)	
10°x90°	3,598	7,779		
30°x30°	3,530	8,350	Color and Color Temperature	
30°x60°	3,503	4,561		
30°x90°	3,181	3,243	Vibration Rating	
60°x60°	3,461	2,850		
90°x90°	3,383	1,958	Fixed Mounting Options	
30°x10°	3,384	16,675		
60°x10°	3,476	10,543	Based on MRGBW40K, 4ft [1218mm], DMX/RDM control. Photometric performance is measured in compliance with IESNA LM-79-08. 10x10, 10x30, 10x60, 10x90, 30x30, 30x60, 30x90, 60x60, 90x90, 30x10, 60x10, 60x30, 90x10, NAS and CAS optics tested with CL lens. VVV optic tested with HFR lens.	
60°x30°	3,468	5,158		
90°x10°	3,085	6,190	NVR: No Vibration Rating Required VRN: Vibration Rated for Normal Applications VRBO: Vibration Rated for Bridge and Overpass	
W (120°)	2,667	940		
Asymmetric			FXH: Fixed Mounting Horizontal (0° Pivot Limit)	
NAS	3,726	22,743		
WW	3,595	5,910	MRGB: Opticolor Cluster with MRGB (Red, Green, Blue) MRGBW27K: Opticolor Cluster with MRGBW (Red, Green, Blue, White 2700K CRI 80) MRGBW30K: Opticolor Cluster with MRGBW (Red, Green, Blue, White 3000K CRI 80) MRGBW35K: Opticolor Cluster with MRGBW (Red, Green, Blue, White 3500K CRI 80) MRGBW40K: Opticolor Cluster with MRGBW (Red, Green, Blue, White 4000K CRI 80) MRGBA: Opticolor Cluster with MRGBA (Red, Green, Blue, PC Amber)	
CAS	2,909	3,974		

Optic

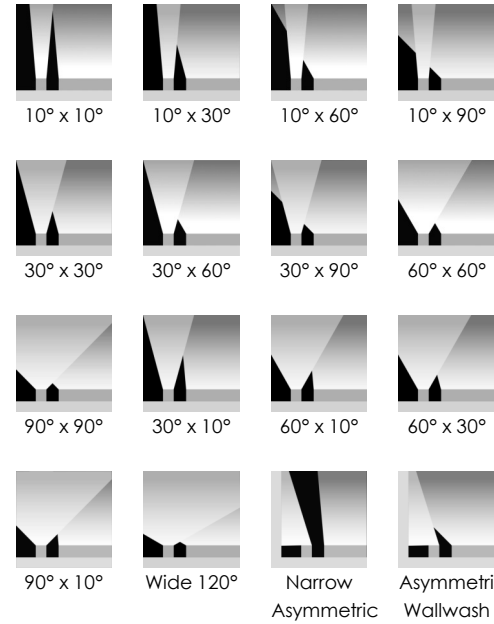

Color and Color Temperature

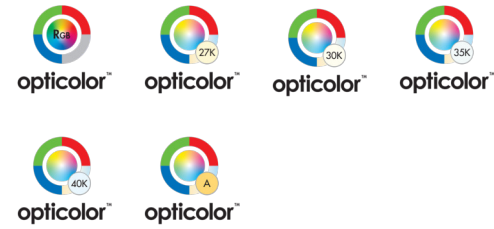



Control





Continuously Adjustable Mounting Options	SMH: Slim Adjustable Mounting Horizontal Continuously Adjustable (100° Pivot Limit)	WMCH3: Wall Mounting Horizontal Continuously Adjustable, 3.5 in to Optical Center (120° Pivot Limit)
	WMCH6: Wall Mounting Horizontal Continuously Adjustable, 6 in to Optical Center (180° Pivot Limit)	WMCH12: Wall Mounting Horizontal Continuously Adjustable, 12 in to Optical Center (180° Pivot Limit)
Incrementally Adjustable Mounting Options	WMCH18: Wall Mounting Horizontal Continuously Adjustable, 18 in to Optical Center (180° Pivot Limit)	WMCH24: Wall Mounting Horizontal Continuously Adjustable, 24 in to Optical Center (180° Pivot Limit)
	WMIH3: Wall Mounting Horizontal Incrementally Adjustable by 6°, 3.5 in to Optical Center (120° Pivot Limit)	WMIH6: Wall Mounting Horizontal Incrementally Adjustable by 6°, 6 in to Optical Center (180° Pivot Limit)
Optical Accessories	WMIH12: Wall Mounting Horizontal Incrementally Adjustable by 6°, 12 in to Optical Center (180° Pivot Limit)	WMIH18: Wall Mounting Horizontal Incrementally Adjustable by 6°, 18 in to Optical Center (180° Pivot Limit)
	WMIH24: Wall Mounting Horizontal Incrementally Adjustable by 6°, 24 in to Optical Center (180° Pivot Limit)	
Warranty	LV: Radial Louver	
	LVAS: Radial Louver Asymmetric	
Performance	VS: Visor	
	5-year limited warranty	
Maximum Delivered Output	1,876 lm	
	10 W/ft, 48 in fixture, MRGBW40K, 10° x 10°, CL lens, DMX/RDM)	
Maximum Delivered Intensity	3,783 lm	
	(22 W/ft, 48 in fixture, MRGBW40K, 10° x 10°, CL lens, DMX/RDM)	
	Refer to Photometric Guide on Lumenpulse website for information on other color temperatures.	
	25,025 cd at nadir	
	(10 W/ft, 48 in fixture, MRGBW40K, 10° x 10°, CL lens, DMX/RDM)	
	50,453 cd at nadir	
	(22 W/ft, 48 in fixture, MRGBW40K, 10° x 10°, CL Lens, DMX/RDM)	
	Refer to Photometric Guide on Lumenpulse website for information on other color temperatures.	


Finish



Black
Sandtex®



Bronze
Sandtex®



Silver
Sandtex®



Smooth
White



Textured
Black


Textured
Bronze
Non-
Metallic


Textured
Medium
Gray



Textured
Green



Textured
White



Custom
Color &
Finish


Illuminance at Distance	Minimum 1 fc at 158 ft (10 W/ft, 48 in fixture, MRGBW40K, 10° x 10°, CL lens, DMX/RDM)
	Minimum 1 fc at 225 ft (22 W/ft, 48 in fixture, MRGBW40K, 10° x 10°, CL lens, DMX/RDM) Refer to Photometric Guide on Lumenpulse website for information on other color temperatures.
Lumen Maintenance	L70 (15K) > 90,000 hrs Ta 25 °C (TM-21 reported) L70 > 150,000 hrs Ta 25 °C (projected)* L90 (15K) = 55,400 hrs Ta 25 °C (TM-21 reported) L90 = 55,400 hrs Ta 25 °C (projected)* *Estimated based on in-situ case temperature and LM-80 report


Certifications






buyamericain





Physical	
Housing Material	Low copper content extruded aluminum
Lens Material	Tempered glass
Hardware Material	Stainless steel
End Cap Material	Die cast aluminum
Gasket Material	Silicone
Surface Finish	XD: Luminaire treated with extra-durable, multi-step finish: zirconium pretreatment completed with corrosion-resistant primer and electrostatically-applied, powder coat paint finish
Weight	5 lbs (12 in fixture) 9.3 lbs (24 in fixture) 14 lbs (36 in fixture) 17.5 lbs (48 in fixture)

Electrical and Control	
Voltage	120 to 277 volts (UL certification) 220 to 240 volts (CE certification, Class I)
Wattage	10W: 10 W/ft , 22W: 22 W/ft
Control	DMX/RDM: DMX/RDM Enabled DALIT8: DALI 2 T8 Control LT: Lumentalk
Inrush Current (Peak)	Meets NEMA-410 requirements (Based on voltage and control specifications, consult factory for details)

Environmental	
Storage Temperature	-40 °F to 185 °F
Start-up Temperature	-40 °F to 122 °F
Operating Temperature	For 10 W/ft fixtures: -40 °F to 122 °F For 22 W/ft fixtures, UL Certification: -40 °F to 122 °F For 22 W/ft fixtures, CE Certification: -40 °F to 104 °F

Ingress Protection Rating	IP66 IP67 (suitable for applications with temporary immersion in water only (no permanent immersion), proper drainage around the fixture is required). Consult factory for details
Impact Resistance Rating	IK07 (CL lens), IK07 (HFR lens), IK06 (FR lens) Consult factory for IK08 lens option
Application Wind Speed	Luminaires were designed based on AASHTO 2013 standard to ensure highest quality and safety. Installation should be validated by a local project engineer to ensure the luminaires are suitable for the wind speed and exposure of the specific application
Environment	Wet location

Accessories (Order Separately)

Cables	LFLC: Lumenfacade Leader Cable LFJC: Lumenfacade Jumper Cable LFTJ: Lumenfacade T-Junction
--------	--

Maximum Performance (MRGBW40K Optidrive™)

10W/ft			
Optic	Output (Lumens)	Intensity (Peak Candelas)	Illuminance at Distance
MRGBW40K - Full Output			
10° x 10	1,876	25,025	Minimum 1 fc at 158ft
MRGBW40K - Red Optidrive™			
10° x 10	779	10,385	Minimum 1 fc at 102ft
MRGBW40K - Green Optidrive™			
10° x 10	2,242	29,905	Minimum 1 fc at 173ft
MRGBW40K - Blue Optidrive™			
10° x 10	599	7,983	Minimum 1 fc at 89ft
MRGBW40K - White 40K Optidrive™			
10° x 10	2,512	33,508	Minimum 1 fc at 183ft

22W/ft			
Optic	Output (Lumens)	Intensity (Peak Candelas)	Illuminance at Distance
MRGBW40K - Full Output			
10° x 10	3,783	50,453	Minimum 1 fc at 225ft
MRGBW40K - Red Optidrive™			
10° x 10	840	11,201	Minimum 1 fc at 106ft
MRGBW40K - Green Optidrive™			
10° x 10	3,090	41,220	Minimum 1 fc at 203ft
MRGBW40K - Blue Optidrive™			
10° x 10	1,052	14,026	Minimum 1 fc at 118ft
MRGBW40K - White 40K Optidrive™			
10° x 10	4,032	53,783	Minimum 1 fc at 232ft

Refer to Photometric Guide on Lumenpulse website for information on other color temperatures.

Photometric Information

10 W/ft (MRGBW40K)			22 W/ft (MRGBW40K)		
Symmetric			Symmetric		
	Delivered Output (lm)	Intensity (Peak cd)		Delivered Output (lm)	Intensity (Peak cd)
10°x10°	1,876	25,025	10°x10°	3,783	50,453
10°x30°	1,773	9,209	10°x30°	3,575	18,568
10°x60°	1,784	5,658	10°x60°	3,598	11,407
10°x90°	1,785	3,858	10°x90°	3,598	7,779
30°x30°	1,751	4,141	30°x30°	3,530	8,350
30°x60°	1,737	2,262	30°x60°	3,503	4,561
30°x90°	1,578	1,608	30°x90°	3,181	3,243
60°x60°	1,717	1,413	60°x60°	3,461	2,850
90°x90°	1,678	971	90°x90°	3,383	1,958
30°x10°	1,679	8,271	30°x10°	3,384	16,675
60°x10°	1,724	5,229	60°x10°	3,476	10,543
60°x30°	1,720	2,558	60°x30°	3,468	5,158
90°x10°	1,530	3,070	90°x10°	3,085	6,190
W (120°)	1,323	466	W (120°)	2,667	940
Asymmetric			Asymmetric		
NAS	1,848	11,280	NAS	3,726	22,743
WW	1,783	2,931	WW	3,595	5,910
CAS	1,443	1,971	CAS	2,909	3,974

Based on MRGBW40K, full output, 48 in, DMX/RDM.


Based on MRGBW40K, full output, 48 in, DMX/RDM.

Photometric performance is measured in compliance with IESNA LM 79-08.


10x10, 10x30, 10x60, 10x90, 30x30, 30x60, 30x90, 60x60, 90x90, 30x10, 60x10, 60x30, 90x10, W, NAS and CAS optics tested with CL lens. WW optic tested with HFR lens.

Refer to Photometric Guide on Lumenpulse website for information on other color temperatures.

Color Point Information

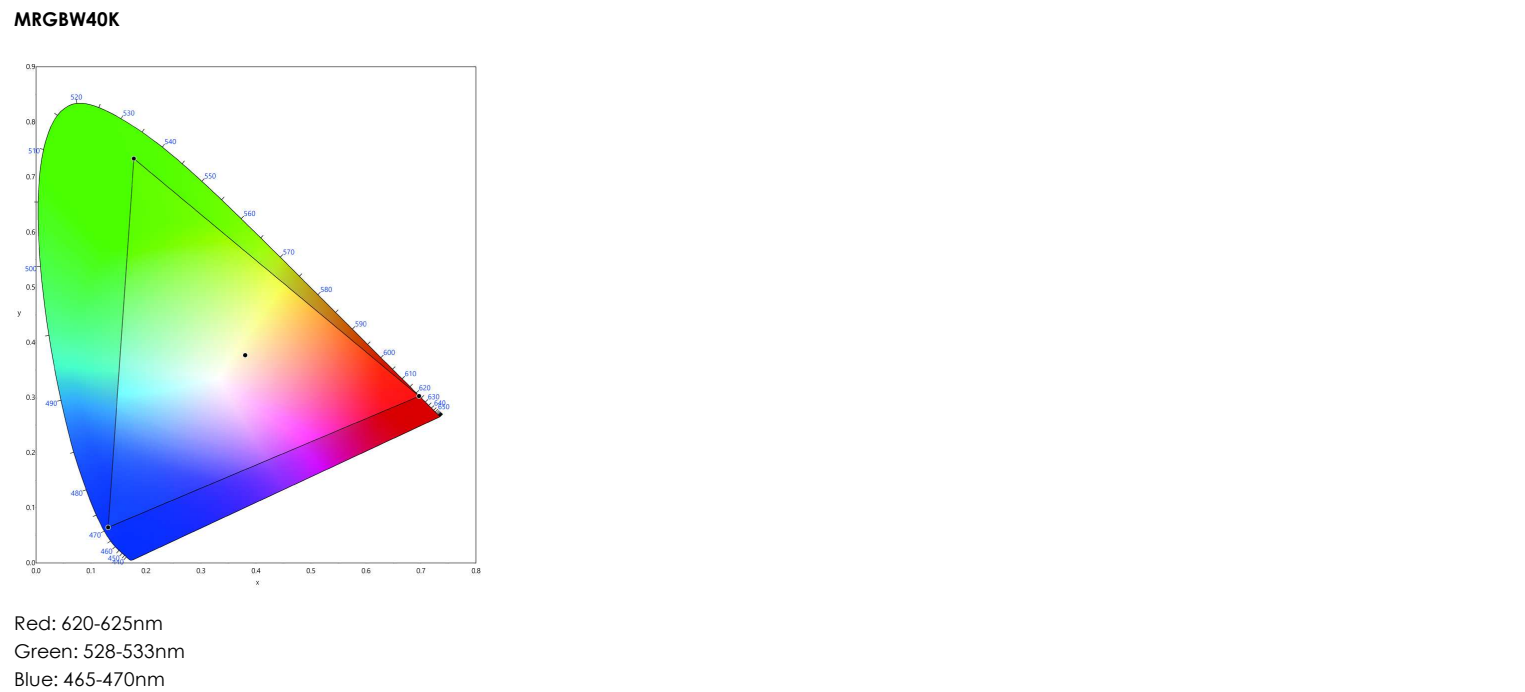

Mounting Bracket Placement (Minimum and Maximum Distances)

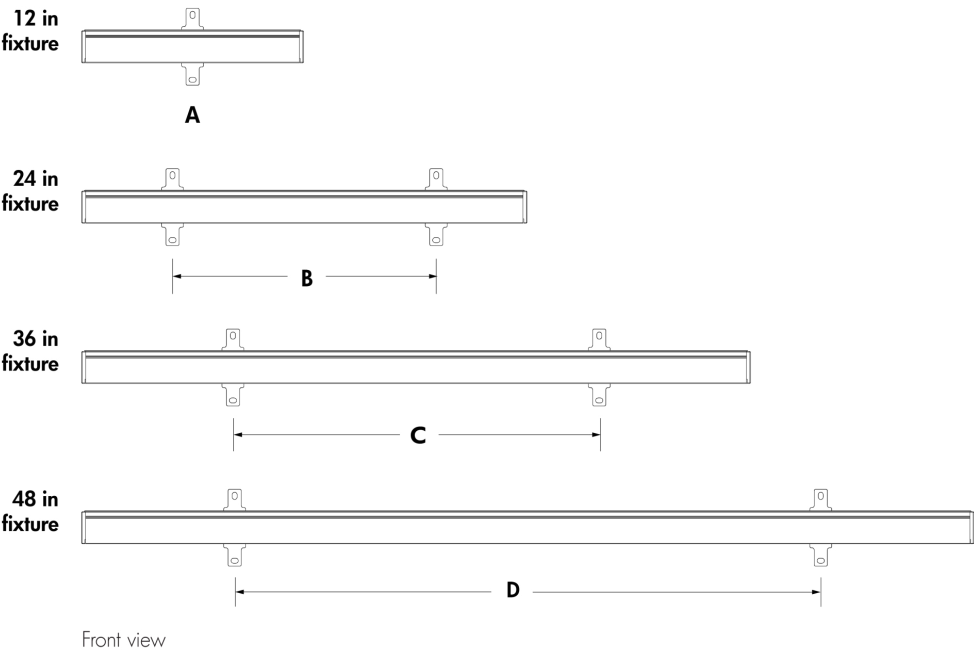


A - Bracket in the center of the fixture
B - Minimum 14 in to maximum 17 in
C - Minimum 20 1/2 in to maximum 23 1/2 in
D - Minimum 30 1/2 in to maximum 33 1/2 in
FXH mounting brackets shown.


The mounting bracket(s) must be centered on fixture and as symmetrical as possible. Distances must be respected for all installations.

Mounting Options

FXH - Fixed Mounting Horizontal



FXH - Mounting Hole Pattern




One mounting bracket provided for 12 in fixtures. Two mounting brackets provided for 24 in, 36 in and 48 in fixtures.


Weight of one FXH Mounting Bracket: 0.11 lbs.
Weight of two FXH Mounting Brackets: 0.22 lbs.

For proper hardware selection, use the dimensions of the mounting option, the weight and EPA values of the mounting option, and the weight and EPA values of the fixture and accessories for your engineering calculations.

SMH - Slim Adjustable Mounting Horizontal



SMH - Mounting Hole Pattern



No vibration rating. Not suitable for bridge and overpass applications.

One mounting bracket provided for 12 in fixtures. Two mounting brackets provided for 24 in, 36 in and 48 in fixtures.

Weight of one SMH Mounting Bracket: 0.26 lbs.



Weight of two SMH Mounting Brackets: 0.53 lbs.

Not suitable when fixture is exposed to wind.


For proper hardware selection, use the dimensions of the mounting option, the weight and EPA values of the mounting option, and the weight and EPA values of the fixture and accessories for your engineering calculations.

WMCH3 - Wall Mounting Horizontal Continuously Adjustable, 3.5 in to Optical Center

WMiH3 - Wall Mounting Horizontal Incrementally Adjustable by 6°, 3.5 in to Optical Center



WMCH3 WMiH3 - Mounting Hole Pattern



No vibration rating. Not suitable for bridge and overpass applications.


One mounting bracket provided for 12 in fixtures. Two mounting brackets provided for 24 in, 36 in and 48 in fixtures.

Weight of one WMCH3/WMiH3 Mounting Bracket: 0.62 lbs.

Weight of two WMCH3/WMiH3 Mounting Brackets: 1.23 lbs.


For proper hardware selection, use the dimensions of the mounting option, the weight and EPA values of the mounting option, and the weight and EPA values of the fixture and accessories for your engineering calculations.

WMCH6 - Wall Mounting Horizontal Continuously Adjustable, 6 in to Optical Center
WMiH6 - Wall Mounting horizontal Incrementally Adjustable by 6°, 6 in to Optical Center

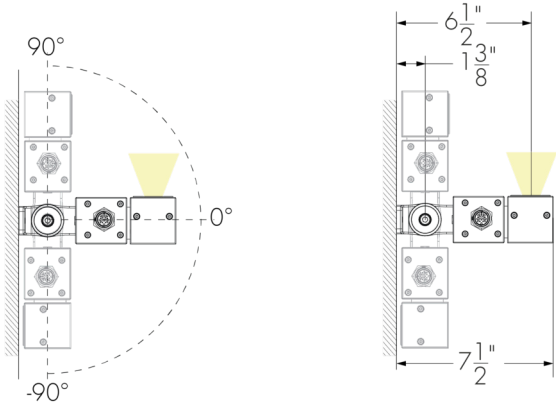

Weight of one WMCH6/WMiH6 Mounting Bracket: 0.62 lbs.
Weight of two WMCH6/WMiH6 Mounting Brackets: 1.23 lbs.

WMCH12 - Wall Mounting Horizontal Continuously Adjustable, 12 in to Optical Center
WMiH12 - Wall Mounting Horizontal Incrementally Adjustable by 6°, 12 in to Optical Center

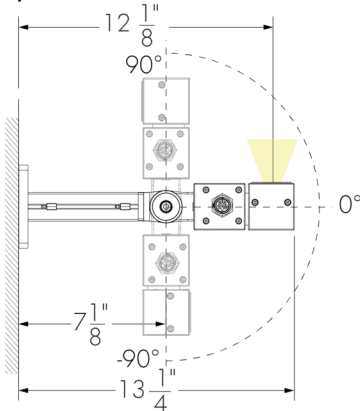


Weight of one WMCH12/WMiH12 Mounting Bracket: 1.5 lbs.
Weight of two WMCH12/WMiH12 Mounting Brackets: 3 lbs.


One mounting bracket provided for 12 in fixtures. Two mounting brackets provided for 24 in, 36 in and 48 in fixtures.

For proper hardware selection, use the dimensions of the mounting option, the weight and EPA values of the mounting option, and the weight and EPA values of the fixture and accessories for your engineering calculations.


WMCH6 WMiH6 - Mounting Hole Pattern



WMCH12 WMiH12 - Mounting Hole Pattern




WMCH18 - Wall Mounting Horizontal Continuously Adjustable, 18 in to Optical Center
WMIH18 - Wall Mounting Horizontal Incrementally Adjustable by 6°, 18 in to Optical Center

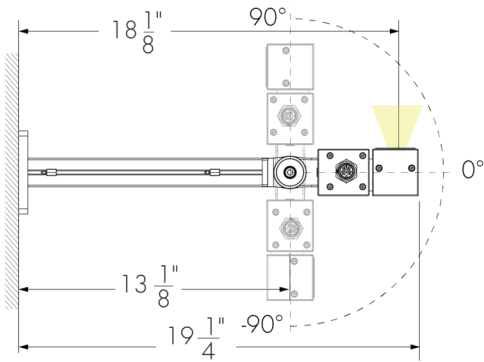


Weight of one WMCH18/WMIH18 Mounting Bracket: 2.09 lbs.
Weight of two WMCH18/WMIH18 Mounting Brackets: 4.19 lbs.

WMCH24 - Wall Mounting Horizontal Continuously Adjustable, 24 in to Optical Center
WMIH24 - Wall Mounting Horizontal Incrementally Adjustable by 6°, 24 in to Optical Center

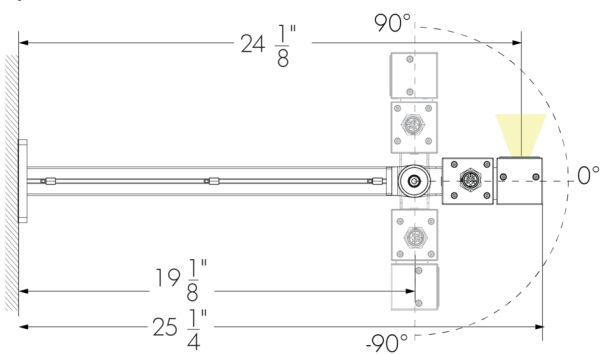


Weight of one WMCH24/WMIH24 Mounting Bracket: 2.65 lbs.
Weight of two WMCH24/WMIH24 Mounting Brackets: 5.29 lbs.

WMCH18 WMIH18 - Mounting Hole Pattern




WMCH24 WMIH24 - Mounting Hole Pattern



One mounting bracket provided for 12 in fixtures. Two mounting brackets provided for 24 in, 36 in and 48 in fixtures.

For proper hardware selection, use the dimensions of the mounting option, the weight and EPA values of the mounting option, and the weight and EPA values of the fixture and accessories for your engineering calculations.


Cable Management System For Wall Mounting Brackets

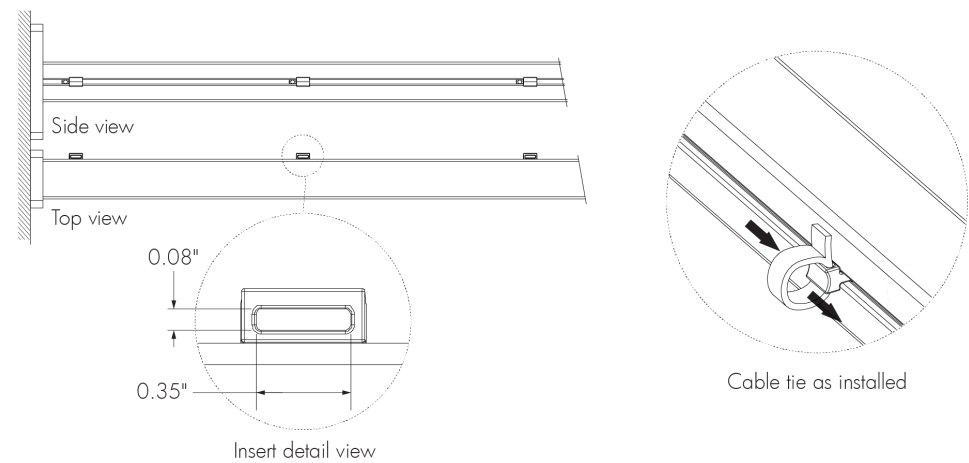

- 1 cable attachment provided for WMCH6 and WMiH6 mounting arms.
2 cable attachments provided for WMCH12, WMiH12, WMCH18 and WMiH18 mounting arms.
3 cable attachments provided for WMCH24 and WMiH24 mounting arms.
- Maximum cable tie size: 0.35 in width, 0.08 in thickness.
Cable ties for outdoor applications are recommended, provided by others.

Accessories

LV - Radial Louver

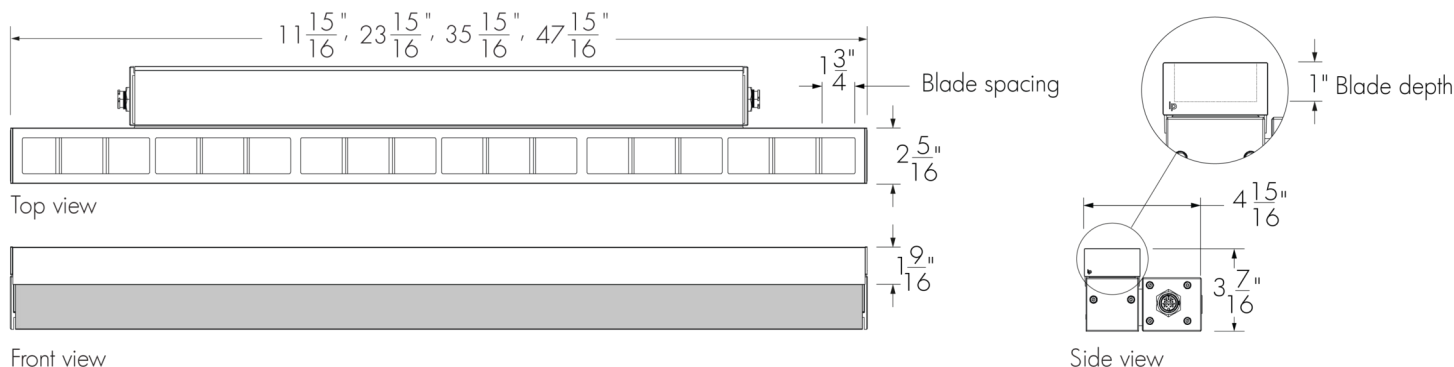


- A Radial Louver will affect beam distribution. Consult factory for application support.
- The Radial Louver is field installable. The Radial Louver can be combined with the Shield accessory; all other combinations are not possible.
- The exterior finish of the accessory will match the finish specified in the fixture order code (interior surface painted matte black).
- Not suitable for NAS, CAS and WW optics.
- Consult EPA Guide in the specification sheet for engineering calculations.

Weight of 12 in accessory: 0.65 lbs, and 24 in accessory: 1.25 lbs, weight of 36 in accessory: 1.75 lbs, weight of 48 in accessory: 2.3 lbs.

Note: the weight of the accessory is in addition to the weight of the fixture.

LVAS - Radial Louver Asymmetric

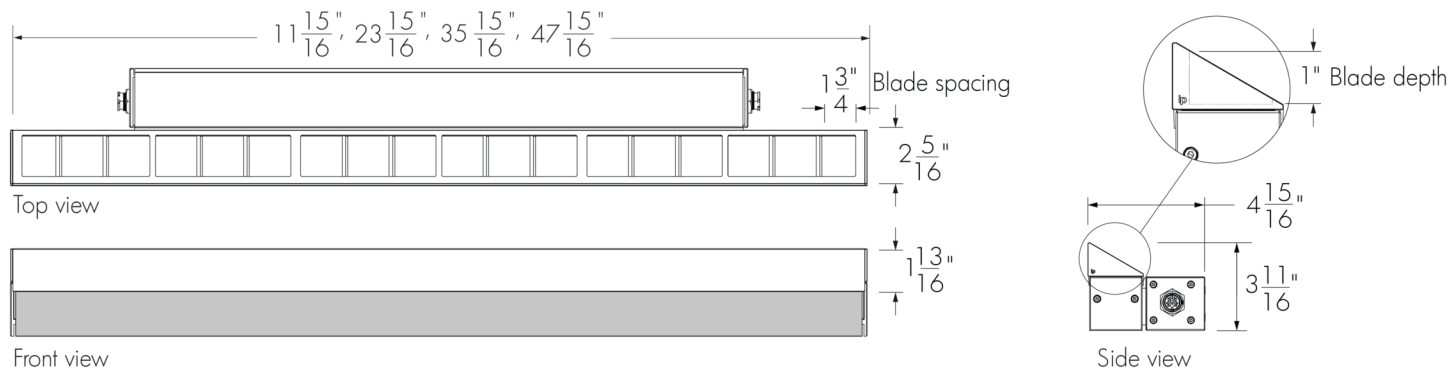


- A Radial Louver Asymmetric will affect beam distribution. Consult factory for application support.
- The Radial Louver Asymmetric is field installable. The Radial Louver Asymmetric can be combined with the Shield accessory; all other combinations are not possible.
- The exterior finish of the accessory will match the finish specified in the fixture order code (interior surface painted matte black).
- Consult EPA Guide in the specification sheet for engineering calculations.

Weight of 12 in accessory: 0.5 lbs, weight of 24 in accessory: 1 lbs, weight of 36 in accessory: 1.3 lbs, weight of 48 in accessory: 1.7 lbs.

Note: the weight of the accessory is in addition to the weight of the fixture.

VS - Visor

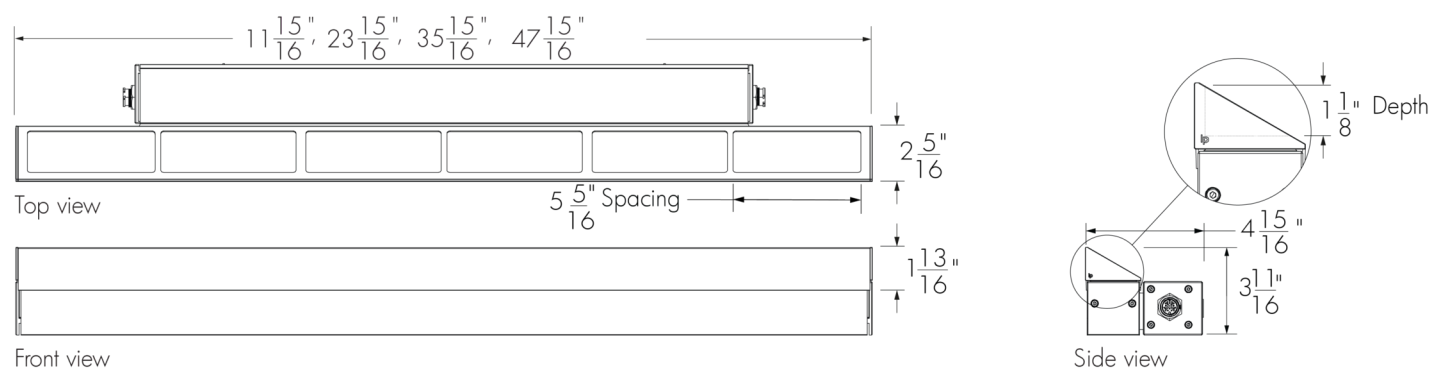

- A Visor will affect beam distribution. Consult factory for application support.
- The Visor is field installable. The Visor can be combined with the Shield accessory; all other combinations are not possible.
- The exterior finish of the accessory will match the finish specified in the fixture order code with the exception of the inside surface of the Visor end caps, which are painted the same colour as the fixture. Interior surface painted matte black.
- Consult EPA Guide in the specification sheet for engineering calculations.

Weight of 12 in accessory: 0.4 lbs, weight of 24 in accessory: 0.8 lbs, weight of 36 in accessory: 1.2 lbs, weight of 48 in accessory: 1.5 lbs.

Note: the weight of the accessory is in addition to the weight of the fixture.


Lens and Optics Combinations Table

Lens/Optics	10x10	10x30	10x60	10x90	30x30	30x60	30x90	60x60	90x90	30x10	60x10	60x30	90x10	W	NAS	WW	CAS
CL Clear Lens	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✗	✓
HFR Half-Frosted Lens	✓	✓	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	✓	✗
FR Frosted Lens	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

- ✓ Lens option
- ✗ Not available


Half-Frosted Lens Details

Left Feeding Side

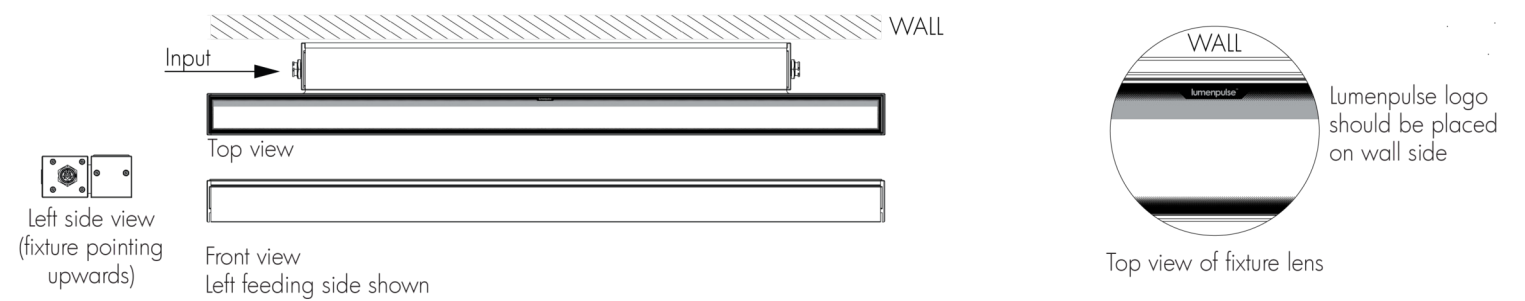



- Position frosted side of the lens and Lumenpulse logo along the wall.
- Fixture's feeding side is based on uplight installations. Feeding sides are reversed when fixture is used in a downlight application.

Right Feeding Side

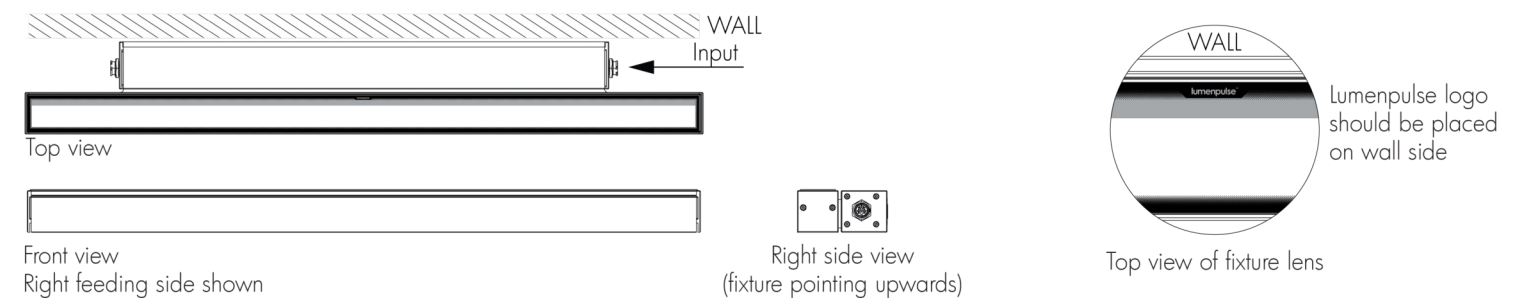


- Position frosted side of the lens and Lumenpulse logo along the wall.
- Fixture's feeding side is based on uplight installations. Feeding sides are reversed when fixture is used in a downlight application.

Ceiling Asymmetric Optic Details

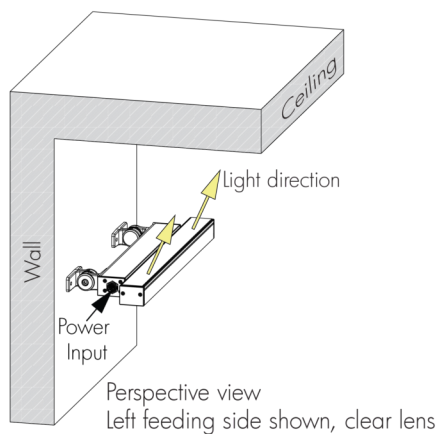



Top view of fixture lens

Lumenpulse logo should be placed on wall side

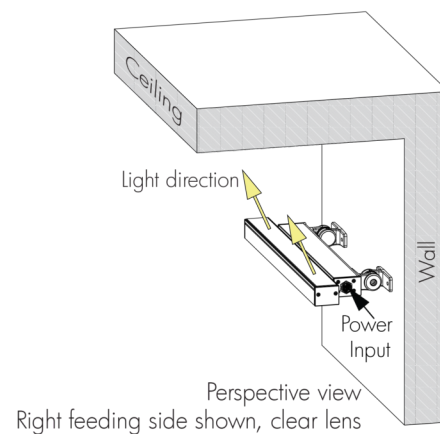


- Always position Lumenpulse logo on lens along the wall.
- Fixture's feeding side is based on uplight installations. Feeding sides are reversed when fixture is used in a downlight application.
- **Ceiling Asymmetric optic guidelines:** 18 in minimum setback, 1:5 setback/canopy depth ratio (based on CL lens).

Narrow Asymmetric and Asymmetric Wallwash Optics Details

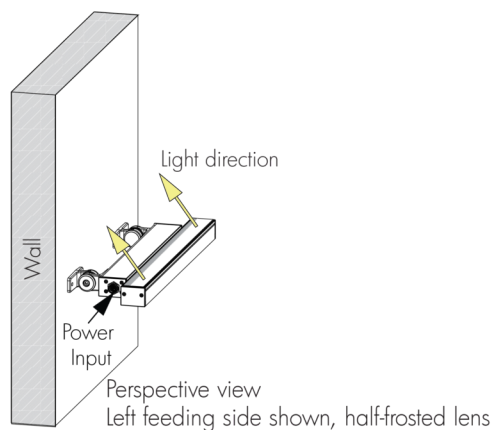




Top view of fixture lens

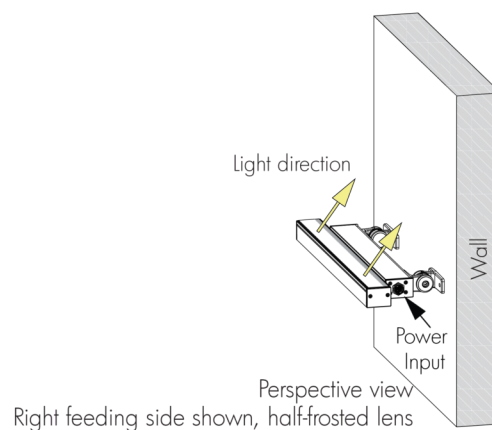Lumenpulse logo should be placed on wall side






- Position frosted side of the lens and Lumenpulse logo along the wall.
- Fixture's feeding side is based on uplight installations. Feeding sides are reversed when fixture is used in a downlight application.
- **Narrow Asymmetric optic guidelines:** 12 in minimum setback, 1:10 setback ratio (based on HFR lens).
- **Asymmetric Wallwash optic guidelines:** 6 in minimum setback, 1:8 setback ratio (based on HFR lens).

EPA Guide - Fixture




	12 in	24 in	36 in	48 in
EPA Top (sq ft) 	0.403	0.928	1.333	1.858
EPA Front (sq ft) 	0.241	0.483	0.726	0.968
EPA Side (sq ft) 	0.099	0.099	0.099	0.099

EPA Guide - Fixture with Accessory




Fixture With Radial Louver Accessory

	12 in	24 in	36 in	48 in
EPA Top (sq ft) 	0.403	0.928	1.333	1.858
EPA Front (sq ft) 	0.367	0.736	1.105	1.474
EPA Side (sq ft) 	0.138	0.138	0.138	0.138








Fixture With Radial Louver Asymmetric Accessory

	12 in	24 in	36 in	48 in
EPA Top (sq ft) 	0.403	0.928	1.333	1.858
EPA Front (sq ft) 	0.379	0.760	1.141	1.522
EPA Side (sq ft) 	0.122	0.122	0.122	0.122

Fixture With Visor Accessory


	12 in	24 in	36 in	48 in
EPA Top (sq ft) 	0.403	0.928	1.333	1.858
EPA Front (sq ft) 	0.379	0.760	1.141	1.522
EPA Side (sq ft) 	0.122	0.122	0.122	0.122

EPA Guide - Mounting Option


EPA Top/Side (sq ft)		
FXH	N/A	
SMH	0.01	
WMCH3 WMiH3	0.04	
WMCH6 WMiH6	0.05	
WMCH12 WMiH12	0.15	
WMCH18 WMiH18	0.22	
WMCH24 WMiH24	0.30	

Resolution Details

DMX/RDM Control, Resolution Per Foot: Each 12 in Section is Addressed Independently
DMX Addresses:

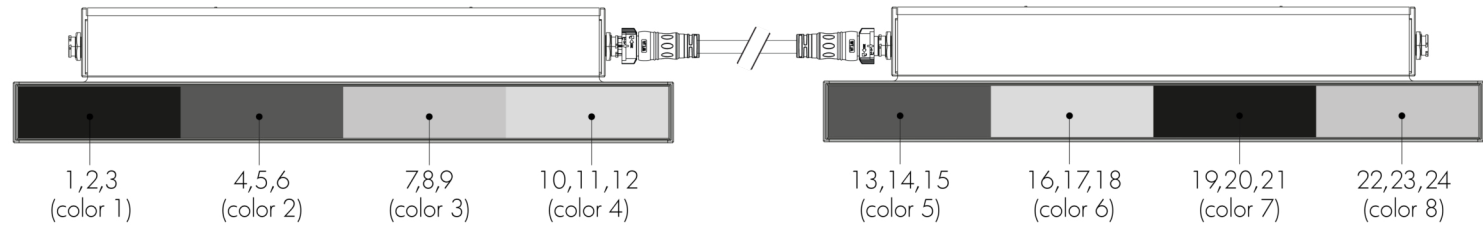


MRGB color mixing option

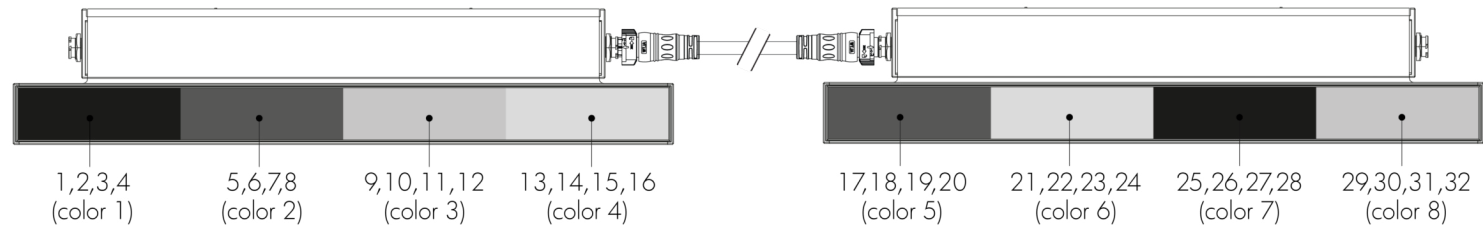


MRGBW, MRGBA color mixing options

DMX/RDM Control, Resolution Per Fixture: Each Fixture is Addressed Independently
DMX Addresses:

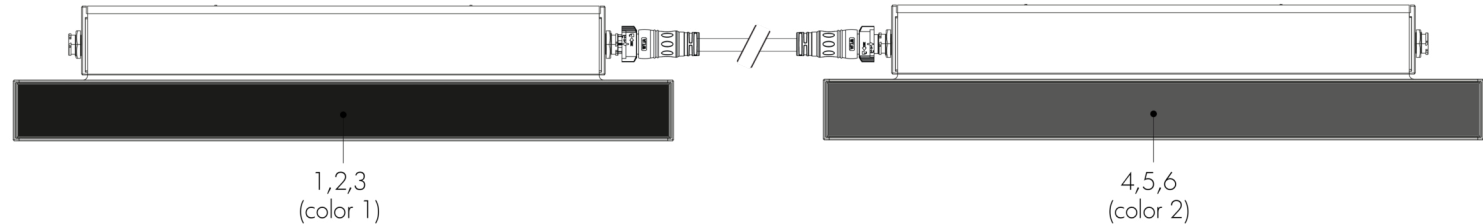

MRGB color mixing option

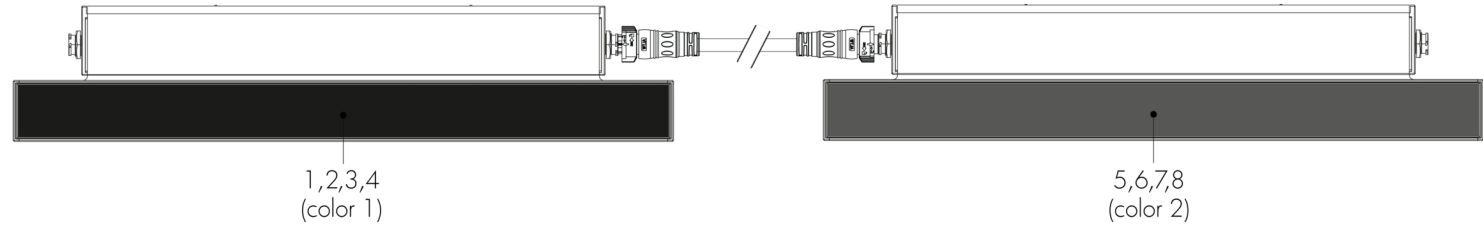

MRGBW, MRGBA color mixing options

- 48 in fixtures shown.
- Applicable for DMX/RDM control option only. Fixture resolution can be configured on-site within the LumenID V3 software. A DMX/RDM enabled CBX is required.

Wiring Color Code

DALIT8 and LT Control (XC3P2D)

UL Color Code	Use
Green	Ground
Black	Line
White	Neutral
Purple	0-10V + / Data +
Orange	0-10V - / Data -

DMX/RDM Control (XC3P3D)

UL Color Code	Use
Green	Ground
Black	Line
White	Neutral
Red	Data +
Orange	Data -
Gray	Signal Common

Maximum Fixture Run Length Table

DMX/RDM Control (DMX/RDM)

Lumenfacade Max 10W/ft

Voltage	120V	230V	277V
Maximum Run of Fixtures	112ft	128ft	128ft


Lumenfacade Max 22W/ft

Voltage	120V	230V	277V
Maximum Run of Fixtures	64ft	128ft	128ft

Based on 48 in fixtures, DMX/RDM control, 25 ft leader cable for an end-to-end run with 2 ft jumper cables between fixtures. Refer to Typical Wiring Diagrams for Control Protocol specific run length rules.


Typical Wiring Diagrams

Star Layout (DMX/RDM)

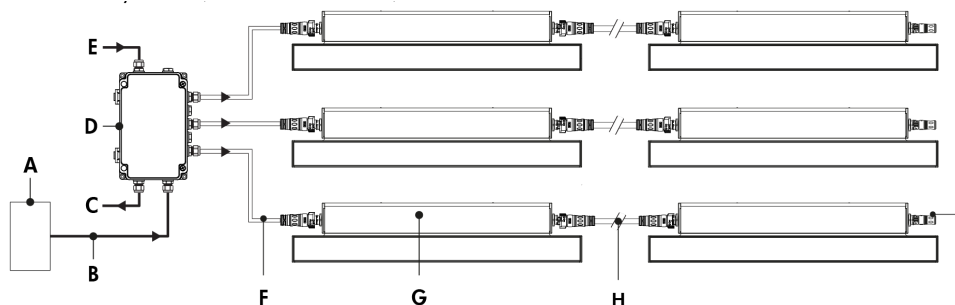

- A** - Third-party DMX/RDM controller
- B** - Data input (Belden 9841 or equivalent, by others)
- C** - Data output to next CBX (optional, not isolated/not boosted)
- D** - CBX-ST
- E** - Power input (120 to 277V, wiring by others)
- F** - Leader Cable (LFLC XC3P3D)
- G** - Lumenfacade Max Continuous Horizontal (LFM-CH)
- H** - Jumper Cable (LFJC XC3P3D)
- I** - DMX/RDM Terminator

Daisy Chain Layout (DMX/RDM)

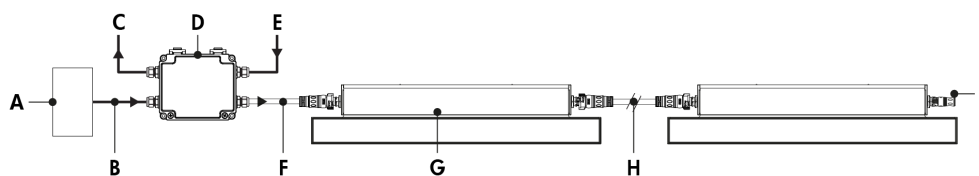


- A** - Third-party DMX/RDM controller
- B** - Data input (Belden 9841 or equivalent, by others)
- C** - Data output to next CBX (optional, not isolated/not boosted)
- D** - CBX-DS
- E** - Power input (120 to 277V, wiring by others)
- F** - Leader Cable (LFLC XC3P3D)
- G** - Lumenfacade Max Continuous Horizontal (LFM-CH)
- H** - Jumper Cable (LFJC XC3P3D)
- I** - DMX/RDM Terminator

Refer to installation instructions for additional wiring details.

- Consult CBX installation instructions for additional wiring details.
- 1000 ft maximum DMX/RDM "Bus" length.
- 1 DMX universe = 128 @ 4-channel controllable segments.
- Fixtures set to control RGBW by Foot Resolution are limited to 128 ft of product or the fixture run voltage drop limitations, whichever limit is reached first.
- Fixtures set to control RGBW by Fixture Resolution are limited to 128 fixtures (12 in, 24 in, 36 in or 48 in lengths) or the fixture run voltage drop limitations, whichever limit is reached first.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 6 outputs per CBX-ST; maximum of 1 output per CBX-DS.

DALI 2 T8 (DALIT8)

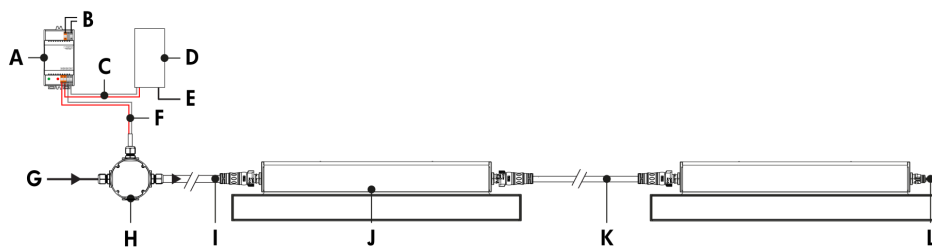


- A** - DALI bus power supply (by others)
- B** - Power input for DALI bus power supply (wiring by others)
- C** - Data output to DALI controller (wiring by others)
- D** - DALI controller (by others)
- E** - Power input for DALI controller (if required, wiring by others)
- F** - Data output to fixture (wiring by others)
- G** - Power input (120 to 277V, wiring by others)
- H** - Junction box (by others)
- I** - Leader Cable (LFLC XC3P2D)
- J** - Lumenfacade Max Continuous Horizontal (LFM-CH)
- K** - Jumper Cable (LFJC XC3P2D)
- L** - Sealing End Cap

- 64 DALI addressable device limitation (each fixture is an addressable device).
- DALI does not allow for control by foot, only by fixture.
- Commissioning may be required based on the selection of 3rd party DALI controller. Controller and commissioning provided by others.
- Less than 1% minimum dimming value.

Refer to installation instructions for additional wiring details and wiring diagram with Lumenfacade T-Junction accessory.

Lumentalk (LT)

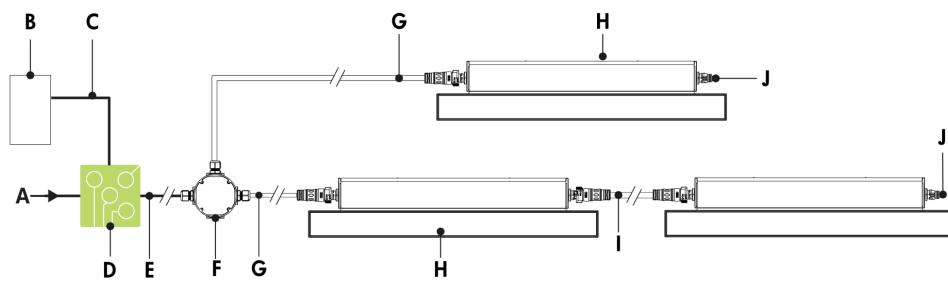


- A** - Power input (120 to 277V, wiring by others)
- B** - DMX/RDM controller (order separately from Lumenpulse, or by others)
- C** - Data wiring (by others)
- D** - Lumentranslator 2 (LTL2-DMX)
- E** - Power wiring (by others)
- F** - Junction box (by others)
- G** - Leader cable (LFLC XC3P2D)
- H** - Lumenfacade Max Continuous Horizontal (LFM-CH)
- I** - Jumper cable (LFJC XC3P2D)
- J** - Sealing End Cap

Refer to installation instructions for additional wiring details and wiring diagram with Lumenfacade T-Junction accessory.

- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- For DMX applications: 1 DMX controller per Lumentalk network, maximum of 48 DMX channels per Lumentalk network (minimum step transition update rate is 1 second, minimum fade time between two colors is 1 minute). Consult factory for applications that require additional capabilities.
- Maximum of 1 transmitter (Lumentranslator or Lumenlink) per system.
- No third-party fixtures allowed on the same circuit.
- Consult factory for DALI Lumentalk applications.


Leader Cable (Order Separately)

LFLC - Lumenfacade Leader Cable (XC3P2D)

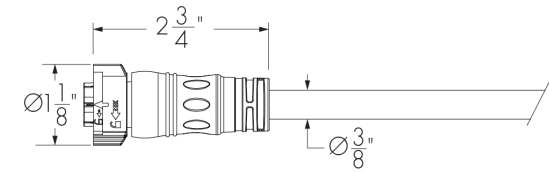

UL version shown. Consult European specification sheet for CE cable details.

LFLC - Lumenfacade Leader Cable (XC3P3D)

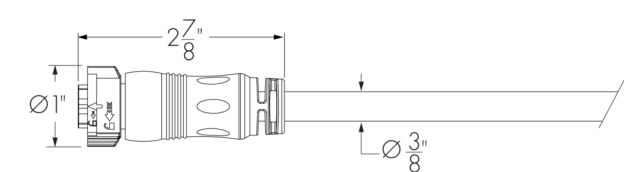

UL version shown. Consult European specification sheet for CE cable details.

LFLC-TYPE-CERTIFICATION-VOLTAGE-LENGTH-CONNECTOR/CABLE TYPE-CONNECTOR SHAPE-CABLE/CONNECTOR COLOR

Please specify:

DALIT8, LT applications:

TYPE: CR/CH (Continuous Run or Continuous Horizontal); **CERTIFICATION:** UL or CE; **VOLTAGE:** 120_277; **LENGTH:** 10 ft, 25 ft, 50 ft, 100 ft, 150 ft or 200 ft; **CONNECTOR/CABLE TYPE:** XC3P2D (5x 16AWG X-lock size); **CONNECTOR SHAPE:** 180D (Straight Connector) or 90D (90° Angle Connector); **CABLE/CONNECTOR COLOR:** BK (Black) or WH (White) (connectors are the same color as the specified cable color).

A waterproof sealing end cap is mandatory for any unused connector. One (1) included with every CR/CH XC3P2D Leader Cable.


DMX/RDM applications:

TYPE: CR/CH (Continuous Run or Continuous Horizontal); **CERTIFICATION:** UL or CE; **VOLTAGE:** 120_277; **LENGTH:** 10 ft, 25 ft, 50 ft, 100 ft, 150 ft or 200 ft; **CONNECTOR/CABLE TYPE:** XC3P3D (3x14AWG + 3x24AWG X-lock C-size); **CONNECTOR SHAPE:** 180D (Straight Connector); **CABLE/CONNECTOR COLOR:** BK (Black) or WH (White) (connectors are the same color as the specified cable color).

- Consult Lumenfacade Leader cable specification sheet for all available cable lengths and additional information.


Jumper Cable (Order Separately)

LFJC - Lumenfacade Jumper Cable (XC3P2D)

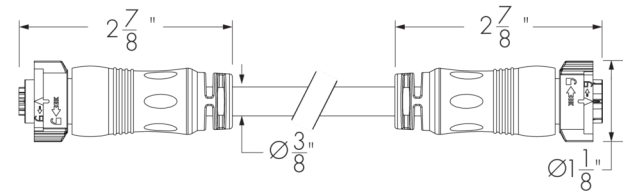


UL version shown. Consult European specification sheet for CE cable details.

LFJC - Lumenfacade Jumper Cable (XC3P3D)

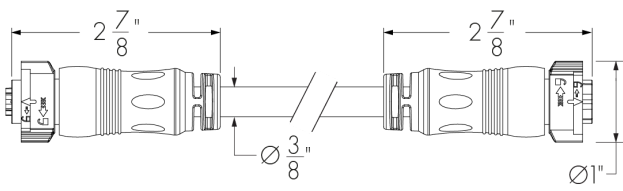

UL version shown. Consult European specification sheet for CE cable details.

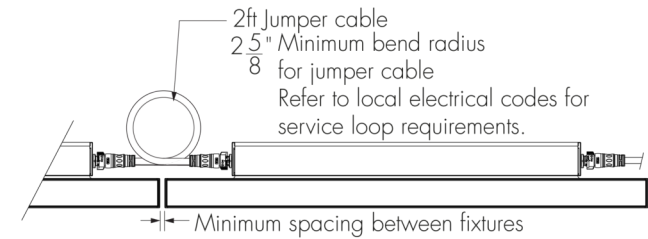

LFJC-CERTIFICATION-VOLTAGE-LENGTH-CONNECTOR/CABLE TYPE-CONNECTOR SHAPE-CABLE/CONNECTOR COLOR


Please specify:

CERTIFICATION: UL or CE; **VOLTAGE:** 120_277; **LENGTH:** 1 ft, 2 ft, 5 ft, 10 ft, 25 ft or 50 ft; **CONNECTOR/CABLE TYPE:** XC3P2D (5x 16AWG X-lock size) or XC3P3D (3x14AWG + 3x24AWG X-lock C-size); **CONNECTOR SHAPE:** 180D (straight connector); **CABLE/CONNECTOR COLOR:** BK (Black) or WH (White) (connectors are the same color as the specified cable color).

- Suitable for dimming/data and non-dimming applications.
- Consult Lumenfacade Jumper Cable specification sheet for additional information.
- For closely spaced fixtures, a minimum jumper cable length of 2 ft is recommended to accommodate a cable loop between fixtures.
- Minimum spacing for 36 in and 48 in fixtures in a row: 0.35 in.
- Minimum spacing for 12 in and 24 in fixtures at the end of a fixture run, next to 36 in and 48 in fixtures: 0.35 in.
- Minimum spacing for 12 in and 24 in fixtures in a row: 2.75 in.
- Minimum bend radius 2.56 in.

T-Junction (Order Separately)

LFTJ - Lumenfacade T-Junction (XC3P2D)
Available For DALI18 and LT Control Options Only

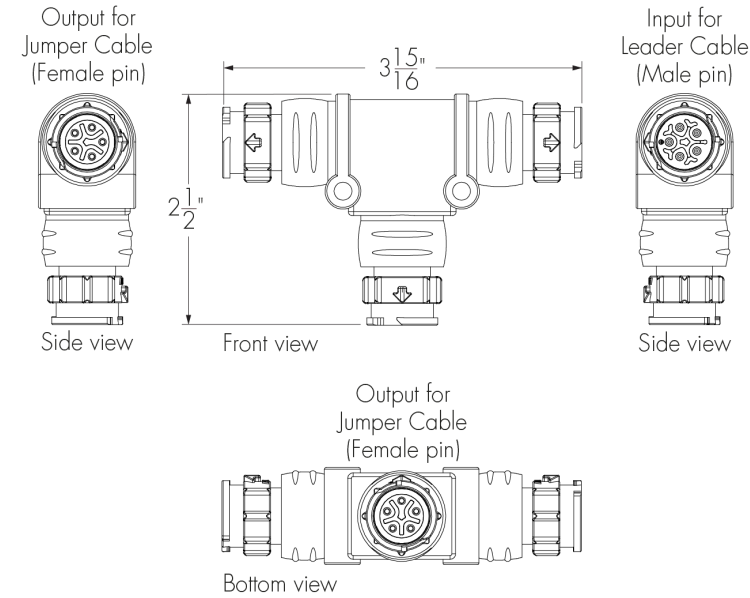

LFTJ-CONNECTOR/CABLE TYPE-CABLE/CONNECTOR COLOR

Please specify:

CONNECTOR/CABLE TYPE: XC3P2D (5x 16AWG X-lock size); **CABLE/CONNECTOR COLOR:** BK (Black) or WH (White).

- Suitable for dimming/data and non-dimming applications with LFM fixtures.
- Consult factory for guidelines on the use of T-Junctions in a fixture run.
- Consult Lumenfacade T-Junction specification sheet for additional information.
- The T-Junction accessory can be used to connect a feed input, with a throughput to a localized run of fixtures and an output to the rest of your installation.
- Waterproof sealing end cap is mandatory for any unused connector. One (1) included with every T-Junction accessory.


Control Systems (Order Separately)

LTN2 - Lumentone™ 2



Lumentone 2 is a simple pre-programmed DMX 512 controller with a push button rotary dial and live feedback.


PHAROS - Pharos® Kit

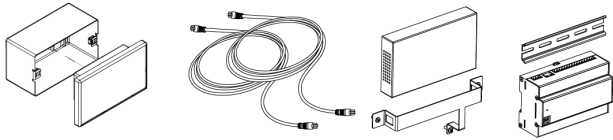

The Pharos kit, available for 1 or 2 DMX universes, allows for complete control of large lighting installations. 2 DMX universes kit shown.


Control Boxes (Order Separately)

CBX-DMX/RDM - DMX/RDM Enabled (Daisy Chain or Star Configuration)

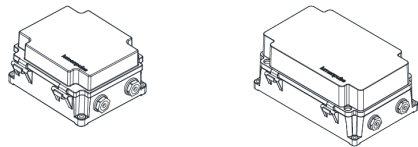

DMX/RDM control box. Up to six power and data outputs to fixtures or fixture runs. Consult CBX specification sheet and installation instructions for details. Lumenterminators provided with CBX (2x for daisy chain configuration, 6x for star configuration), consult factory to order spares.


CBX-ENET - Ethernet Enabled (Daisy Chain or Star Configuration)

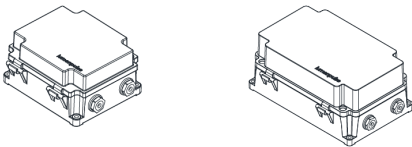

Ethernet control box. Up to four power and data outputs to fixture or fixture runs. Consult Ethernet CBX specification sheet and installation instructions for details.

Diagnostic And Addressing Tools (Order Separately)

LID - LumenID



LumenID is a diagnostic and addressing DMX/RDM tool. It must be specified on all DMX applications. Consult LID specification sheet for details.

LID-LT - LumentalkID



LumentalkID is a diagnostic and addressing tool. It must be specified for all Lumentalk (LT) applications. Consult LID-LT specification sheet for details.

How to Order

Housing	Type	Certification	Voltage	Length	Wattage	Color and Color Temperature	Optic	Lens	Feeding Side
LFM Lumenfacade Max	CH Continuous Horizontal	UL UL Compliant ⁽¹⁾ CE CE Compliant (Class I) ⁽²⁾ ⁽³⁾	120_277 120 volts to 277 volts ⁽⁴⁾ 230 220 to 240 volts ⁽⁵⁾	12 12 in ⁽⁴⁾ ⁽⁶⁾ 24 24 in 36 36 in 48 48 in	10W 10 W/ft 22W 22 W/ft	MRGB Opticolor with MRGB ⁽⁷⁾ MRGBW27K Opticolor with MRGBW 2700K CRI 80 ⁽⁷⁾ MRGBW30K Opticolor with MRGBW 3000K CRI 80 ⁽⁷⁾ MRGBW35K Opticolor with MRGBW 3500K CRI 80 ⁽⁷⁾ MRGBW40K Opticolor with MRGBW 4000K CRI 80 ⁽⁷⁾ MRGBA Opticolor with MRGB+ Phosphor Converted Amber (PC Amber) ⁽⁷⁾	10x10 10° x 10° ⁽⁸⁾ 10x30 10° x 30° 10x60 10° x 60° 10x90 10° x 90° 30x30 30° x 30° ⁽⁹⁾ 30x60 30° x 60° ⁽⁹⁾ 30x90 30° x 90° ⁽⁹⁾ 60x60 60° x 60° ⁽⁹⁾ 90x90 90° x 90° ⁽⁹⁾ 30x10 30° x 10° ⁽⁹⁾ 60x10 60° x 10° ⁽⁹⁾ 60x30 60° x 30° ⁽⁹⁾ 90x10 90° x 10° ⁽⁹⁾ W Wide 120° ⁽⁹⁾ NAS Narrow Asymmetric WW Asymmetric Wallwash ⁽¹⁰⁾ CAS Ceiling Asymmetric ⁽⁹⁾	CL Clear Lens HFR Half-Frosted Lens FR Frosted Lens	LF Left Feeding Side RF Right Feeding Side

Notes:

1. Available for 120_277 voltage option only.

2. Available for 230 voltage option only.

3. Available for 24 in, 36 in and 48 in fixture lengths only.

4. Available for UL certification only.

5. Available for CE certification only.

6. The 12 in length is available for 120_277V voltage option only.
7. Fixtures are shipped from the factory in Normal Mode. Optidrive™ Mode can be activated onsite for DMX/RDM and LT fixtures. For DMX/RDM applications, Optidrive Mode requires a LumenID, LumenID software and onsite commissioning. For LT applications, Optidrive Mode requires a LumentalkID, LumentalkID software and onsite commissioning.

8. For best results use a minimum 6 in setback from surface. Contact factory for application support.

9. Can be combined with a CL or FR lens only.

10. Can be combined with a HFR or FR lens only.

How to Order

Control	Vibration Rating	Mounting Option ⁽¹⁸⁾	Environment	Finish	Accessories ⁽²⁸⁾ ⁽²⁹⁾	Buy American Act
DMX/RDM DMX/RDM Enabled ⁽¹¹⁾ ⁽¹²⁾ DALI28 DALI 2 T8 Control ⁽¹²⁾ ⁽¹³⁾ LT Lumentalk ⁽¹²⁾ ⁽¹⁴⁾	NVR No Vibration Rating Required ⁽¹⁵⁾ VRN Vibration Rated for Normal Applications ⁽¹⁶⁾ VRBO Vibration Rated for Bridge and Overpass ⁽¹⁷⁾	SMH Slim Adjustable Mounting Horizontal Continuously Adjustable (100° Pivot Limit) ⁽¹⁹⁾ ⁽²⁰⁾ FXH Fixed Mounting Horizontal (0° Pivot Limit) ⁽²¹⁾ WMCH3 Wall Mounting Horizontal Continuously Adjustable, 3.5 in to Optical Center (120° Pivot Limit) ⁽¹⁹⁾ ⁽²⁰⁾ WMIH3 Wall Mounting Horizontal Incrementally Adjustable by 6°, 3.5 in to Optical Center (120° Pivot Limit) ⁽¹⁹⁾ ⁽²⁰⁾ WMCH6 Wall Mounting Horizontal Continuously Adjustable, 6 in to Optical Center (180° Pivot Limit) ⁽²⁰⁾ WMIH6 Wall Mounting Horizontal Incrementally Adjustable by 6°, 6 in to Optical Center (180° Pivot Limit) ⁽²¹⁾ WMCH12 Wall Mounting Horizontal Continuously Adjustable, 12 in to Optical Center (180° Pivot Limit) ⁽²⁰⁾ ⁽²²⁾ WMIH12 Wall Mounting Horizontal Incrementally Adjustable by 6°, 12 in to Optical Center (180° Pivot Limit) ⁽²³⁾ WMCH18 Wall Mounting Horizontal Continuously Adjustable, 18 in to Optical Center (180° Pivot Limit) ⁽²⁰⁾ ⁽²²⁾ WMIH18 Wall Mounting Horizontal Incrementally Adjustable by 6°, 18 in to Optical Center (180° Pivot Limit) ⁽²³⁾ WMCH24 Wall Mounting Horizontal Continuously Adjustable, 24 in to Optical Center (180° Pivot Limit) ⁽¹⁹⁾ ⁽²⁰⁾ WMIH24 Wall Mounting Horizontal Incrementally Adjustable by 6°, 24 in to Optical Center (180° Pivot Limit) ⁽¹⁹⁾ ⁽²⁰⁾	XD Extra durable multi-step finish ⁽²⁴⁾	BK Black Sandtex® BRZ Bronze Sandtex® SI Silver Sandtex® WH Smooth White BKTX Textured Black BRZTX Textured Bronze Non-Metallic GRATX Textured Medium Gray GRNTX Textured Green WHTX Textured White CC Custom Color & Finish ⁽²⁵⁾ ⁽²⁶⁾ ⁽²⁷⁾	NA No accessory LV Radial Louver ⁽³⁰⁾ LVAS Radial Louver Asymmetric VS Visor	BAA Buy American ⁽⁴⁾ ⁽³¹⁾

Notes:

4. Available for UL certification only.

11. A Control Box (CBX) and LumenID (LID) must be specified.

12. Minimum dimming value is less than 1%.

13. DALI 2 T8 controller required, provided by others. DALI2 T8 control uses a single DALI short address.

14. A Lumentranslator 2 (LT2) and LumentakID (LIDLT) must be specified for Lumentalk applications. Consult Lumentranslator 2 and Lumentalk pages and specification sheets for details.

15. Available for all mounting options.

16. Available for FXH, WMCH6, WMIH6, WMCH12, WMIH12, WMCH18 and WMIH18 mounting options.

17. Available for FXH, WMIH6, WMIH12 and WMIH18 mounting options.

18. One mounting bracket provided for 12 in fixtures. Two mounting brackets provided for 24 in, 36 in and 48 in fixtures.

19. Available with NVR vibration rating only.

20. Not suitable for bridge and overpass applications.

21. Vibration tested in accordance with ANSI 136.31 2018 at 2.3Gv.
22. Vibration tested in accordance with ANSI 136.31 2018 at 2.3Gv.

23. Vibration tested in accordance with ANSI 136.31 2018 at 4.6Gv.

24. Zirconium pretreatment completed with corrosion-resistant primer and electrostatically-applied powder coat paint finish.

25. Lumenpulse offers a wide selection of RAL CLASSIC (K7) colors with a smooth texture and high-gloss finish. Please consult factory for a list of available K7 colors, other RAL textures and glosses, or to match alternate color charts. Final color matching results may vary.

26. Setup charges apply for RAL colors. Consult factory for details.

27. Longer lead times can be expected for custom RAL color finishes.

28. Maximum one accessory per fixture.

29. The exterior finish of the accessory will match the finish specified in the fixture order code (interior surface painted matte black).

30. Available for 10x10, 10x30, 10x60, 10x90, 30x30, 30x60, 30x90, 60x60, 90x90, 30x10, 60x10, 60x30, 90x10 and W optics only.

31. Contact your Lumenpulse Sales Representative for more information on order volume details.