


Project Name

Qty

Type


Catalog / Part Number

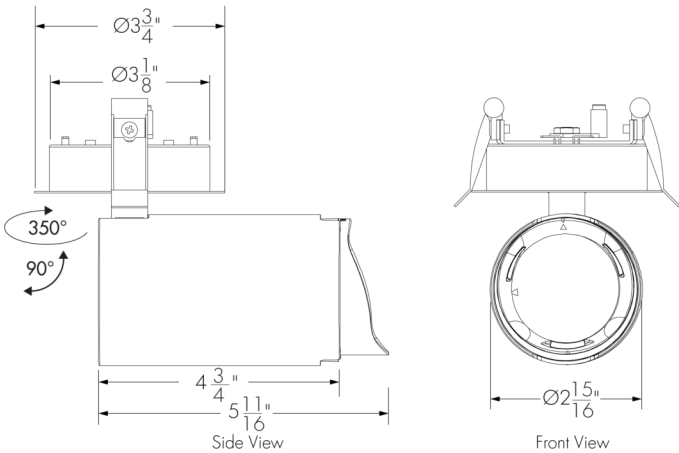

Photometric Summary

Consult the Photometric Information section of the Specification Sheet for 3000K CRI 92 data. For all other configurations, consult IES files on the Lumenpulse website.

Color and Color Temperature



Color Rendering

CRI 92 CRI 98

Control

ON/OFF 0-10V Phase Dimming

Finish



Description

The Exenia REVO SPOT SEMI-RECESSED Compact Wallwash is a unique cross between downlight and track light. It brings extra flexibility to the REVO family, allowing 90 degrees of tilt and 355 degrees of rotation.

Features


Output (Nominal Lumens)	L10: 1000 lm L13: 1300 lm
Color and Color Temperature	27K: 2700K 30K: 3000K 35K: 3500K 40K: 4000K
Output (Nominal Lumens)	1000 lm, 1300 lm
Finish	MWHTX: Matte White Txt MBKTX: Matte Black Txt CGY: Concrete Gray MDB: Mud Brown GTX: Gold Txt CTX: Copper Txt
Optic (Nominal Distribution)	DW: Deep Washer
Installation Type	RM: Remodel Non-Insulated Ceiling (Non-Plenum Rated) NC: New Construction Non-Insulated Ceiling (Non-Plenum Rated) IC: Insulation Contact Mounting (Can be Used for Plenum Contact, and Air-Tight Mounting Box Applications)
Warranty	5-year limited warranty
Performance	
Maximum Delivered Output	Up to 1,578 lm (L13, CRI 92, 40K, DW)
Maximum Delivered Intensity	3,660 cd at nadir (L13, CRI 92, 40K, DW)

Trim Shape



Round

Adjustability



Lumencycle™ Program



Certifications



Efficacy	Up to 85 lm/W (L10, CRI 92, 40K, DW)
Color Rendering	92: CRI 92 98: CRI 98
Color Consistency	2 SDCM
Lumen Maintenance	L70 120,000 hours L95 19,000 hours

Physical

Housing Material	Die cast aluminum
Optics Material	Polymethyl methacrylate (PMMA)
Adjustability	350° Rotation, 90° Tilt
Cutout	RS Housing: Round shape, Ø3.375 inches (Ø85mm)
Ceiling Thickness	1: 0.03 in to 1 in
Weight	1.87 lbs (fixture only) 0.77 lbs (RM Installation Type only) 1.65 lbs (NC Installation Type only) 5.07 lbs (IC Installation Type only) For total weight, combine weight of fixture and weight of installation type

Electrical and Control

Voltage	120/277: 120/277 Volts
Wattage Range	13.3 to 19.4 Watts
Control	NO: On/Off Control DIM: 0-10V Dimming 1% PH: Phase Dimming 1%

Environmental

Ingress Protection Rating	IP40
Environment	Damp location (interior applications only)
Operating Temperature (Ceiling Cavity Ambient Temperature)	14 °F to 104 °F

Important


Virtual Patent Marking Notice

This website (<https://www.lmpg.com/patents-trademarks>) is provided to satisfy the virtual patent marking provisions of applicable jurisdictions. Some products listed may be covered by additional patents not referenced here.

Lumencycle™ Program


Lumencycle is a comprehensive program designed to maximize the life of Lumenpulse fixtures while preserving their performance, quality, and design intent. Built around three pillars—Repair, Restore, and Recycle—the program provides clear pathways to maintain existing installations, restore fixtures, and responsibly manage them at end of life. For full program details, visit <https://www.lumenpulse.com/lumencycle>.

Deep Washer Guidelines (Spacing and Setback)

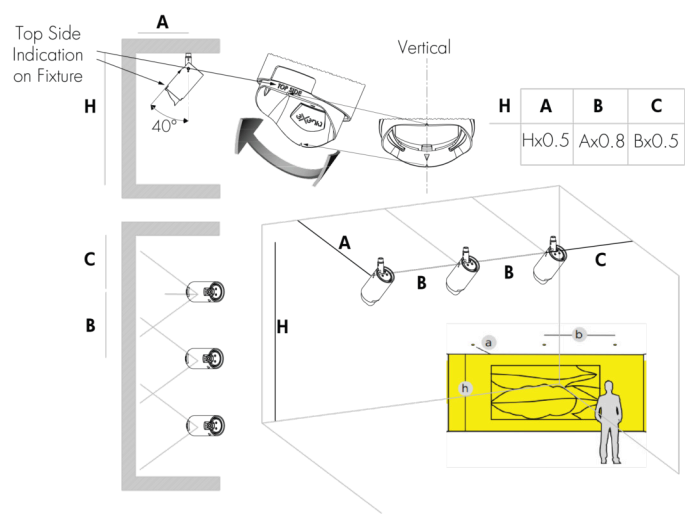


Photometric Information

Deep Washer, L10, 3000K, CRI 92

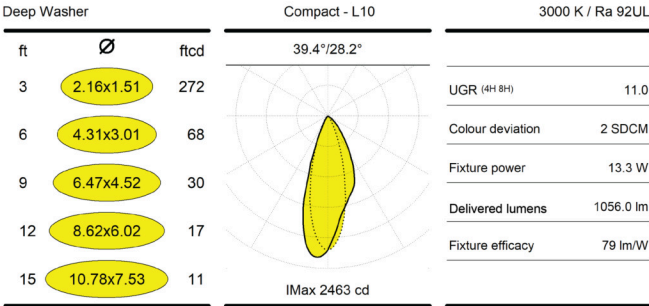


Deep Washer, L13, 3000K, CRI 92

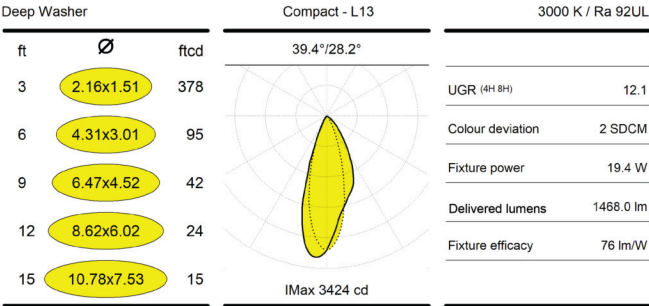


Installation Types - 1x

RM: Remodel Non-Insulated Ceiling
(Non-Plenum Rated)




REVO SPOT SEMI-RECESSED Compact Wallwash (RS)

NC: New Construction Non-Insulated Ceiling
(Non-Plenum Rated)

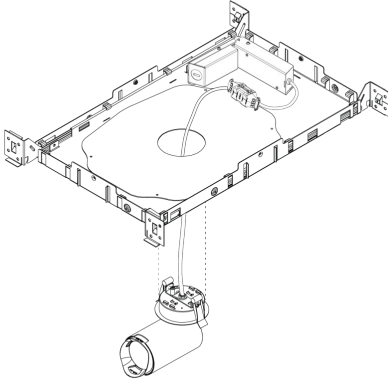

REVO SPOT SEMI-RECESSED Compact Wallwash (RS)

IC: Insulation Contact Mounting

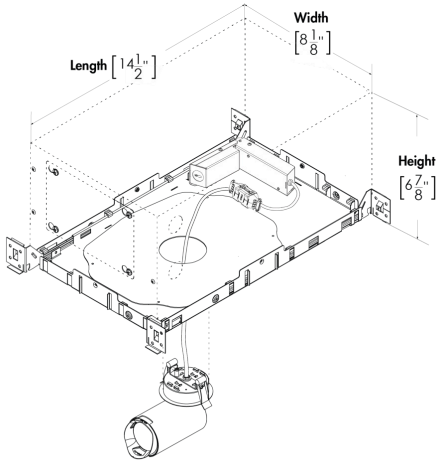

REVO SPOT SEMI-RECESSED Compact Wallwash (RS)

Refer to installation instructions for details.

How to Order

Housing	Size	Voltage	Control	Output (Nominal Lumens)	Finish	Color Rendering	Color and Color Temperature	Optic (Nominal Distribution)	Installation Type	Accessories
RS REVO SPOT SEMI-RECESSED 1x Round	C Compact	120/277 120/277 Volts	NO On/Off Control DIM 0-10V Dimming 1% PH Phase Dimming 1% ⁽¹⁾	L10 1000 lm L13 1300 lm	MWHTX Matte White Txt MBKTX Matte Black Txt CGY Concrete Gray MDB Mud Brown GTX Gold Txt CTX Copper Txt	92 CRI 92 98 CRI 98	27K 2700K 30K 3000K 35K 3500K 40K 4000K	DW Deep Washer	RM Remodel Non-Insulated Ceiling (Non-Plenum Rated) NC New Construction Non-Insulated Ceiling (Non-Plenum Rated) IC Insulation Contact Mounting (Can be Used for Plenum Contact, and Air-Tight Mounting Box Applications)	NA No Accessory

Notes:

1. Phase dimming (PH) is only compatible with 120V power.