


Project Name

Qty

Type


Catalog / Part Number

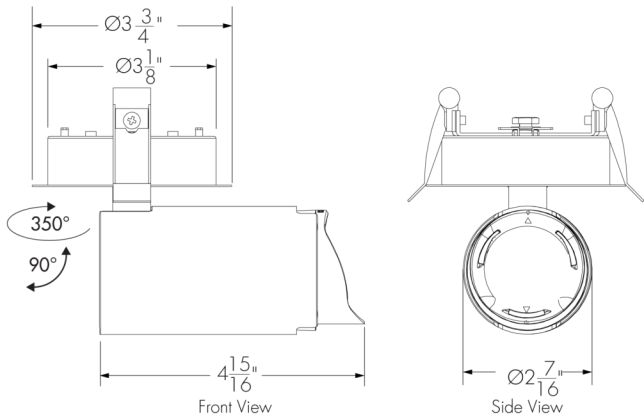

Photometric Summary

Consult the Photometric Information section of the Specification Sheet for 3000K CRI 92 data. For all other configurations, consult IES files on the Lumenpulse website.

Color and Color Temperature



Color Rendering

CRI 92 CRI 98

Control

ON/OFF 0-10V Phase Dimming

Finish



Description

The Exenia REVO SPOT SEMI-RECESSED Medium Wallwash is a unique cross between downlight and track light. It brings extra flexibility to the REVO family, allowing 90 degrees of tilt and 355 degrees of rotation.

Features


|                              |                                                                                                                                                                                                                                    |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Output (Nominal Lumens)      | L07: 700 lm<br>L10: 1000 lm                                                                                                                                                                                                        |
| Color and Color Temperature  | 27K: 2700K<br>30K: 3000K<br>35K: 3500K<br>40K: 4000K                                                                                                                                                                               |
| Output (Nominal Lumens)      | 700 lm, 1000 lm                                                                                                                                                                                                                    |
| Finish                       | MWHTX: Matte White Txt<br>MBKTX: Matte Black Txt<br>CGY: Concrete Gray<br>MDB: Mud Brown<br>GTX: Gold Txt<br>CTX: Copper Txt                                                                                                       |
| Optic (Nominal Distribution) | DW: Deep Washer                                                                                                                                                                                                                    |
| Installation Type            | RM: Remodel Non-Insulated Ceiling (Non-Plenum Rated)<br>NC: New Construction Non-Insulated Ceiling (Non-Plenum Rated)<br>IC: Insulation Contact Mounting (Can be Used for Plenum Contact, and Air-Tight Mounting Box Applications) |
| Warranty                     | 5-year limited warranty                                                                                                                                                                                                            |
| Performance                  |                                                                                                                                                                                                                                    |
| Maximum Delivered Output     | Up to 1,198 lm (L10, CRI 92, 40K, DW)                                                                                                                                                                                              |
| Maximum Delivered Intensity  | 2,245 cd at nadir (L10, CRI 92, 40K, DW)                                                                                                                                                                                           |

Trim Shape



Round

Adjustability



Lumencycle™ Program



Certifications



|                   |                                        |
|-------------------|----------------------------------------|
| Efficacy          | Up to 94 lm/W (L07, CRI 92, 40K, DW)   |
| Color Rendering   | <b>92:</b> CRI 92<br><b>98:</b> CRI 98 |
| Color Consistency | 2 SDCM                                 |
| Lumen Maintenance | L70 120,000 hours<br>L95 19,000 hours  |

Physical

|                   |                                                                                                                                                                                                                               |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Housing Material  | Die cast aluminum                                                                                                                                                                                                             |
| Optics Material   | Polymethyl methacrylate (PMMA)                                                                                                                                                                                                |
| Adjustability     | 350° Rotation, 90° Tilt                                                                                                                                                                                                       |
| Cutout            | RS Housing: Round shape, Ø3.375 inches (Ø85mm)<br>See installation instructions for details                                                                                                                                   |
| Ceiling Thickness | <b>1:</b> 0.03 in to 1 in                                                                                                                                                                                                     |
| Weight            | 1.3 lbs (fixture only)<br>0.77 lbs (RM Installation Type only)<br>1.65 lbs (NC Installation Type only)<br>5.07 lbs (IC Installation Type only)<br>For total weight, combine weight of fixture and weight of installation type |

Electrical and Control

|               |                                                                                          |
|---------------|------------------------------------------------------------------------------------------|
| Voltage       | <b>120/277:</b> 120/277 Volts                                                            |
| Wattage Range | 9.3 to 13.3 Watts                                                                        |
| Control       | <b>NO:</b> On/Off Control<br><b>DIM:</b> 0-10V Dimming 1%<br><b>PH:</b> Phase Dimming 1% |

Environmental

|                                                            |                                            |
|------------------------------------------------------------|--------------------------------------------|
| Ingress Protection Rating                                  | IP40                                       |
| Environment                                                | Damp location (interior applications only) |
| Operating Temperature (Ceiling Cavity Ambient Temperature) | 14 °F to 104 °F                            |

Important


Virtual Patent Marking Notice

This website (<https://www.lmpg.com/patents-trademarks>) is provided to satisfy the virtual patent marking provisions of applicable jurisdictions. Some products listed may be covered by additional patents not referenced here.

Lumencycle™ Program


Lumencycle is a comprehensive program designed to maximize the life of Lumenpulse fixtures while preserving their performance, quality, and design intent. Built around three pillars—Repair, Restore, and Recycle—the program provides clear pathways to maintain existing installations, restore fixtures, and responsibly manage them at end of life. For full program details, visit <https://www.lumenpulse.com/lumencycle>.

Deep Washer Guidelines (Spacing and Setback)

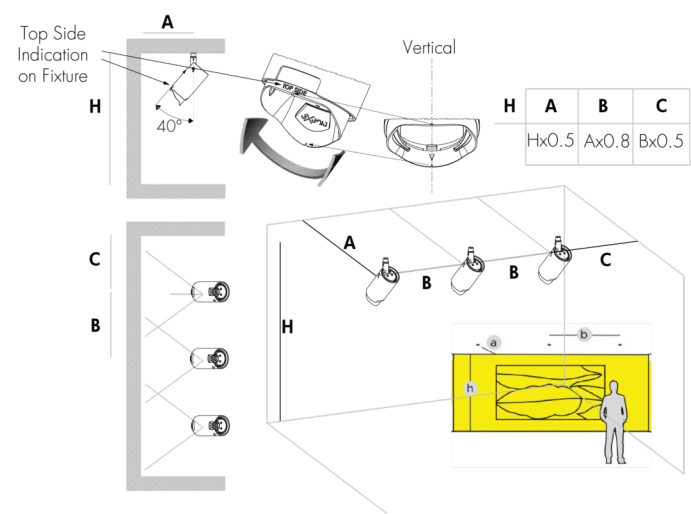


Photometric Information

Deep Washer, L07, 3000K, CRI 92

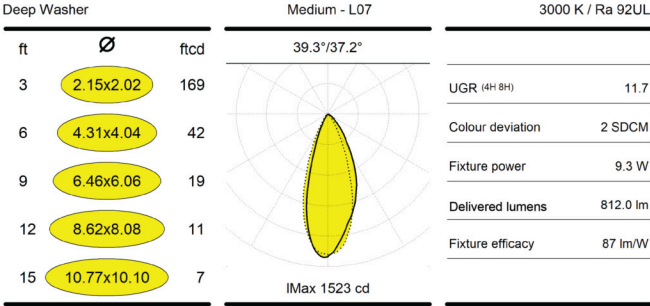


Deep Washer, L10, 3000K, CRI 92

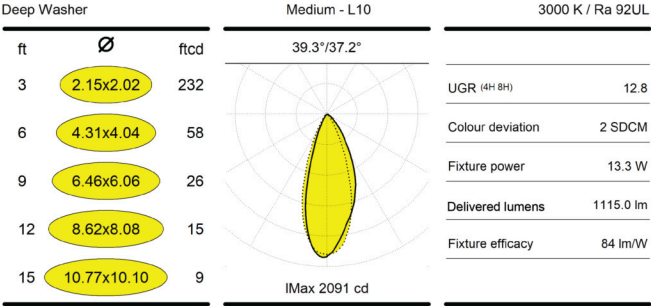

Installation Types - 1x


RM: Remodel Non-Insulated Ceiling  
(Non-Plenum Rated)



REVO SPOT SEMI-RECESSED Medium Wallwash (RS)


Refer to installation instructions for details.

NC: New Construction Non-Insulated Ceiling  
(Non-Plenum Rated)

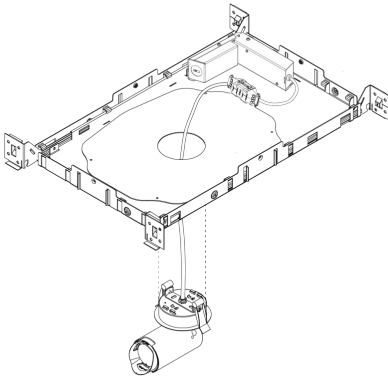

REVO SPOT SEMI-RECESSED Medium Wallwash (RS)

IC: Insulation Contact Mounting

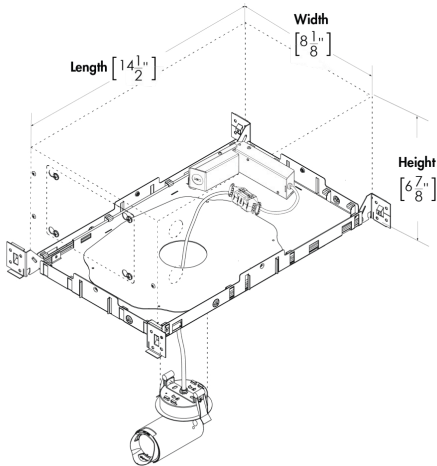

REVO SPOT SEMI-RECESSED Medium Wallwash (RS)

How to Order

| Housing                                             | Size                | Voltage                         | Control                                                                                                                     | Output (Nominal Lumens)                           | Finish                                                                                                                                                                                                 | Color Rendering                                | Color and Color Temperature                                                                          | Optic (Nominal Distribution) | Installation Type                                                                                                                                                                                                                                                     | Accessories               |
|-----------------------------------------------------|---------------------|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------------------------------------------------------------------------|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| <b>RS</b><br>REVO SPOT<br>SEMI-RECESSED<br>1x Round | <b>MD</b><br>Medium | <b>120/277</b><br>120/277 Volts | <b>NO</b><br>On/Off Control<br><br><b>DIM</b><br>0-10V Dimming<br>1%<br><br><b>PH</b><br>Phase<br>Dimming 1% <sup>(1)</sup> | <b>L07</b><br>700 lm<br><br><b>L10</b><br>1000 lm | <b>MWHTX</b><br>Matte White Txt<br><br><b>MBKTX</b><br>Matte Black Txt<br><br><b>CGY</b><br>Concrete Gray<br><br><b>MDB</b><br>Mud Brown<br><br><b>GTX</b><br>Gold Txt<br><br><b>CTX</b><br>Copper Txt | <b>92</b><br>CRI 92<br><br><b>98</b><br>CRI 98 | <b>27K</b><br>2700K<br><br><b>30K</b><br>3000K<br><br><b>35K</b><br>3500K<br><br><b>40K</b><br>4000K | <b>DW</b><br>Deep Washer     | <b>RM</b><br>Remodel Non-Insulated Ceiling (Non-Plenum Rated)<br><br><b>NC</b><br>New Construction Non-Insulated Ceiling (Non-Plenum Rated)<br><br><b>IC</b><br>Insulation Contact Mounting (Can be Used for Plenum Contact, and Air-Tight Mounting Box Applications) | <b>NA</b><br>No Accessory |

Notes:

1. Phase dimming (PH) is only compatible with 120V power.