


Project Name


Qty

Type

Catalog / Part Number

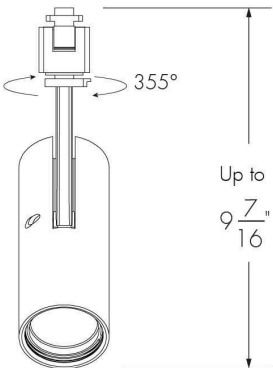

One circuit model shown

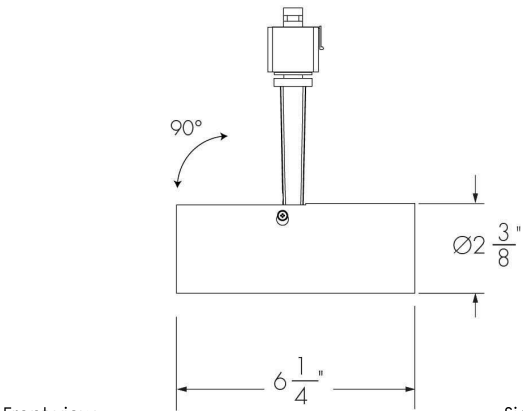

Front view

Side view

Photometric Summary


Based on Narrow Optic (nominal 25°), 4000K, CRI 90+

Nominal output [lm]	Delivered output [lm] [1]	Power (120V) [W]	Efficacy [lm/W]
700	590	7	84
1000	1,192 *	11	108
1300	1,375	13	106


[1] Consult website for latest IES files.

* Photometric performance is measured in compliance with IESNA LM-79-08.

Optics

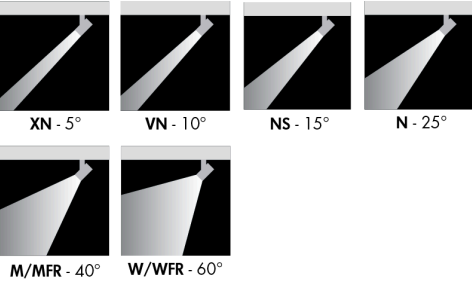

Color and color temperature



Control



Description

The Lumencore Track M2 Spot is a LED spotlight available in both 1-circuit and 2-circuit configurations. The Lumencore Track M2 Spot offers a wide range of outputs, field-changeable accessories, multiple finishes, and optics, including Extra Narrow Spot (XN 5°) and Very Narrow Spot (VN 10°).

Features

Output (Nominal Lumens)	700 lm, 1000 lm, 1300 lm, 2000 lm
Color and Color Temperature	2200K 2700K 3000K 3500K 4000K
Optics (Nominal Distribution)	Extra Narrow Spot 5°, Very Narrow Spot 10°, Narrow Spot 15°, Narrow 25°, Medium/Medium Faceted Reflector 40°, Wide/Wide Faceted Reflector 60°
On/off switch	Integral on/off switch to simplify maintenance (two circuit track only)
Warranty	5-year limited warranty
Performance	
Maximum Delivered Output	Up to 2,067 lm (wide faceted reflector optic 60°, 4000K, CRI 80)
Maximum Delivered Intensity	Up to 29,582 cd (extra narrow spot optic 5°, 4000K, CRI 80)
Efficacy	Up to 118 lm/W (wide faceted reflector optic 60°, 4000K, CRI 80)
Color Consistency	2 SDCM, 3 SDCM (XN optic only)
Color Rendering	CRI 80+ CRI 90+ CRI 95+

Finishes



MWH-Matte white



MBK-Matte black



MBR-Matte brown



MOR-Matte orange



MGR-Matte green



MBL-Matte blue



MSI-Matte silver



GWH-Glossy white



GBK-Glossy black



GYL-Glossy yellow



GLR-Glossy red



GVI-Glossy violet



GGR-Glossy green



GIY-Glossy ivory



CGY-Concrete grey



MLG-Metalized grey



IBR-Italian brick red




PWH-Parget white



CC-Custom color and finish
(Please specify RAL color)

Ajustability



Certifications



Lumen Maintenance	L95 55,000 hrs
	L70 225,000 hrs

Physical

Housing Material	Aluminum
Weight	1.3 lbs
TIR Optics Material	Clear polycarbonate
Reflector Material	Aluminum
Track Adapter Type	One circuit track adapter standard, Two circuit track adapter standard
Track Adapter Color	White Adapter, Black Adapter
Adjustability	Lockable tilt and rotation, +/- 90° Tilt — 355° Rotation

Electrical and Control

Voltage	120 Volts
Control	On/Off Control, Phase Dimming

Environmental

Environment	Dry location (indoor applications only)
Operating Temperature	-4 °F to 104 °F
Ingress Protection Rating	IP20

Important


Virtual Patent Marking Notice

This website (<https://www.lmpg.com/patents-trademarks>) is provided to satisfy the virtual patent marking provisions of applicable jurisdictions. Some products listed may be covered by additional patents not referenced here.

Mounting Options


One Circuit Track Adapter

Two Circuit Track Adapter Standard

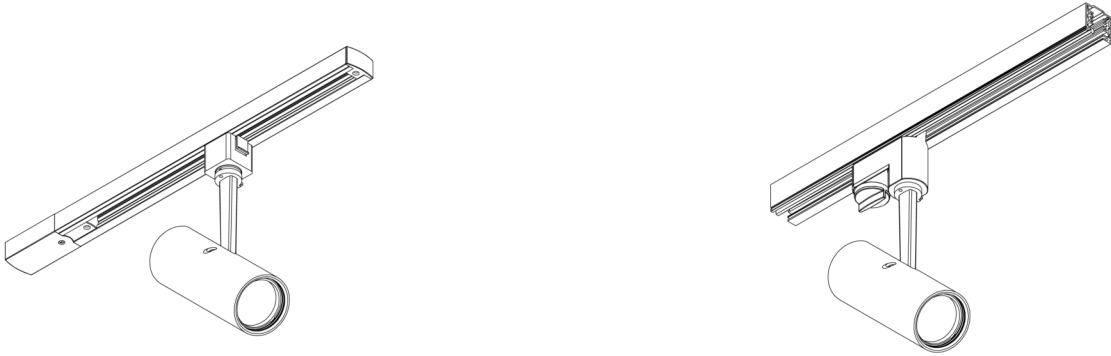


Fixture Dimensions

One Circuit Track

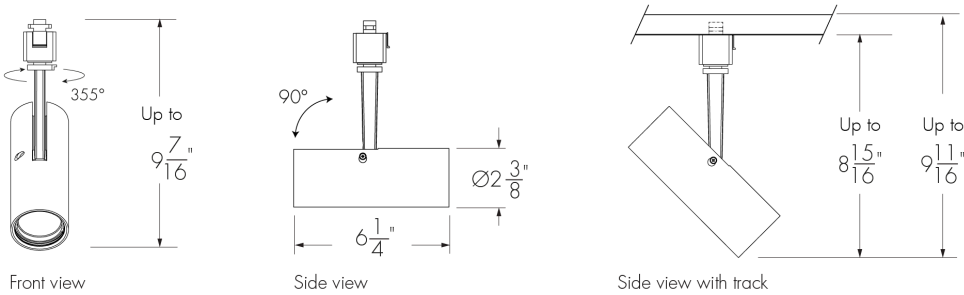

Two Circuit Track

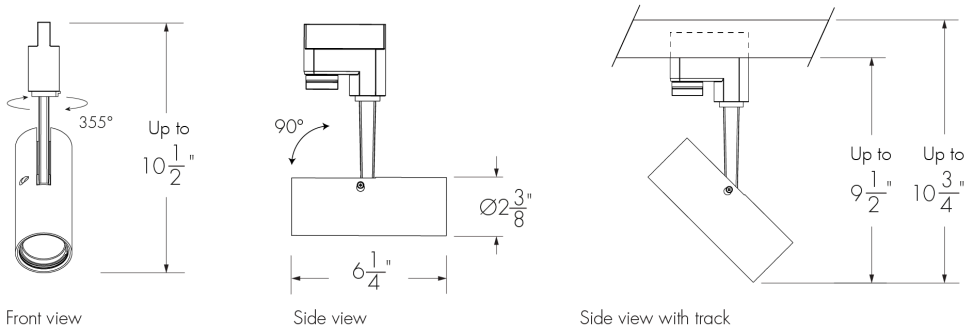


Photometric Information - Color Rendering Options Comparison, 3000K


Color sample	Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
CRI 80+	84	82	90	97	83	82	88	86	63	15	77	83	68	84	98	75
CRI 90+	94	95	98	99	95	94	97	91	80	55	93	97	83	96	99	89
CRI 95+	97	96	97	99	96	96	95	96	97	97	96	95	86	96	98	97
Radiant CRI 80+	84	83	91	96	81	82	89	83	62	15	79	80	69	85	98	76
Radiant CRI 95+	95	95	94	95	98	94	90	94	96	96	89	95	80	94	98	96

Optics


TIR Optic
XN/VN/NS/N



Semi-Specular reflector
M/W



Faceted reflector
MFR/VFR




Control

Refer to website product configurator for exceptions


- On/off control
- NO - On/off control
- Phase dimming
- PH - Phase dimming

Photometric Information


XN - Extra Narrow Spot (Nominal 5°), 4000K

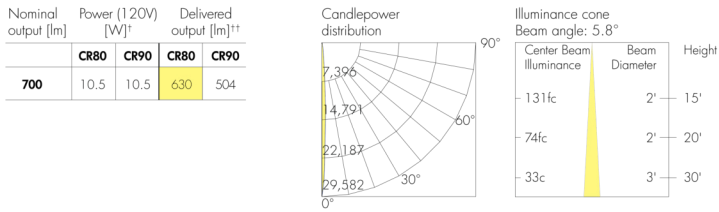


VN - Very Narrow Spot (Nominal 10°), 4000K

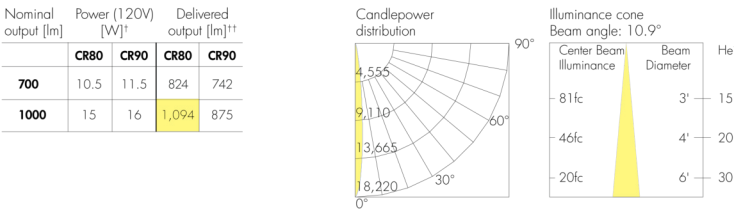


NS - Narrow Spot (Nominal 15°), 4000K

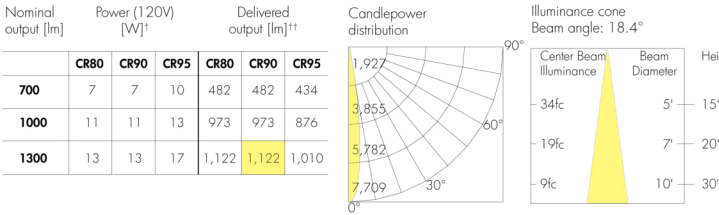


N - Narrow (Nominal 25°), 4000K

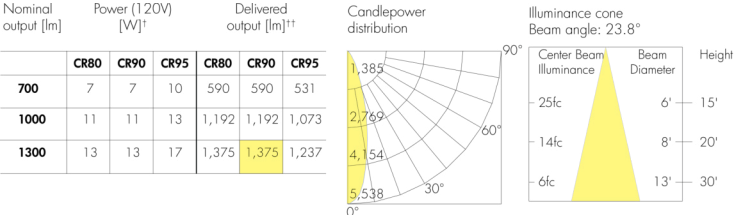


M - Medium (Nominal 40°), 4000K

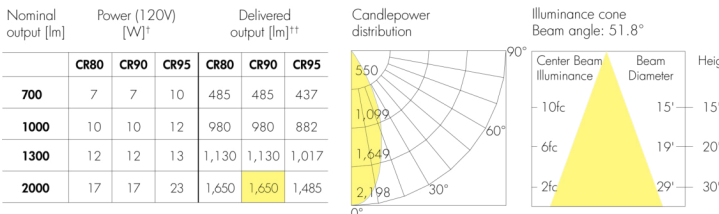


MFR - Medium Faceted Reflector (Nominal 40°), 4000K

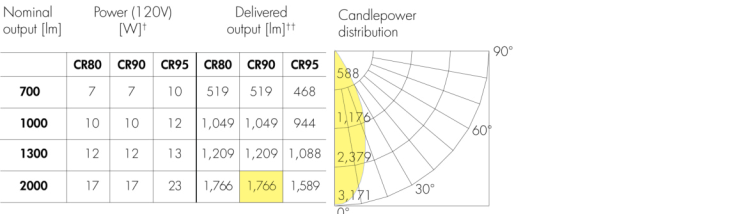

W - Wide (Nominal 60°), 4000K

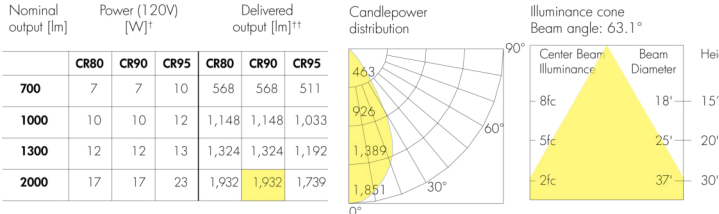

WFR - Wide Faceted Reflector (Nominal 60°), 4000K

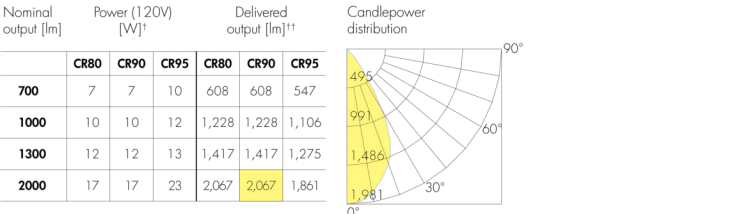

†Add 3 watts per fixture when specifying Lumentalk™.


†Delivered wattage: +/- 10% tolerance.

††Consult website for latest IES files. Delivered output: +/- 10% tolerance.

Photometric performance is measured in compliance with IESNA LM-79-24.


Typical Wiring Diagrams

On/Off Control (NO)

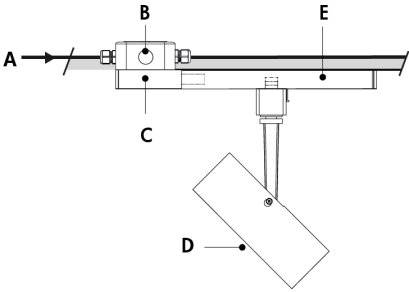

- A - Power input to track (120V)
- B - Junction box (by others)
- C - Live End Feed Track accessory (left)
- D - Lumencore Track M2 Spot
- E - Lumencore Track Single Circuit System


Phase Dimming (PH)

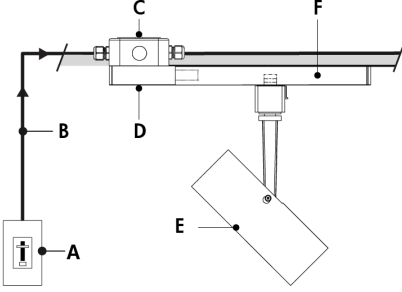

- A - Third party Phase dimmer
- B - Phase dimmed power circuit (120V)
- C - Junction box (by others)
- D - Live End Feed Track accessory (left)
- E - Lumencore Track M2 Spot
- F - Lumencore Track Single Circuit System


Typical Wiring Details

One Circuit Wiring Detail - Live End Feed (Left)




- A - Ground
- B - Line 1
- C - Neutral 1
- D - Polarity line

Lumencore Track Single Circuit System and Live End Feed (Left)

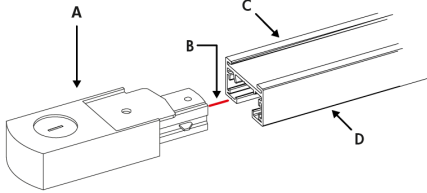


- A - Top view live feed (Reflected ceiling plan view)
- B - Polarity line
- C - Back view
- D - Front view

One Circuit Wiring Detail - Track

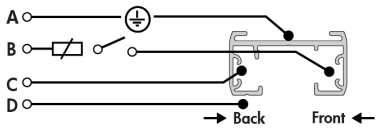


- A - Ground
- B - Line 1
- C - Neutral 1
- D - Polarity line

Double Circuit Wiring Detail - Live End Feed (Left)

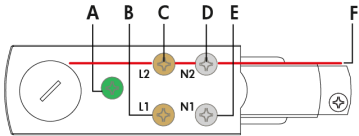


- A - Ground
- B - Line 1
- C - Line 2
- D - Neutral 2
- E - Neutral 1
- F - Polarity line

Lumencore Track Double Circuit System and Live End Feed (Left)

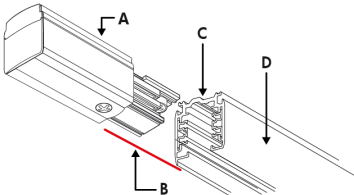

- A - Top view live feed (Reflected ceiling plan view)
- B - Polarity line
- C - Back view
- D - Front view

Double Circuit Wiring Detail - Track

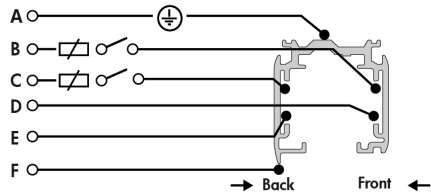

- A - Ground
- B - Line 2
- C - Line 1
- D - Neutral 2
- E - Neutral 1
- F - Polarity line

* Line 1 and 2 are reversed for a live end right polarity. Max 2400W per circuit , 4800W total , Max 120V - 60HZ per circuit Max 20AMP per circuit.

Optical Accessories

SL - Softening Glass Lens




LATSM2-SL

CL - Clear Glass Lens




LATSM2-CL

LSN - Linear Spread Lens Narrow (1° x 40°)




Horizontal Beam Distribution



Vertical Beam Distribution

LATSM2-LSN

HL - Honeycomb Louver




LATSM2-HL

PD - Prismatic Diffuser




LATSM-PD

LSW - Linear Spread Lens Wide (1° x 60°)




Horizontal Beam Distribution



Vertical Beam Distribution

LATSM2-LSW

XLVR - Concentric Ring Louver



LATSM2-XLVR

Maximum one accessory installed at a time.

How to Order

Housing ⁽¹⁾	Certification	Voltage	Output (Nominal Lumens)	Color and Color Temperature	Color Rendering	Optics (Nominal Distribution)	Finish	Bezel	Interior Bezel Finish
LATSM2 Lumencore Track M2 Spot	A UL/cUL	120 120 Volts	L07 700 lm	22K 2200K ⁽³⁾ ⁽⁴⁾	CR80 CRI 80+	XN Extra Narrow Spot 5° ⁽⁷⁾	MWH Matte White	b Bezel	MWH Matte White
			L10 1000 lm	27K 2700K	CR90 CRI 90+	VN Very Narrow Spot 10° ⁽⁸⁾	MBK Matte Black		MBK Matte Black
			L13 1300 lm	30K 3000K	CR95 CRI 95+ ⁽⁵⁾	NS Narrow Spot 15° ⁽⁹⁾	MBR Matte Brown		MBR Matte Brown
			L20 2000 lm ⁽²⁾	35K 3500K	RCR80 Radiant CRI 80+ ⁽⁴⁾ ⁽⁶⁾	N Narrow 25° ⁽⁹⁾	MOR Matte Orange		MOR Matte Orange
				40K 4000K	RCR95 Radiant CRI 95+ ⁽⁴⁾ ⁽⁵⁾ ⁽⁶⁾	M Medium 40°	MGR Matte Green		MGR Matte Green
						MFR Medium Faceted Reflector 40°	MBL Matte Blue		MBL Matte Blue
						W Wide 60°	MSI Matte Silver		MSI Matte Silver
						WFR Wide Faceted Reflector 60°	GWH Glossy White		GWH Glossy White
							GBK Glossy Black		GBK Glossy Black
							GYL Glossy Yellow		GYL Glossy Yellow
							GLR Glossy Red		GLR Glossy Red
							GVI Glossy Violet		GVI Glossy Violet
							GGR Glossy Green		GGR Glossy Green
							GIY Glossy Ivory		GIY Glossy Ivory
							CGY Concrete Grey		CGY Concrete Grey
							MLG Metalized Grey		MLG Metalized Grey
							IBR Italian Brick Red		IBR Italian Brick Red
							PWH Parget White		PWH Parget White
							CC Custom Color & Finish ⁽¹⁰⁾		CC Custom Color & Finish ⁽¹⁰⁾

Notes:

1. Refer to website product configurator for all exceptions.

2. Available for M, MFR, W and WFR optics only.

3. Available for CR80 only.

4. Not available for XN and VN optics.

5. CR95 and RCR95 available up to 1300 lumens for NS and N optics, and up to 2000 lumens for M, MFR, W and WFR optics.

6. Radiant CRI options available for 3000K only.

7. Available for 700 lumens when combined with CR80 or CR90 color rendering options only.

8. Available for 700 and 1000 lumens when combined with CR80 or CR90 color rendering options only.

9. Available up to 1300 lumens.

10. Longer lead times can be expected for custom RAL color finishes.

How to Order

Track Adapter Type	Track Adapter Color	Control	Accessories ⁽¹³⁾ ⁽¹⁴⁾
1C One circuit track adapter standard ⁽¹¹⁾ 2C Two circuit track adapter standard	AWH White Adapter ABK Black Adapter	NO On/Off Control PH Phase Dimming ⁽¹²⁾	NA No Accessory SL Softening Glass Lens HL Honeycomb Louver XLVR Concentric Ring Louver ⁽¹⁵⁾ CL Clear Glass Lens PD Prismatic Diffuser LSN Linear Spread Lens Narrow (1° x 40°) ⁽¹⁶⁾ LSW Linear Spread Lens Wide (1° x 60°) ⁽¹⁶⁾

Notes:

- 11.** Monopoint accessory available. Refer to Single Circuit Track specification sheet for details.

12. Phase dimming available for 700 lumens when combined with XN or VN optics and 1000 lumens when combined with VN optic. Phase dimming available for 1000, 1300 and 2000 lumens when combined with NS, N, M, MFR, W or WFR optics only.

13. Maximum one accessory per fixture.
- 14.** Accessories specified in the fixture code are factory installed but can also be changed in the field. Refer to installation instructions for details. To order accessories separately, refer to the Optical Accessories section of the specification sheet.

15. Available for XN, VN and NS optics only.

16. Available for XN, VN, NS, N and MFR optics only.