


Project Name

Qty

Type


Catalog / Part Number

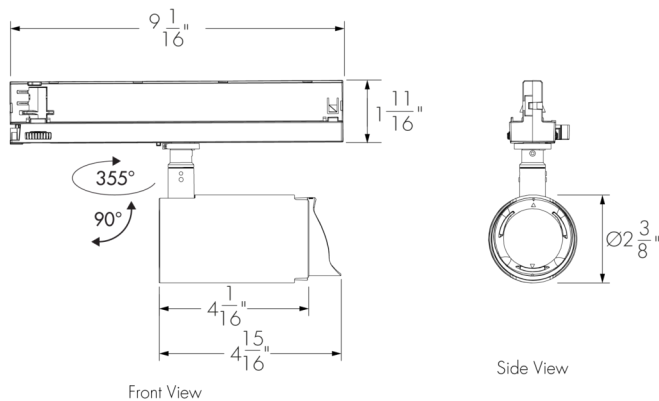


Photometric Summary

Consult the Photometric Information section of the Specification Sheet for 3000K CRI 92 data. For all other configurations, consult IES files on the Lumenpulse website.

Color and Color Temperature




Color Rendering



Control



Track Adapter Finish




Description

The Exenia REVO SPOT LV Medium Wallwash track-mounted line voltage fixture utilizes a driver integrated into the adapter to provide a clean, simplistic look, while its deep washer gives uniform coverage from the top of the wall to the floor. REVO SPOT LV luminaires boast a marked performance-to-size ratio and a wide range of finishes.


Features

Output (Nominal Lumens)	L04: 400 lm L05: 500 lm
Color and Color Temperature	27K: 2700K 30K: 3000K 35K: 3500K 40K: 4000K
Finish	MWHTX: Matte White Txt MBKTX: Matte Black Txt CGY: Concrete Grey MDB: Mud Brown GTX: Gold Txt CTX: Copper Txt
Output (Nominal Lumens)	400 lm, 500 lm
Track Adapter Finish	AWH: Matte White ABK: Matte Black
Optic (Nominal Distribution)	DW: Deep Washer
Warranty	5-year limited warranty
Performance	
Maximum Delivered Output	Up to 638 lm (L05, CRI 92, 40K, DW)
Maximum Delivered Intensity	1,196 cd at nadir (L05, CRI 92, 40K, DW)
Efficacy	Up to 99 lm/W (L04, CRI 92, 40K, DW)


Finish




Matte White
Txt




Matte Black
Txt




Concrete Grey



Mud Brown




Gold Txt



Copper
Txt

Adjustability



355° Rotation
90° Tilt

Certifications




Color Rendering	92: CRI 92
	98: CRI 98
Color Consistency	2 SDCM
Lumen Maintenance	L70 120,000 hours
	L95 19,000 hours

Physical	
Housing Material	Die cast aluminum
Optics Material	Polymethyl methacrylate (PMMA)
Weight	1.65 lbs (fixture only)
Adjustability	355° Rotation, 90° Tilt

Electrical and Control	
Voltage	120: 120 Volts
Wattage Range	4.7 to 6.7 Watts
	Refer to the Wattage Information section for more information.
Control	NO: On/Off Control
	DIM: 0-10V Dimming 1%
	DALI: DALI Dimming 1%
	PH: Phase Dimming 1%
Track Mounting	3-Circuit track required, refer to A.A.G Stucchi ONETRACK™ product page and specification sheet for compatible track system and accessories


Environmental	
Ingress Protection Rating	IP40
Environment	Damp location (interior applications only)
Operating Temperature	-4 °F to 86 °F

Deep Washer Guidelines (Spacing and Setback)

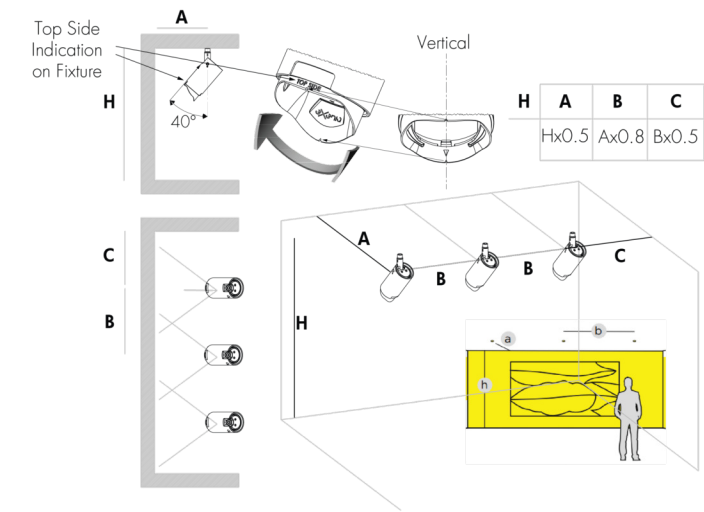

Photometric Information

Deep Washer L05, 3000K, CRI 92

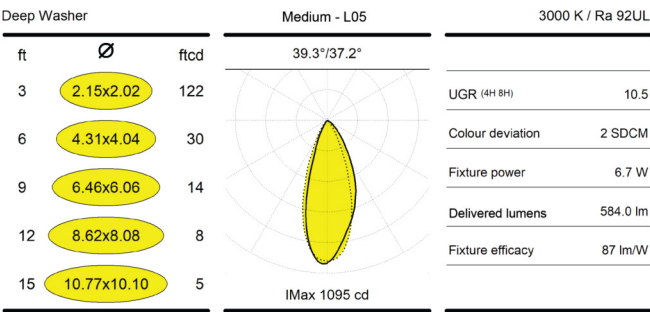

Wattage Information

L04 - Output

DW	Deep Washer	4.7W
----	-------------	------

L05 - Output

DW	Deep Washer	6.7W
----	-------------	------

How to Order

Housing	Size	Voltage	Track Adapter Type	Control	Output (Nominal Lumens)	Finish	Track Adapter Finish	Color Rendering	Color and Color Temperature	Optic (Nominal Distribution)	Accessories
TRS REVO SPOT LV 1x	MD Medium	120 120 Volts	3C Three Circuit Track Adapter ⁽¹⁾	NO On/Off Control DIM 0-10V Dimming 1% DALI DALI Dimming 1% PH Phase Dimming 1% ⁽²⁾ ⁽³⁾	L04 400 lm L05 500 lm	MWHTX Matte White Txt M8KTX Matte Black Txt CGY Concrete Grey MDb Mud Brown GTX Gold Txt CTX Copper Txt	AWH Matte White ABK Matte Black	92 CRI 92 98 CRI 98	27K 2700K 30K 3000K 35K 3500K 40K 4000K	DW Deep Washer	NA No Accessory

Notes:

1. Track and track accessories are sold separately. Refer to A.A.G Stucchi ONETRACK™ product page and specification sheet for compatible track system.

2. Phase dimming (PH) is only compatible with 120V power.

3. Not available for L04 lumen output.