

Project Name _____

Qty _____


Type _____

Catalog / Part Number _____




ST Configuration Shown


ST - CONFIGURATION



R - CONFIGURATION



Mounting Options

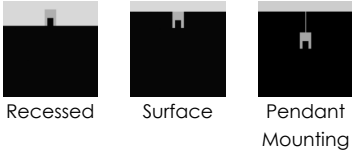

Finish



Lumencycle™ Program



Certifications



Description

A.A.G. Stucchi's ONETRACK™ track system for suspended, ceiling, or wall installation proactively responds to current market's needs. The ONETRACK has six conductors for use with both non-dimmable and Phase, 0-10v or DALI dimmable projector luminaires. Available in 4 ft, 8 ft, and 12 ft length as standard. Finishes include white, black, and anodized grey. A wide range of connectors, mounting options, and accessories make this system suitable for a wide range of applications. A.A.G. Stucchi's ONETRACK™ is only for use with Exenia luminaires.

Physical

Housing Material	Extruded aluminum
Weight	ST Configurations: 4 ft: 2.74 lbs 8 ft: 4.74 lbs 12 ft: 8.2 lbs R Configurations: 4 ft: 4.71 lbs 8 ft: 5.89 lbs
Maximum Load	180 lbs/ft [25 kg/m]
Configuration and Mounting	ST: Surface, R: Recessed

Features

Length	UL4: 4 ft UL8: 8 ft UL12: 12 ft
Finish ¹	/W: White /B: Black
Warranty	5-year limited warranty

Electrical and Control

Voltage	120: 120 Volts
Connectors	Polarized
Circuits	3 Circuit/1 Neutral (20A)
Wire Gauge	12 AWG maximum (accessories only)

Accessories (Order Separately)

Track Accessories	Various accessories available, must be ordered separately. Consult A.A.G. Stucchi Track ONETRACK™ Accessories Guide in the following pages for details.
-------------------	---

Notes

1. Consult factory for Anodized Gray finish.


Important

Lumencycle™ Program
Lumencycle is a comprehensive program designed to maximize the life of Lumenpulse fixtures while preserving their performance, quality, and design intent. Built around three pillars—Repair, Restore, and Recycle—the program provides clear pathways to maintain existing installations, restore fixtures, and responsibly manage them at end of life. For full program details, visit <https://www.lumenpulse.com/lumencycle>.

Track Accessories Guide


Typical Layouts

Surface (ST) and Recessed Track (R)

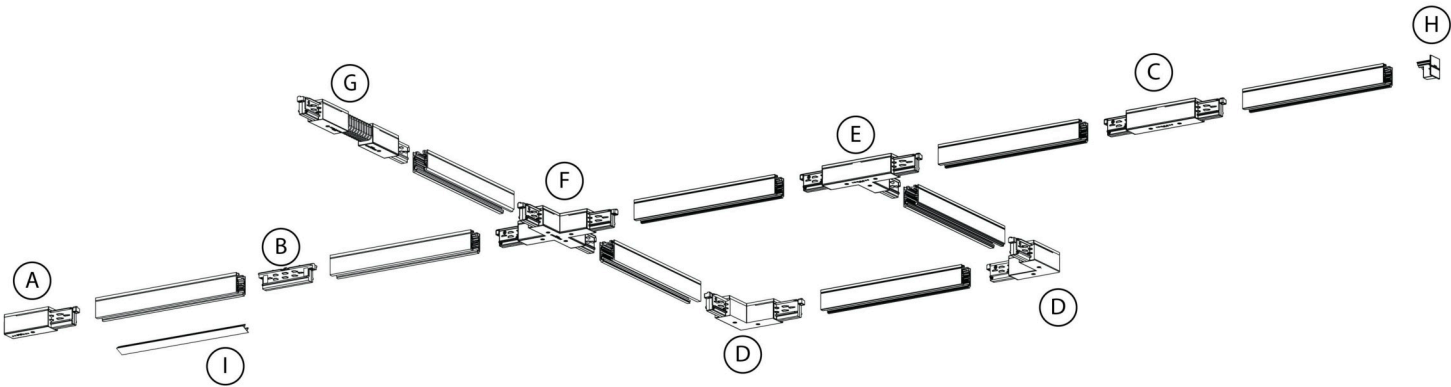

ST model shown for reference only. Various track accessories available, must be ordered separately. Consult A.A.G. Stucchi Track ONETRACK™ Accessories Guide in the following pages for details.

Cutting tool




S-9000/T
Cutting tool for Track conductors when Track needs to be field cut


Feed and Endcaps (for Type ST and Type R)

A_ Live End Feeds


2 x 7/8in Knockout available.

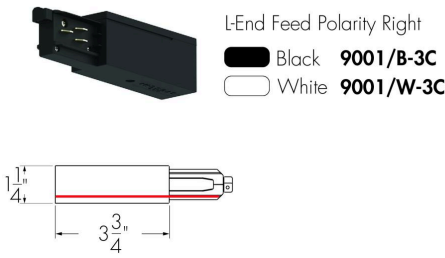

2 x 7/8in Knockout available.

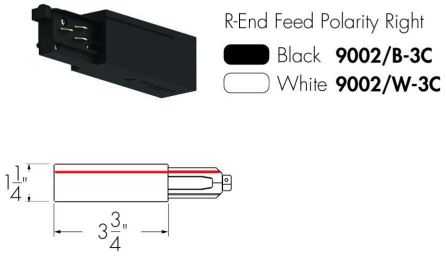


B_ Joining Connector

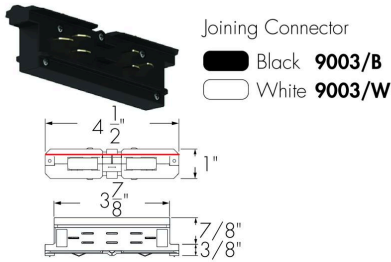

Longer brackets are required for suspension above these parts.


C_ Middle Feed

1 x 7/8in Knockout available.

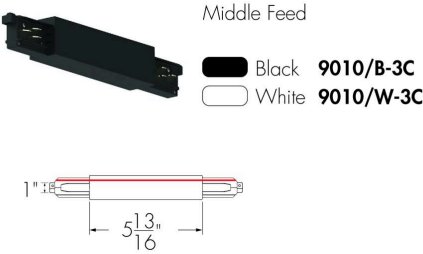


D_ L-Feeds

1 x 7/8in Knockout available.

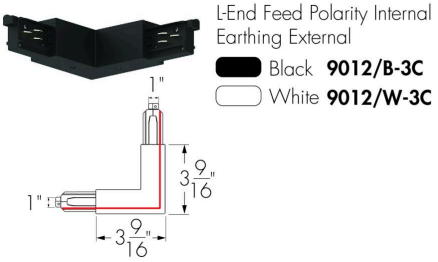


1 x 7/8in Knockout available.

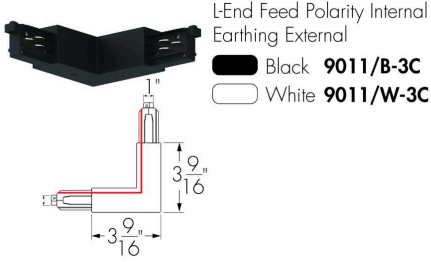


E_ T-Feeds


1 x 7/8in Knockout available.

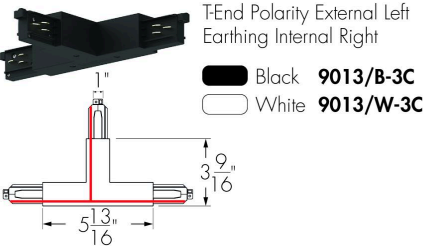

1 x 7/8in Knockout available.

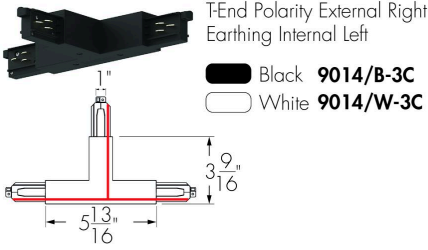


1 x 7/8in Knockout available.

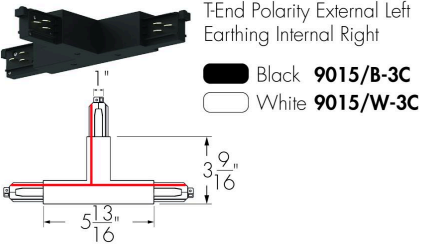


F_ X-Feeds


1 x 7/8in Knockout available.

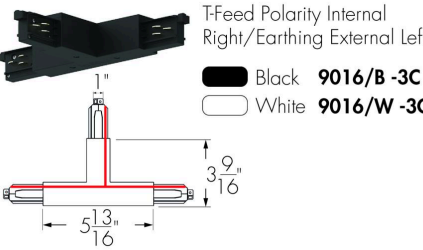


1 x 7/8in Knockout available.

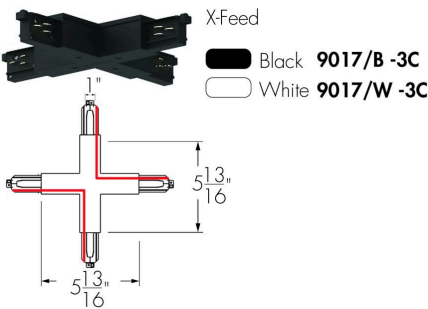


G_ Adjustable Corner

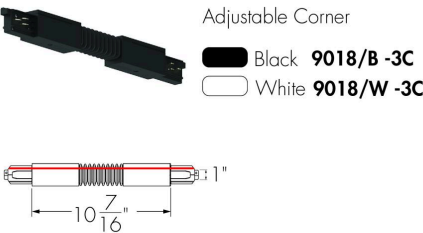

H_ End Cap (Type ST)

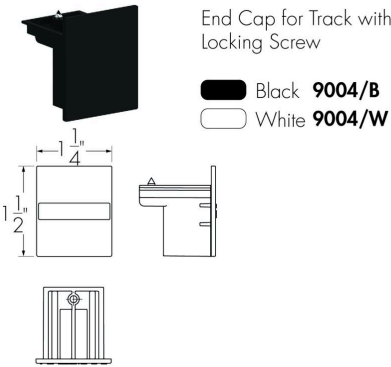


H_ End Cap (Type R)

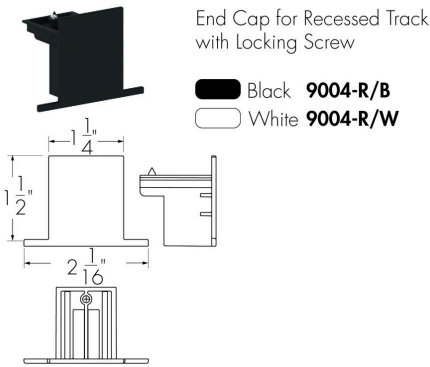


Plastic Feed Covers for Recessed Track (for Type R)


A-2 _ Live End Feed Cover

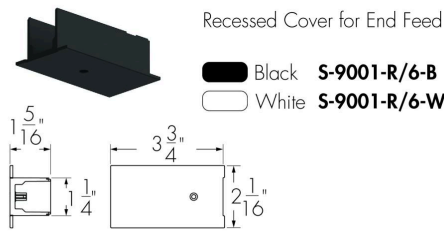


C-2_ Middle Feed Cover

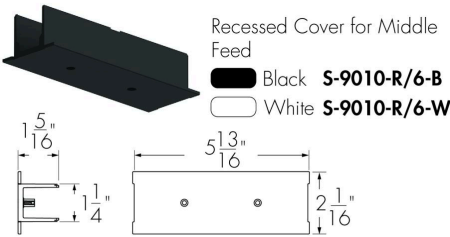


D-2_ L Feed Cover

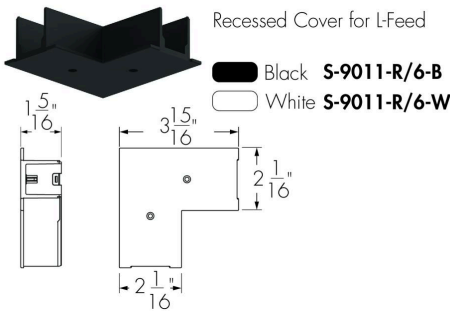

E-2_ T Feed Cover

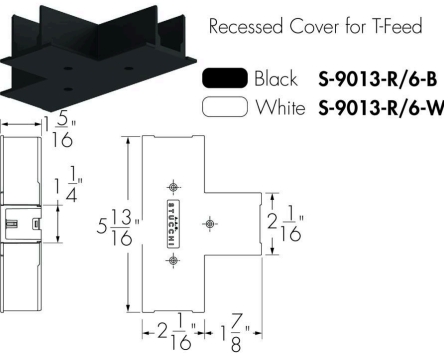

F-2_ X Feed Cover

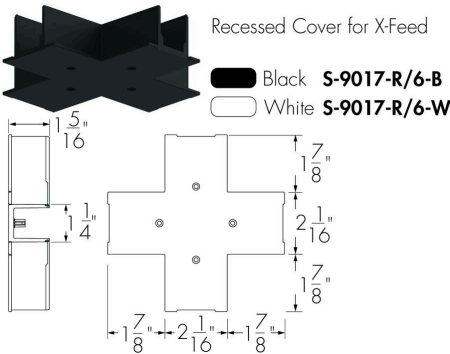


I_ Plastic Track Covers (For Type ST & Type R)




A-3 Feed for Installation of Current Limiters (for Type ST and Type R)



L-End Feed with Circuit Breaker
for 3c*
Black 9001-CL/B-3C
White 9001-CL/W-3C



R-End Feed with Circuit Breaker
for 3c*
Black 9002-CL/B-3C
White 9002-CL/W-3C



* In this enclosure the client must specify and install 3 individual single pole circuit protectors (resistor / current limiter) as required for the project. Frequency and Delay setting: 2 (Slow DC 50/60Hz) [by others]. Circuit protectors are to be sourced and supplied by others. Should procurement assistance be required, please consult Lumenpulse factory for availability.

Reinforcing Brackets (R.B.)

Required when a rigid 3/8" stem is used for both mechanical suspension and electrical feed. In this case no additional mounting point (aircraft cable) is installed.

A-4_ R.B. for Live End Feeds




Reinforcing Bracket for End
Feed
Black S-9001/SU-B
White S-9001/SU-W



C-4_ R.B. for Middle-Feed




Reinforcing Bracket for Middle
Feed
Black S-9010/SU-B
White S-9010/SU-W



D-4_ R.B. for L Feed




Reinforcing Bracket for L-Feed
Black S-9011/SU-B
White S-9011/SU-W



E-4_ R.B. for Live End Feeds




Reinforcing Bracket for X-Feed
Black S-9017/SU-B
White S-9017/SU-W

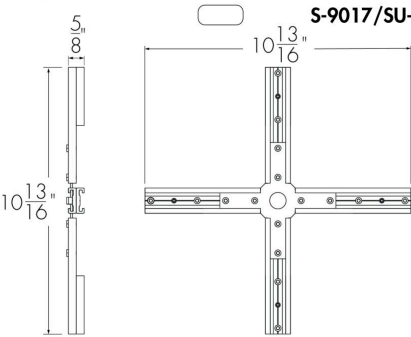

F-4_ R.B. for Live End Feeds



Reinforcing Bracket for T-Feed
Black S-9013/SU-B
White S-9013/SU-W



*Note that only a limited amount of accessories are available in Gray for use with anodized track and are RAL 7035, consult factory.

Suspension Accessories for Power Suspension Points (Type ST)

All Suspension Accessories can be purchased as kits or as individual components.

Suspension Kit P3 (Power Side)

- Black
S-9000-P3-P-B-UL-36
S-9000-P3-P-B-UL-120
S-9000-P3-P-B-UL-200
- White
S-9000-P3-P-W-UL-36
S-9000-P3-P-W-UL-120
S-9000-P3-P-W-UL-200



Dimensions available upon request.

Suspension Accessories for Non-Power Suspension Points (Type ST)

All Suspension Accessories can be purchased as kits or as individual components.

Suspension Kit P3 (Non-Power Side)

- Black
S-9000-P3-S-B-UL-36
S-9000-P3-S-B-UL-120
S-9000-P3-S-B-UL-200
- White
S-9000-P3-S-W-UL-36
S-9000-P3-S-W-UL-120
S-9000-P3-S-W-UL-200




Dimensions available upon request.

Suspension Accessories for Non-Power Suspension Points (Type ST)

All Suspension Accessories can be purchased as kits or as individual components.

Suspension Kit 4

9000-KIT4-1.5
9000-KIT4-3
9000-KIT4-5



Dimensions available upon request.

Individual Components

J - Ceiling Attachment



Round Head Ceiling Attachment
S-9000/216

K - Suspension Cable



Steel Cable with Spherical End
Ø 0.05 in
S-9000/211-S-1,5 59in
S-9000/211-S-3 118in
S-9000/211-S-5 197in

L - Clamp and Gripper




Clamp with Automatic Gripper
S-9000/116

Suspension Accessories for Non-Power Suspension Points (Type ST)

All Suspension Accessories can be purchased as kits or as individual components.

Suspension Kit 5

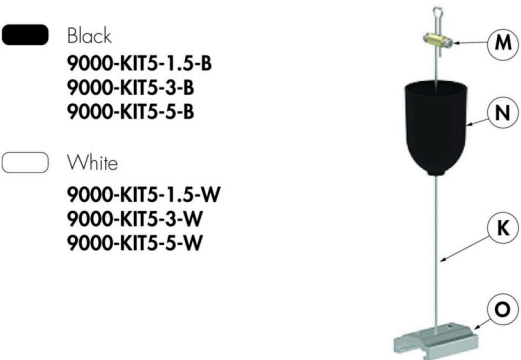

- Black
9000-KIT5-1.5-B
9000-KIT5-3-B
9000-KIT5-5-B
- White
9000-KIT5-1.5-W
9000-KIT5-3-W
9000-KIT5-5-W

Dimensions available upon request.

Individual Components

M - Ceiling Attachment



Screw Gripper
S-9000/215

N - Plastic Cup



Plastic Cup for Steel Cable
Ø0.05 in

Black S-9000/3-B
White S-9000/3-W

K - Suspension Cable



Steel Cable with Spherical End
Ø 0.05 in

S-9000/211-S-1,5 59in
S-9000/211-S-3 118in
S-9000/211-S-5 197in

O - Pendant Bracket



Short Pendant Bracket for Suspensions
(use with Steel Cable with Spherical End)

Black S-9000/312-SV-B
White S-9000/312-SV-W

If mounting kit is used above the Joining Connector (9003/B or 9003/W), please note that the **Short Pendant Bracket (S-9000/312-SV)** must be replaced with a **Long Pendant Bracket (S-9000/322-SV)** which is not included in Suspension Kit.




Long Pendant Bracket for Suspensions
to be used when Tracks are connected
with a 9003 Joint (use with Steel Cable with Spherical End).

Black S-9000/322-SV-B
White S-9000/322-SV-W

Suspension Accessories for Non-Power Suspension Points (Type ST)

All Suspension Accessories can be purchased as kits or as individual components.

Suspension Kit 6

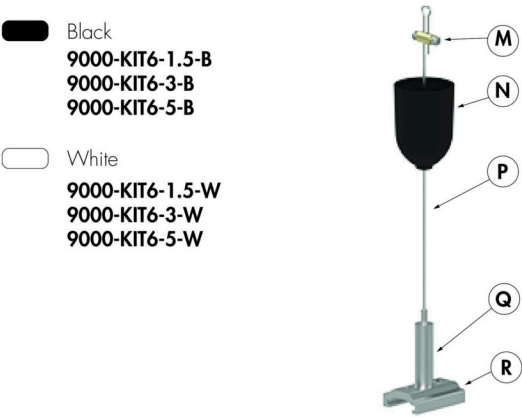

- Black

9000-KIT6-1.5-B
9000-KIT6-3-B
9000-KIT6-5-B
- White

9000-KIT6-1.5-W
9000-KIT6-3-W
9000-KIT6-5-W

Dimensions available upon request.

Individual Components

M - Ceiling Attachment



Screw Gripper
S-9000/215

N - Plastic Cup



Plastic Cup for Steel Cable
Ø0.05 in
Black S-9000/3-B
White S-9000/3-W

P - Suspension Cable



Steel Cable Ø0.05 in
S-9000/211-1,5 59in
S-9000/211-3 118in
S-9000/211-5 197in

Q - Automatic Gripper and Screw



Automatic M5 Threaded Gripper
with integrated balancing cylinder
and side hole
S-9000/218



Screw
602/F

R - Bracket with Countersunk Hole



Short Pendant Bracket with Countersunk Hole for Suspensions

- Black S-9000/312-LA-B
- White S-9000/312-LA-W

If mounting kit is used above the Joining Connector (9003/B or 9003/W), please note that the Short Pendant Bracket (S-9000/312-LA) must be replaced with a Long Pendant Bracket (S-9000/322-LA) which is not included in Suspension Kit.



Long Pendant Bracket with Countersunk Hole for Suspensions to
be used when Tracks are Connected with a 9003 Joint.

- Black S-9000/322-LA-B
- White S-9000/322-LA-W

Suspension Accessories for Non-Power Suspension Points (Type ST)

All Suspension Accessories can be purchased as kits or as individual components.

Suspension Kit 8


9000-KIT8-1.5
9000-KIT8-3
9000-KIT8-5

Black

9000-KIT8-1.5-B
9000-KIT8-3-B
9000-KIT8-5-B

White

9000-KIT8-1.5-W
9000-KIT8-3-W
9000-KIT8-5-W

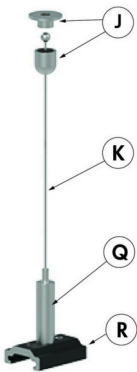

Dimensions available upon request.

Individual Components

J - Ceiling Attachment



Round Head Ceiling Attachment
S-9000/216

K - Suspension Cable



Steel Cable with Spherical End
Ø 0.05 in
S-9000/211-S-1,5 59in
S-9000/211-S-3 118in
S-9000/211-S-5 197in

Q - Automatic Gripper and Screw



Automatic M5 Threaded Gripper
with integrated balancing cylinder
and side hole
S-9000/218



Screw
602/F

R - Bracket with Countersunk Hole



Short Pendant Bracket with Countersunk Hole for Suspensions

Black

S-9000/312-LA-B

White

S-9000/312-LA-W

If mounting kit is used above the Joining Connector (9003/B or 9003/W), please note that the Short Pendant Bracket (S-9000/312-LA) must be replaced with a Long Pendant Bracket (S-9000/322-LA) which is not included in Suspension Kit.



Long Pendant Bracket with Countersunk Hole for Suspensions to be used when Tracks are Connected with a 9003 Joint.

Black

S-9000/322-LA-B

White


S-9000/322-LA-W

Suspension Accessories for Non-Power Suspension Points (Type ST)

All Suspension Accessories can be purchased as kits or as individual components.

Suspension Kit 1

9000-KIT1-1.5
9000-KIT1-3
9000-KIT1-5



Dimensions available upon request.

Individual Components

M - Ceiling Attachment



Screw Gripper
S-9000/215

P - Suspension Cable



Steel Cable Ø0.05 in
S-9000/211-1,5 59in
S-9000/211-3 118in
S-9000/211-5 197in

L - Clamp and Gripper




Clamp with Automatic Gripper
S-9000/116

Suspension Accessories for Non-Power Suspension Points (Type ST)

All Suspension Accessories can be purchased as kits or as individual components.

Suspension Kit 2

- Black
9000-KIT2-1.5-B
9000-KIT2-3-B
9000-KIT2-5-B
- White
9000-KIT2-1.5-W
9000-KIT2-3-W
9000-KIT2-5-W



Dimensions available upon request.

Individual Components

M - Ceiling Attachment



Screw Gripper
S-9000/215

S - Ceiling Bracket



Ceiling Brackets for Suspensions
S-9000/132

N - Plastic Cup



Plastic Cup for Steel Cable
Ø0.05 in
Black S-9000/3-B
White S-9000/3-W

K - Suspension Cable



Steel Cable with Spherical End
Ø 0.05 in
S-9000/211-S-1,5 59in
S-9000/211-S-3 118in
S-9000/211-S-5 197in

T - Fixing Clamp




Painted Track Fast Fixing Clamp
Black S-9000/115-B
White S-9000/115-W

Suspension Accessories for Non-Power Suspension Points (Type ST)

All Suspension Accessories can be purchased as kits or as individual components.

Suspension Kit 3

- Black
9000-KIT3-1.5-B
9000-KIT3-3-B
9000-KIT3-5-B
- White
9000-KIT3-1.5-W
9000-KIT3-3-W
9000-KIT3-5-W

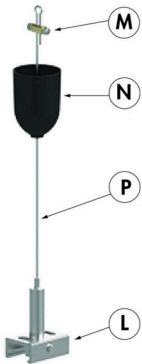

Dimensions available upon request.

Individual Components

M - Ceiling Attachment



Screw Gripper
S-9000/215

N - Plastic Cup



Plastic Cup for Steel Cable
Ø0.05 in
Black S-9000/3-B
White S-9000/3-W

P - Suspension Cable



Steel Cable Ø0.05 in
S-9000/211-1,5 59in
S-9000/211-3 118in
S-9000/211-5 197in

L - Clamp and Gripper



Clamp with Automatic Gripper
S-9000/116

Suspension Accessories for Non-Power Suspension Points (Type ST)

Suspension Kit P1 Stem

- Black
S-9000-P1-B-UL
- White
S-9000-P1-W-UL



- Black
9000-SF/12-B
9000-SF/18-B
9000-SF/24-B
9000-SF/36-B
9000-SF/48-B
- White
9000-SF/12-W
9000-SF/18-W
9000-SF/24-W
9000-SF/36-W
9000-SF/48-W

Dimensions available upon request.
3/8 in thread on each end of the Stem.

Suspension Kit P2 Stem

- Black
S-9000-P2-B-UL
- White
S-9000-P2-W-UL



- Black
9000-SF/12-B
9000-SF/18-B
9000-SF/24-B
9000-SF/36-B
9000-SF/48-B
- White
9000-SF/12-W
9000-SF/18-W
9000-SF/24-W
9000-SF/36-W
9000-SF/48-W

Dimensions available upon request.
3/8 in thread on each end of the Stem.


Additional Mounting Accessories

Fixing Clamp for Suspension



Dimensions available upon request.

Stem Bracket



Dimensions available upon request.

R - BRACKET



Optional clamp to be used for approximately 9.50mm space-off between track and surface.
Optional clamp to be used with 1/4-20 threaded rods.

Dimensions available upon request.

Fixing Clamp for 15/16 in T-bar



If Fixing clamp for 9/16" T-bar is required, please consult factory.

Dimensions available upon request.

Suspension Bracket with Automatic Gripper



Dimensions available upon request.

Automatic Gripper for aircraft cable



Dimensions available upon request.

Ceiling Clamp for surface mount




Dimensions available upon request.


Mounting Hole Position (for Type ST and R)

The track should be securely mounted in accordance with all applicable codes and standards. Mounting points to be adjusted according to maximum loads (8 ft max.). See ONE TRACK installation instructions for more information.


Top View 4 ft

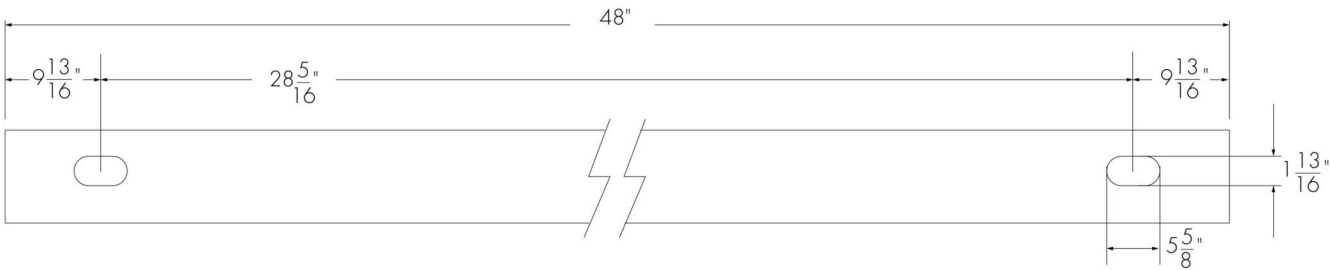

Top View 8 ft


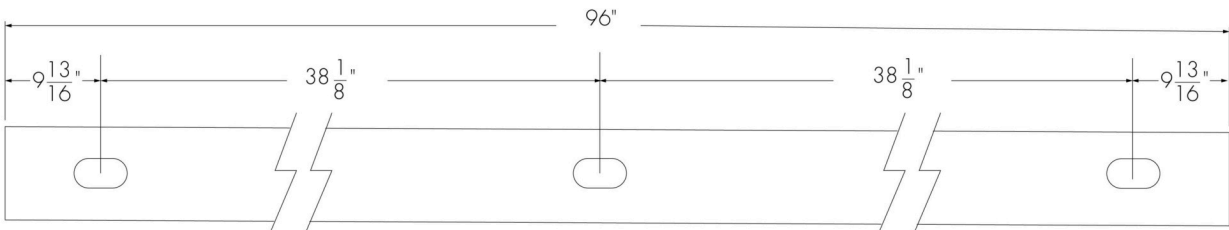


Top View 12 ft

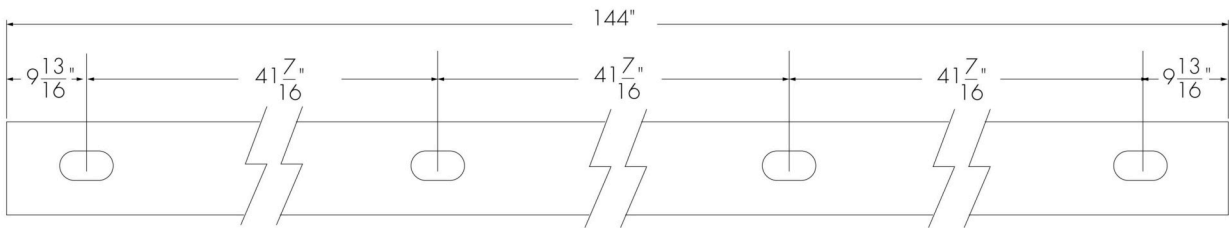


PLEASE ENSURE THAT THE DATA BUS WIRING DOES NOT CREATE A RING STRUCTURE. A FAILURE-FREE DATA BUS CANNOT BE ENSURED IF ONE IS PRESENT.

IF THE TRACK INSTALLATION REQUIRES THE USE OF "L", "T" OR "X" - SHAPED JOINT, IT IS POSSIBLE TO DISCONNECT THE DATA BUS IN THESE JOINTS TO AVOID CREATING A RING STRUCTURE.




Typical Layout Linear (Example with Type ST)

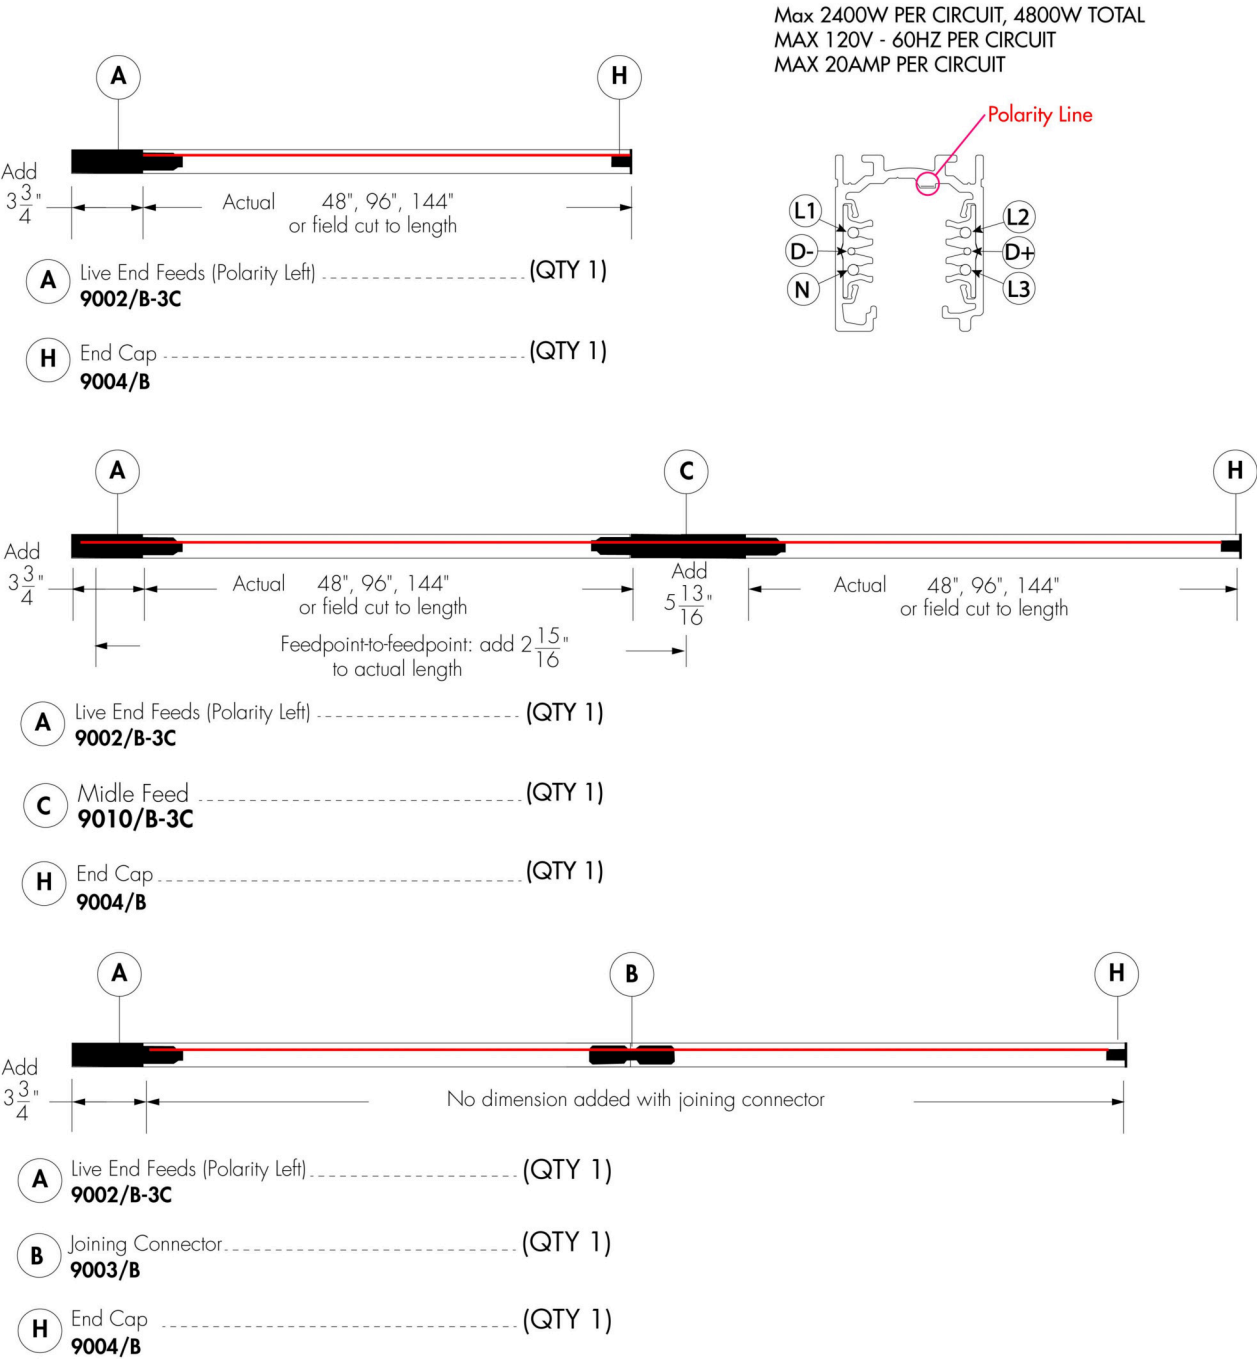

ONE TRACK is polarized and manufactured with identifying polarity line (red line on diagrams). Refer to the diagrams to ensure proper connector selection.

Typical Layout 24' x 16' Nominal (Example with Type ST)

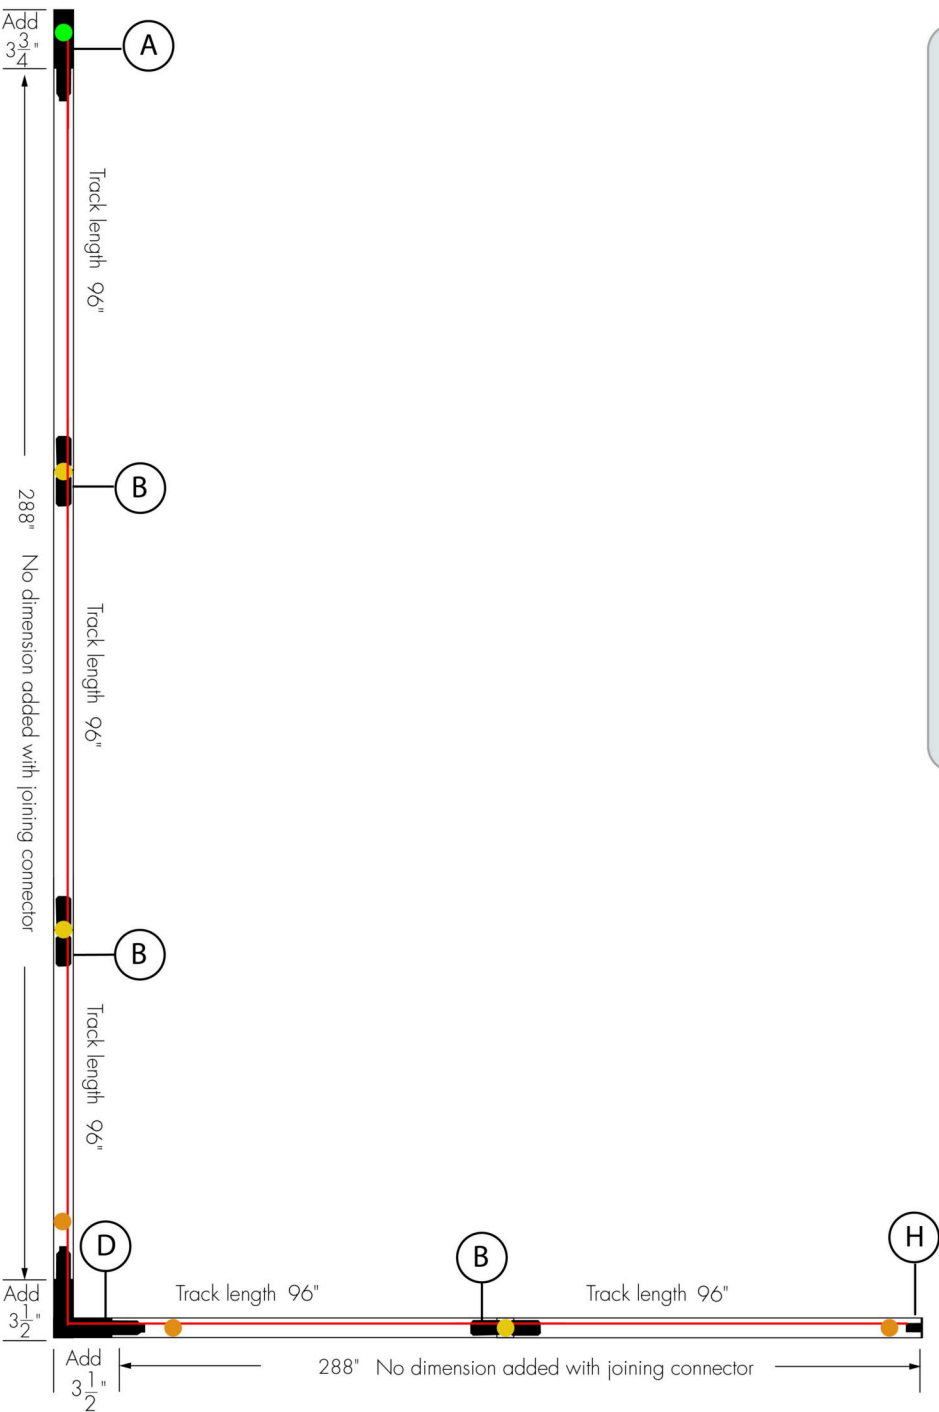

ONE TRACK UL ST 8ft

●

Power Suspension Point

●

Non-Power Suspension Point

●

Non-Power Suspension Point

9000-UL8/B-ST-120

S-9000-P3-S-B-UL-36

9000-KIT4-1.5

9000-KIT8-1.5

(QTY 5)

(QTY 1)

(QTY 3)

(QTY 3)

**When use above Joining Connector, Short Bracket must be replaced with Long Bracket S-9000/322-LA (not included in the kit).*

S-9000/322-LA

(QTY 3)

A

Live End Feeds (Polarity Left)

H

End Cap

B

Joining Connector

D

L- Feeds (Polarity Internal)

9002/B-3C

9004/B

9003/B

9011/B-3C

(QTY 1)


(QTY 1)

(QTY 3)

(QTY 1)

96 in max between mounting points. Please check installation instructions for more information regarding distributed load.

Typical Layout 16' x 24' Nominal (Example with Type ST)

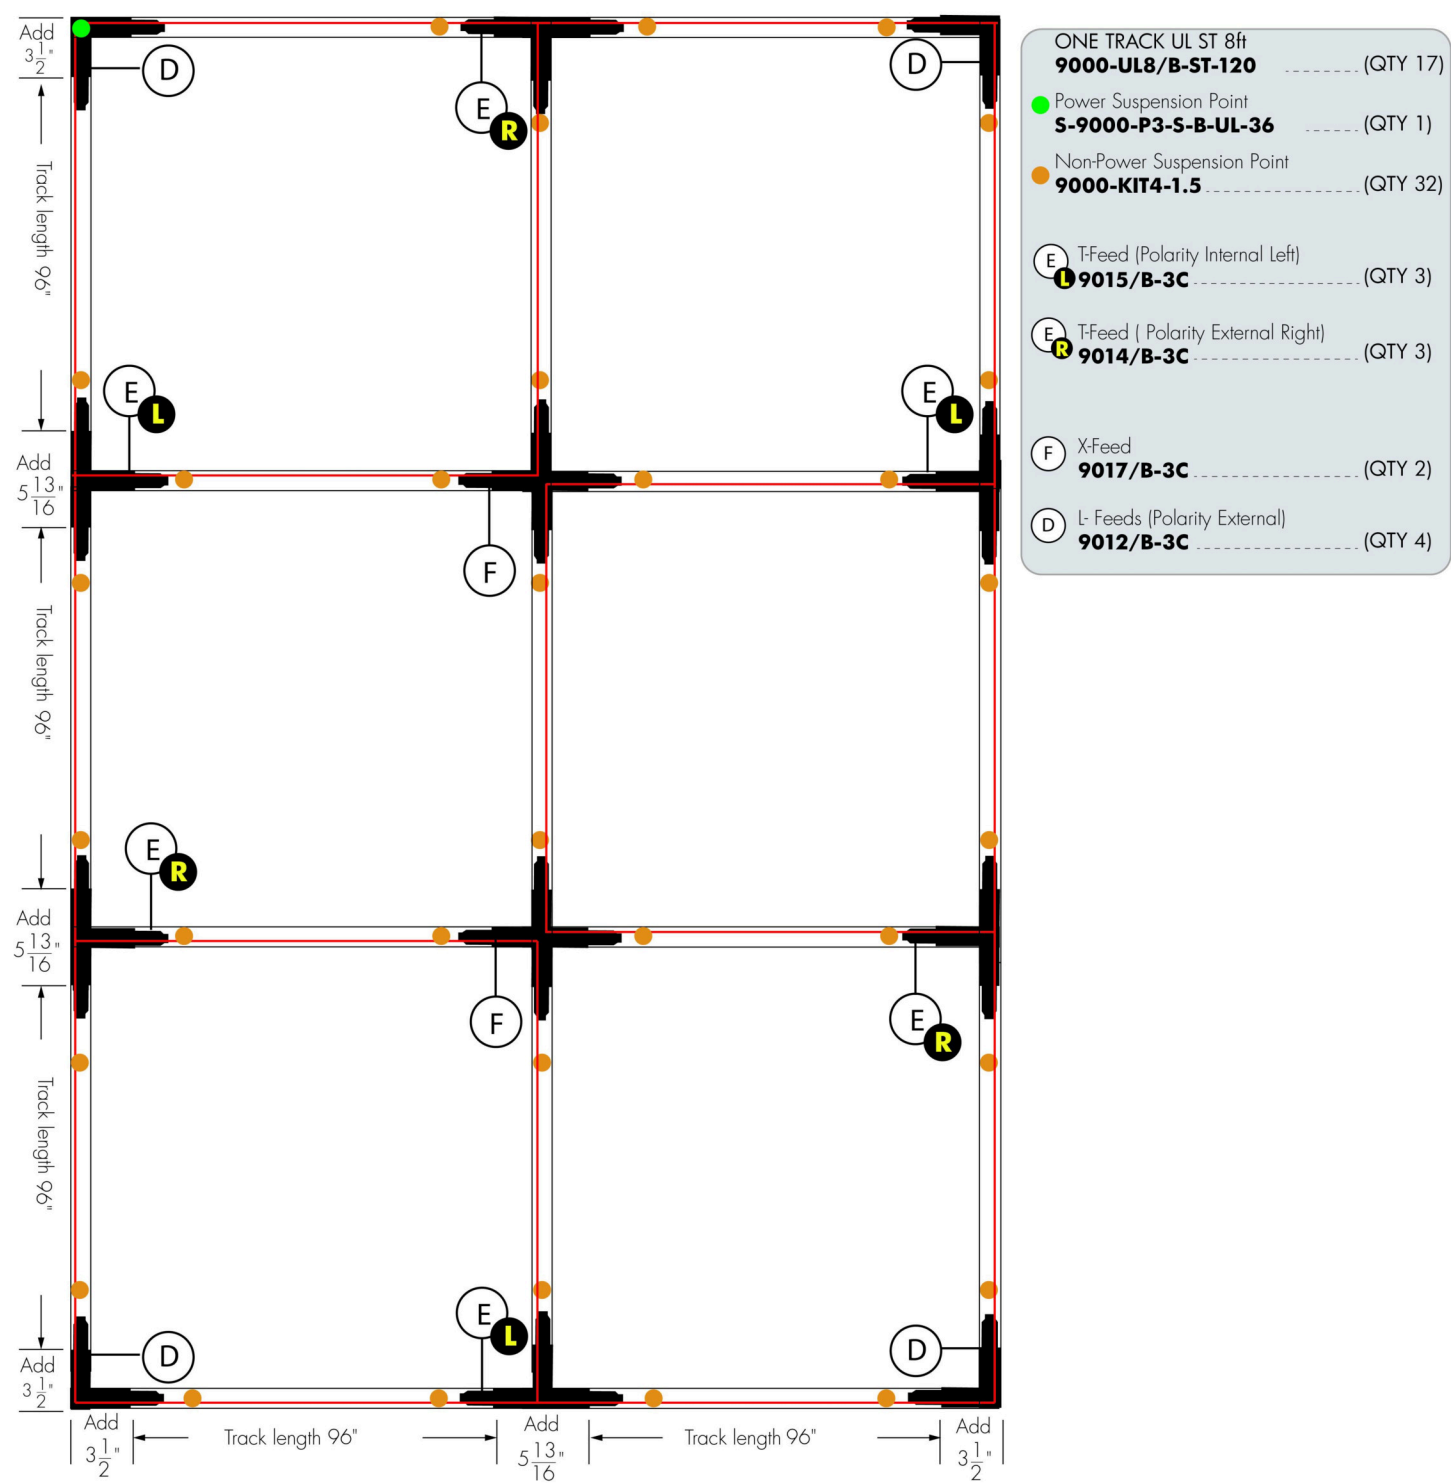

96 in max between mounting points. Please check installation instructions for more information regarding distributed load.

How to Order

Family	Length	Finish	Configuration and Circuits	Voltage
9000 ONETRACK™	UL4 4 ft UL8 8 ft UL12 12 ft ⁽¹⁾	/W White /B Black	ST 3 Circuits R 3 Circuits Recessed	120 120 Volts

Notes:

1. Available for ST configuration only.