


Project Name _____

Qty _____

Type _____ Catalog / Part Number _____

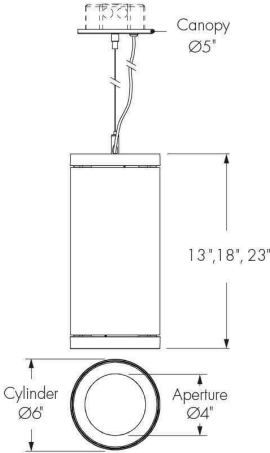

Front view

Bottom view


Photometric Summary

Based on Narrow Optic (nominal 25°), 4000K, CRI 90+

Nominal output [lm]	Delivered output [lm] ^[1]	Power (120V) [W] ^[2]	Efficacy [lm/W]	Power (277V) [W] ^[2]	Efficacy [lm/W]
700	698	6.5	107	8	87
1000	921	8	115	10	92
1300	1,256	11	114	13	97
2000	1,953	18	109	19	103

[1] Consult website for latest IES files.
[2] Add 3 watts per fixture when specifying Lumentalk™.

Optics

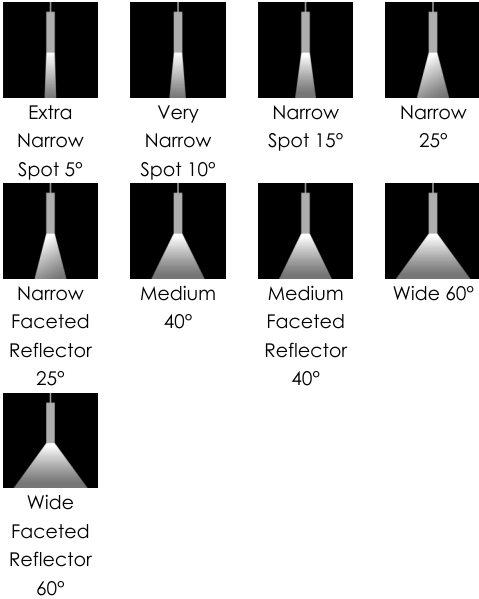

Description

The Lumencore Cylinder Medium Pendant is a high-performance LED luminaire that is ideal for commercial, residential or hospitality applications and delivers up to 4000 lumens from a 6 in diameter. The Lumencore Cylinder Medium Pendant comes in a number of finishes, or can be color-specified to fit your taste. Its accessories, beam angles, trims, and optics are easily and quickly changeable in the field.

Features

Mounting Options	Cable mounting (flat canopy or deep canopy) Stem mounting (flat canopy or deep canopy)
Suspension Length	Metal pipe (12 in, 24 in, 36 in or 48 in) Pendant cable (50 in, 100 in or 250 in, field adjustable, black or white)
Light Direction	Direct lighting
Length	13 in, 18 in, 23 in
Direct Lighting Output (Nominal Lumens)	700lm, 1000lm, 1300lm, 2000lm, 3000lm, 4000lm, 5000lm
Direct Lighting Color Temperature	2200K, 2700K, 3000K, 3500K, 4000K, Dim to Warm (2700K to 2200K), Dim to Warm Plus (3500K to 1800K), Dynamic White (2700K to 6500K), Dynamic Warm White (2200K to 3000K), Dynamic Warm White Plus (2200K to 3500K)
Direct Lighting Optics (Nominal Distribution)	Extra Narrow Spot 5°, Very Narrow Spot 10°, Narrow Spot 15°, Narrow 25°, Narrow Faceted Reflector 25°, Medium 40°, Medium Faceted Reflector 40°, Wide 60°, Wide Faceted Reflector 60°
Optical Accessories	Snoot , Half Snoot, Honeycomb Louver, Clear Glass Lens, Softening Glass Lens, Prismatic Diffuser, Linear Spread Lens Narrow (1° x 40°), Linear Spread Lens Wide (1° x 60°)
Warranty	5-year limited warranty

Colors and Color Temperatures

2200K

2700K

3000K

3500K

4000K

D_{TW}

Dim to warm

2700K - 2200K

D_{TWP}

Dim to warm plus

3500K - 1800K

D_{WH}

Dynamic white

2700K - 6500K

D_{WW}

Dynamic warm

2200K - 3000K

D_{WWP}

Dynamic warm plus

2200K - 3500K

Controls

ON/OFF PH PPH 0-10V PRO 0-10V DALI PRO DALI

DALIT8   

Finishes

MWH-Matte White

MBK-Matte Black

MBR-Matte Brown

MOR-Matte Orange

MGR-Matte Green

MBL-Matte Blue

MSI-Matte Silver

GWH-Glossy White

GBK-Glossy Black

GYL-Glossy Yellow

GLR-Glossy Red

GVI-Glossy Violet

GGR-Glossy Green

GIY-Glossy Ivory

CGY-Concrete Gray

MLG-Metalized Gray

IBR-Italian Brick Red

PWH-Target White



CC-Custom Color and Finish
(Please Specify RAL Color)

Performance

Maximum Delivered Output	Up to 5,019 lm (medium faceted reflector optic 40°, 4000K, CRI 90)
Maximum Delivered Intensity	Up to 63,952 cd (extra narrow spot optic 5°, 4000K, CRI 80)
Efficacy	Up to 141 lm/W (medium faceted reflector optic 40°, 4000K, CRI 90)
Color Consistency	2 SDCM, 3 SDCM (XN optic only)
Color Rendering	CRI 80+, CRI 90+, CRI 95+
Lumen Maintenance	L95 55,000 hrs L70 225,000 hrs
UGR	< 19

Physical

Weight	Up to 10.58 lbs
Housing Material	Aluminum
TIR Optics Material	Clear polycarbonate
Reflector Material	Aluminum

Electrical and Control

Voltage	120 Volts, 277 Volts, 347 Volts
Control	On/Off Control, Phase Dimming, Phase Dimming 1%, Standard 0-10V Dimming 1% (Linear or Logarithmic Curve), Professional 0-10V Dimming 0.1% (Linear or Logarithmic Curve), Standard DALI Dimming 1% (Linear or Logarithmic Curve), Professional DALI Dimming 0.1% (Linear or Logarithmic Curve), DALI-2 T8 Enabled Dimming 1%, Lumentalk Enabled Dimming, Lutron® Hi-lume 1% EcoSystem® LDE1/PEQ1 Soft-on/Fade-to-Black, DMX/RDM Enabled Dimming 1%

Environmental

Environment	Damp location (interior applications only)
Operating Temperature	-4 °F to 86 °F
Ingress Protection Rating	IP20

Accessories (Order Separately)

Control Boxes	DMX/RDM enabled (Daisy Chain or Star Configuration), Ethernet enabled (Daisy Chain or Star Configuration)
Control Systems	Pharos® Lighting Control Kit (PHAROS), Consult control systems section for details
Diagnostic and Addressing Tools	LumenID (LID)

Important


Virtual Patent Marking Notice

This website (<https://www.lmpg.com/patents-trademarks>) is provided to satisfy the virtual patent marking provisions of applicable jurisdictions. Some products listed may be covered by additional patents not referenced here.

Certifications




Fixture Dimensions (Shown With Flat Canopy & Cable Options)

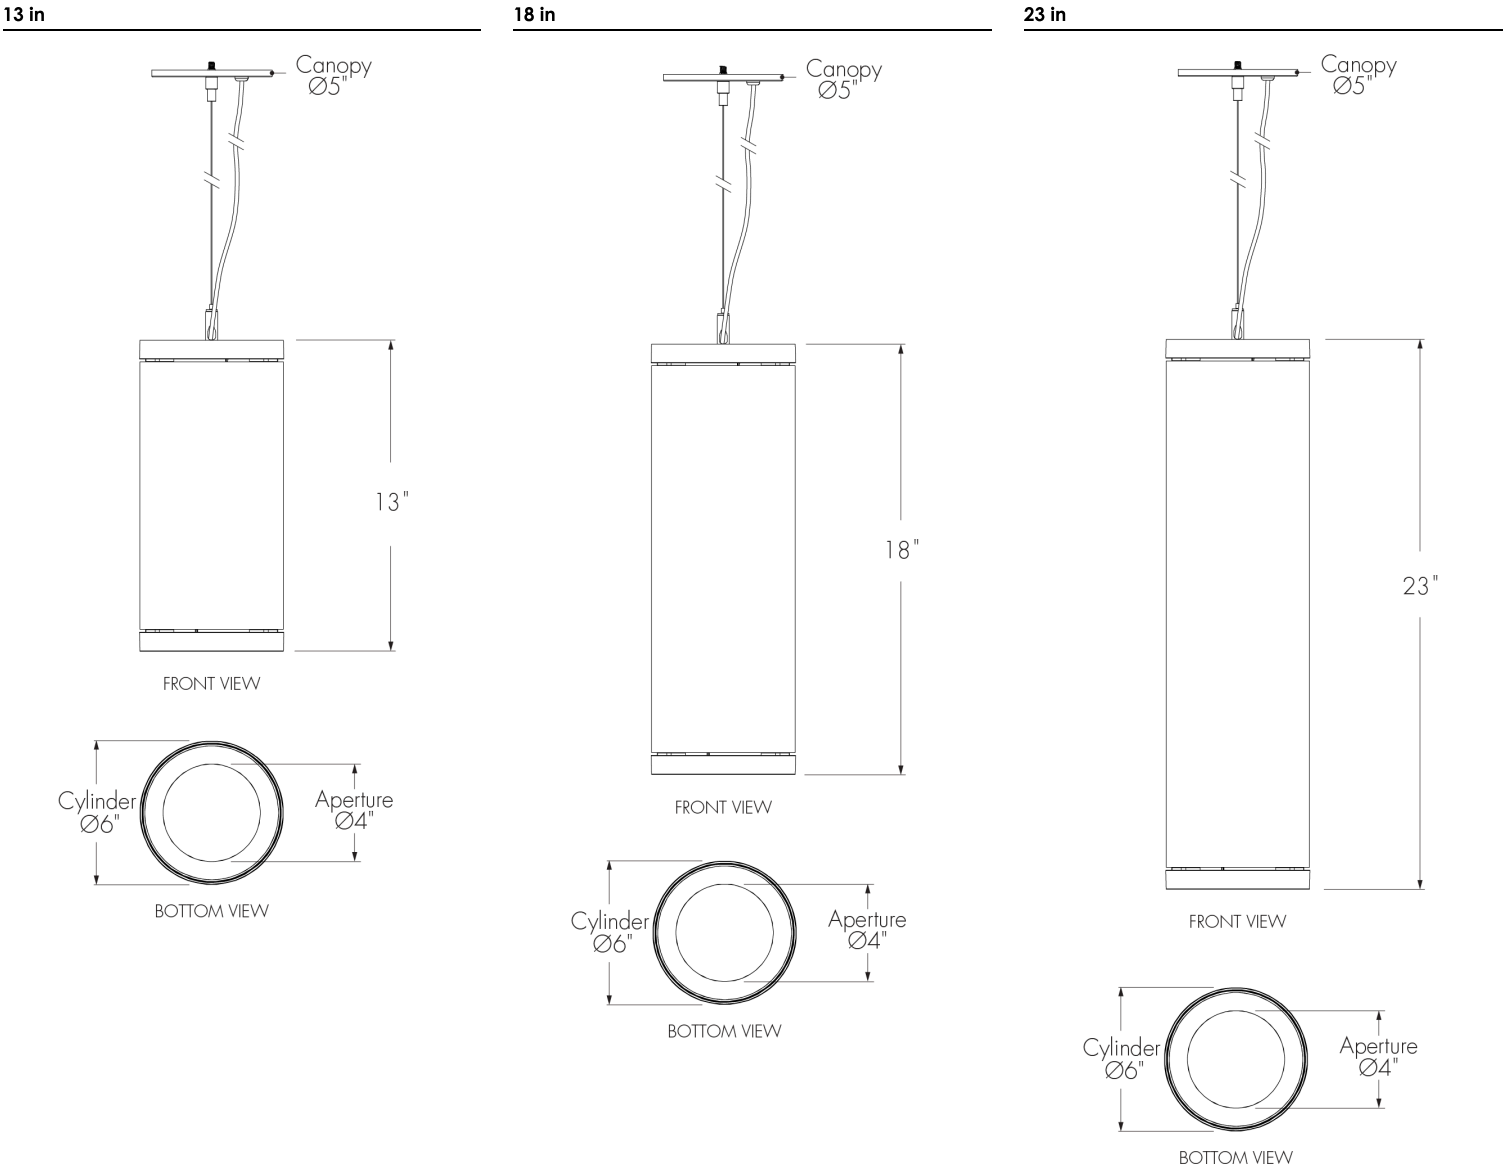


Mounting Option Dimensions (13 in Fixture Shown)


Flat Canopy & Cable Option

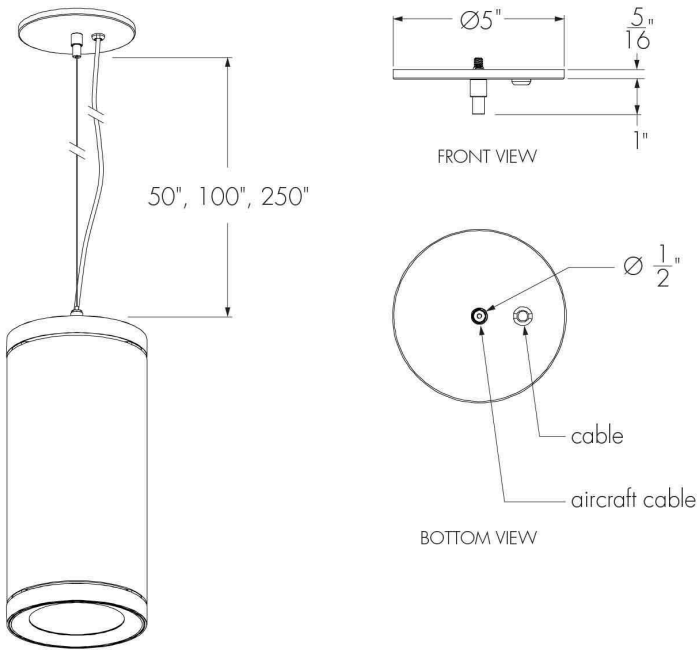



Deep Canopy & Cable Option

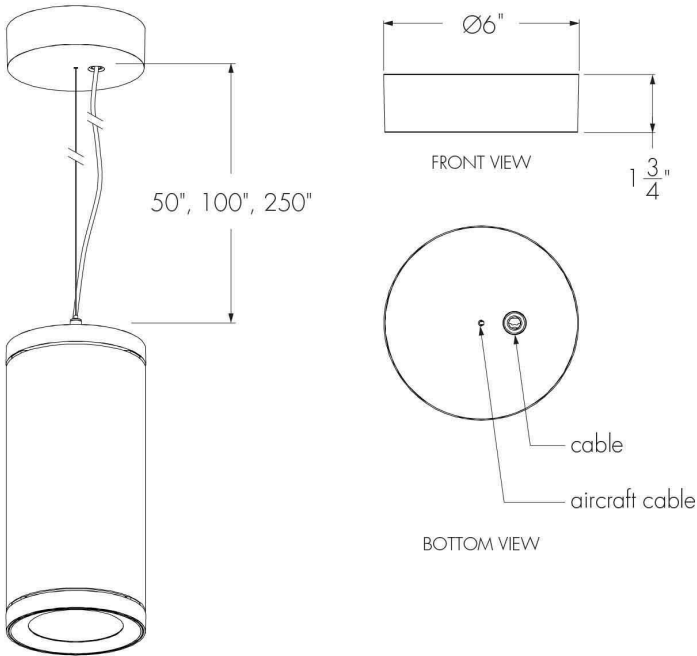


Flat Canopy & Stem Option

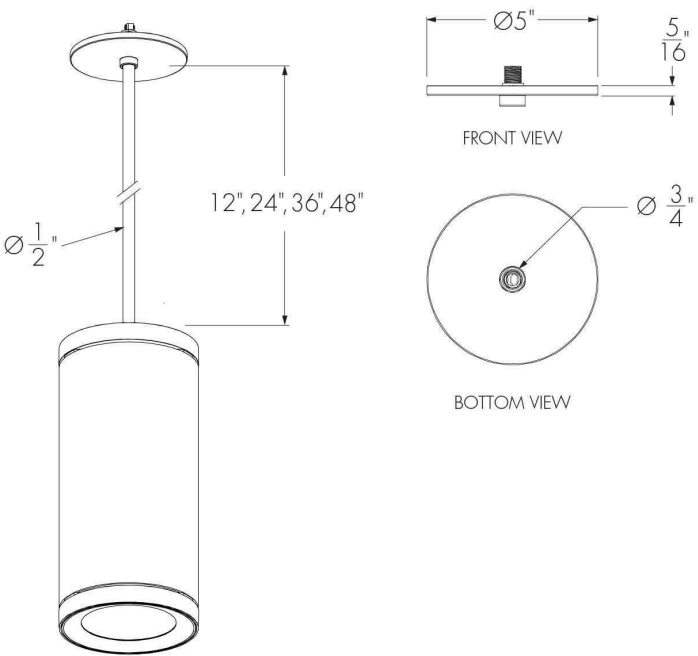

Deep Canopy & Stem Option

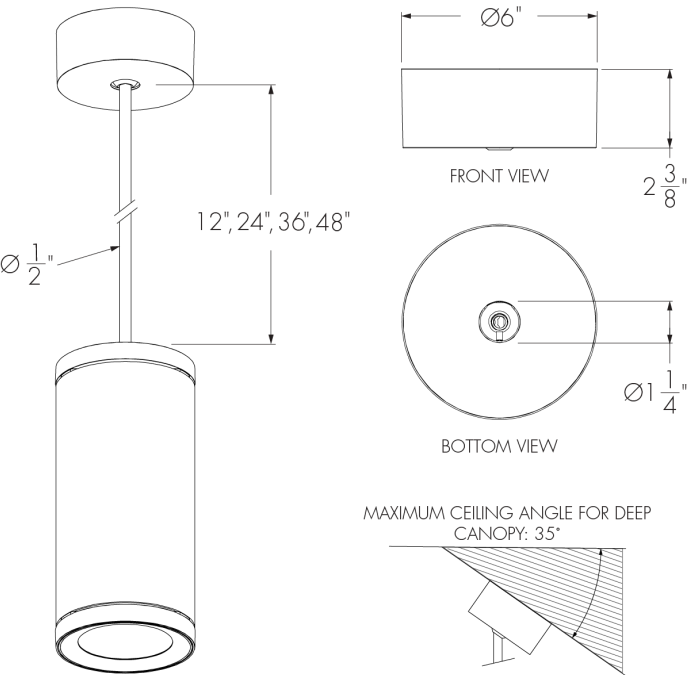

Optical Accessory Dimensions (13 in Fixture Shown)

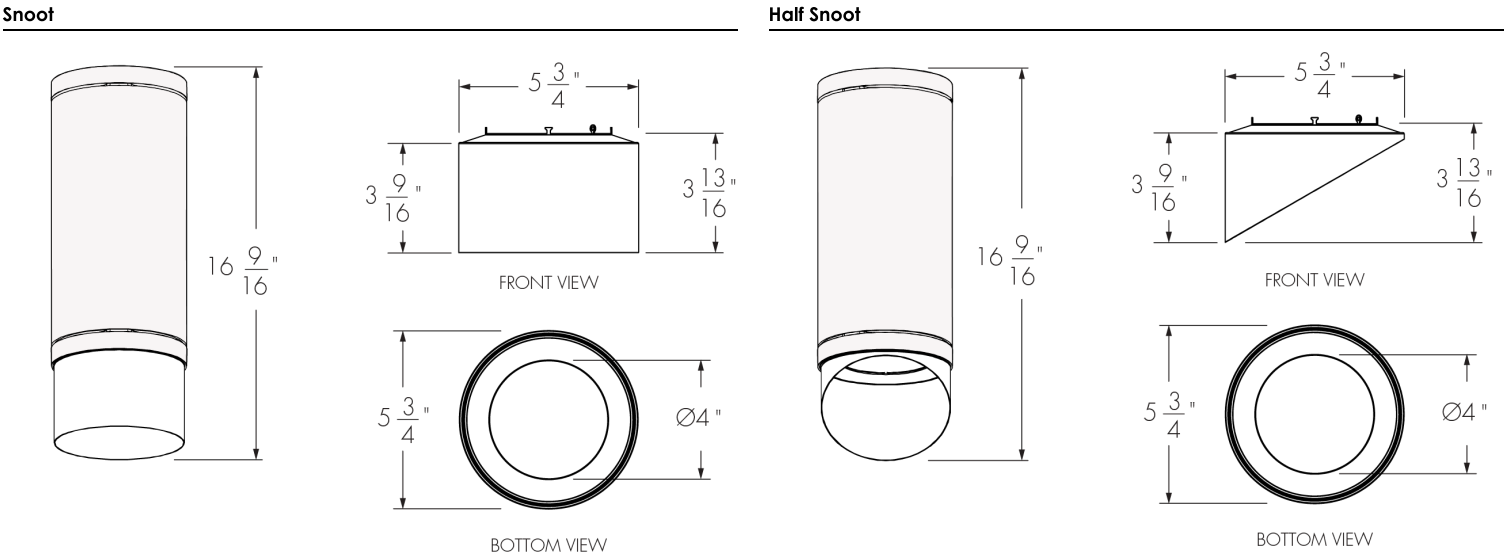

Photometric Information - Color Rendering Options Comparison, 3000K

Color sample	Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
CRI 80+	84	82	90	97	83	82	88	86	63	15	77	83	68	84	98	75
CRI 90+	94	95	98	99	95	94	97	91	80	55	93	97	83	96	99	89
CRI 95+	97	96	97	99	96	96	95	96	97	97	96	95	86	96	98	97
Radiant CRI 80+	84	83	91	96	81	82	89	83	62	15	79	80	69	85	98	76
Radiant CRI 95+	95	95	94	95	98	94	90	94	96	96	89	95	80	94	98	96

Optics

TIR Optic
XN/VN/NS/N



Semi-Specular reflector
M/W




Faceted reflector
NFR/MFR/WFR




Color and Color Temperature

Color Temperature Ranges

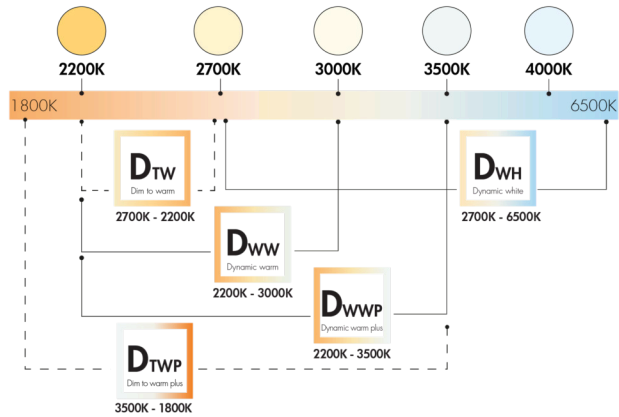

- 1 channel (DTW, DTWP) Compatible with: DA1 SDALI DMXrdm lumen talk
 - 2 channels (DWH, DWW, DWWP) Compatible with: DALI8 DMXrdm lumen talk
 - 3 channels* (DWH, DWW, DWWP) Compatible with: DALI8 DMXrdm lumen talk
- * Can be field changeable via RDM & LT for individual CCT control.

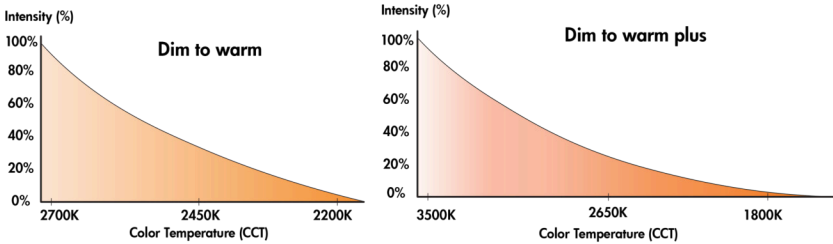

Control

On/off control

NO - On/off control

Phase dimming

PH - Phase dimming

PPH - Phase 1% dimming

Standard 0-10V dimming down to 1%

DAMC - Standard 0-10V dimming to 1% linear curve

DA1 - Standard 0-10V dimming, 1% linear

DA2 - Standard 0-10V dimming, 1% logarithmic

DA3 - Standard 0-10V dimming, 1% linear (347V)

Professional 0-10V dimming down to 0.1%

PDA1 - Pro 0-10V dimming, 0.1% linear

PDA2 - Pro 0-10V dimming, 0.1% logarithmic

Standard DALI dimming down to 1%

SDALI1 - Standard DALI dimming, 1% linear

SDALI2 - Standard DALI dimming, 1% logarithmic

Professional DALI dimming down to 0.1%

DALI1 - Pro DALI dimming, 0.1% linear

DALI2 - Pro DALI dimming, 0.1% logarithmic

DALI dimming Type 8

DALI8 - DALI-2 dimming Type 8 (multi channel capability)

Refer to How to Order Pages and the website product configurator for exceptions.

lumen talk dimming


LT - Lumentalk dimming, 1% minimum dimming value

Lutron® EcoSystem®

ES - Lutron® Hi-Lume 1% EcoSystem® LDE1/PEQ1 Soft-on/Fade-to-Black 1% minimum dimming value


DMXrdm

DMX/RDM - DMX/RDM enabled

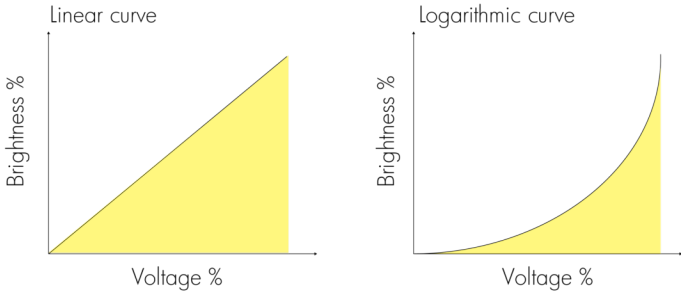


Photometric Information - Direct Lighting Optics


XN - Extra Narrow Spot (Nominal 5°), 4000K

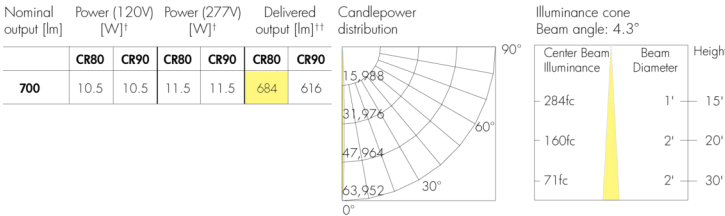


VN - Very Narrow Spot (Nominal 10°), 4000K

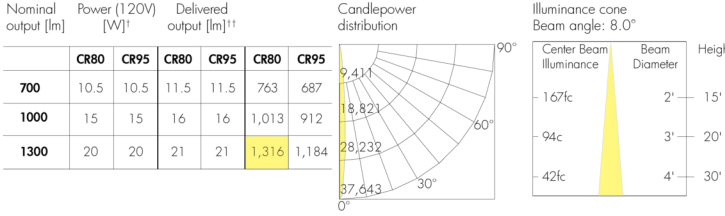


NS - Narrow Spot (Nominal 15°), 4000K

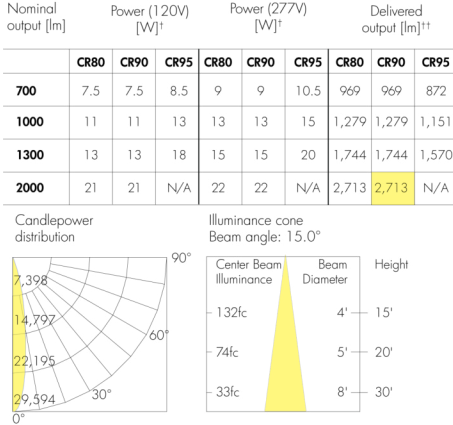


N - Narrow (Nominal 25°), 4000K

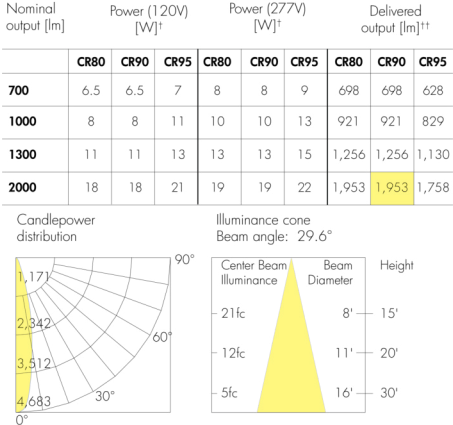

M - Medium (Nominal 40°), 4000K

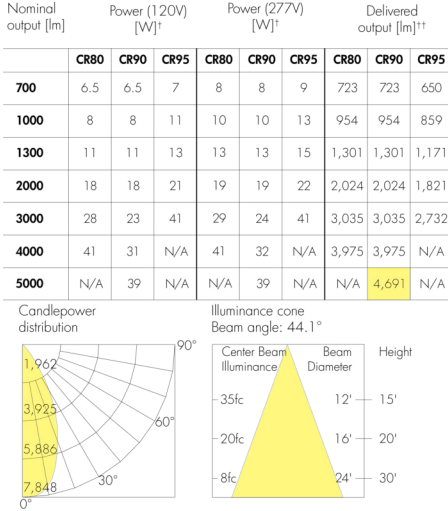

MFR - Medium Faceted Reflector (Nominal 40°), 4000K

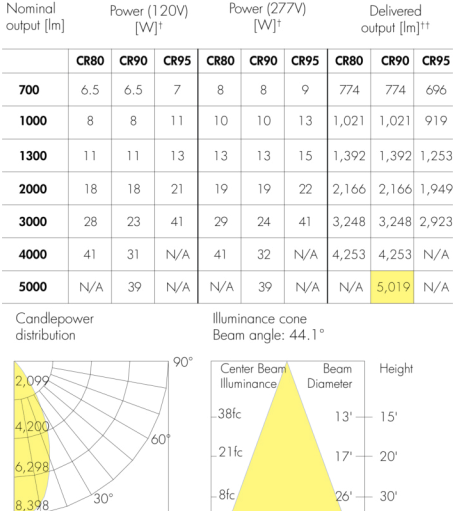


†Delivered wattage: +/- 10% tolerance. Add 3 watts per fixture when specifying Lumentalk™.
Add 3 watts for 347V combined with NS, N, NFR, M, MFR, W or WFR optics and CR90.

††Consult website for latest IES files. Delivered output: +/- 10% tolerance.

Photometric performance is measured in compliance with IESNA LM-79-24.


W - Wide (Nominal 60°), 4000K

Nominal output [lm]	Power (120V) [W]†			Power (277V) [W]†			Delivered output [lm]††		
	CR80	CR90	CR95	CR80	CR90	CR95	CR80	CR90	CR95
700	6.5	6.5	7	8	8	9	677	677	609
1000	8	8	11	10	10	13	893	893	804
1300	11	11	13	13	13	15	1,218	1,218	1,096
2000	18	18	21	19	19	22	1,894	1,894	1,705
3000	28	23	41	29	24	41	2,841	2,841	2,557
4000	41	31	N/A	41	32	N/A	3,721	3,721	N/A
5000	N/A	39	N/A	N/A	39	N/A	N/A	4,391	N/A

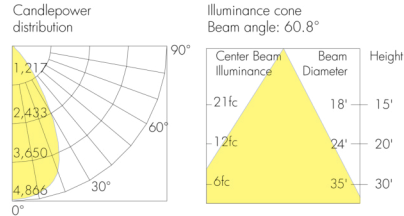

WFR - Wide Faceted Reflector (Nominal 60°), 4000K


Nominal output [lm]	Power (120V) [W]†			Power (277V) [W]†			Delivered output [lm]††		
	CR80	CR80	CR95	CR80	CR80	CR95	CR80	CR80	CR95
700	6.5	6.5	7	8	8	9	724	724	652
1000	8	8	11	10	10	13	956	956	860
1300	11	11	13	13	13	15	1,303	1,303	1,173
2000	18	18	21	19	19	22	2,027	2,027	1,824
3000	28	23	41	29	24	41	3,040	3,040	2,736
4000	41	31	N/A	41	32	N/A	3,982	3,982	N/A
5000	N/A	39	N/A	N/A	39	N/A	N/A	4,699	N/A

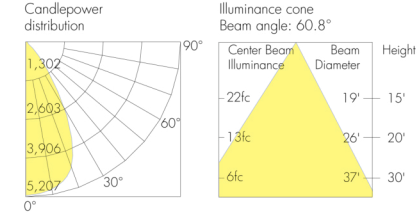

†Delivered wattage: +/- 10% tolerance. Add 3 watts per fixture when specifying Lumentalk™. Add 3 watts for 347V combined with NS, N, NFR, M, MFR, W or WFR optics and CR90.
††Consult website for latest IES files. Delivered output: +/- 10% tolerance.
Photometric performance is measured in compliance with IESNA LM-79-24.


Typical Wiring Diagrams (Refer to Installation Instructions for Additional Wiring Details)

On/Off Control (NO)

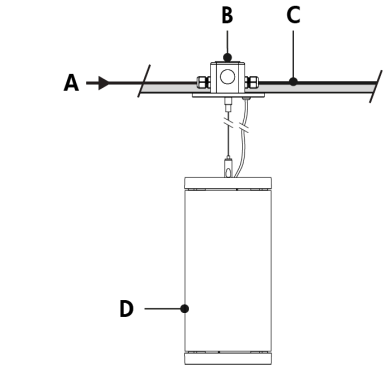

- A - Power input (120-347V)
B - 4 in octagonal/round junction box (by others)
C - Power wiring (by others)
D - Lumencore Cylinder Medium Pendant

On/Off Control (NO) - Wiring Detail

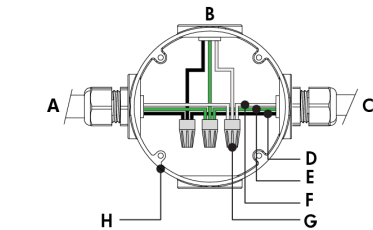


- A - Power input or from previous fixture
B - To fixture
C - To next fixture
D - Line
E - Ground
F - Neutral
G - Wire-nuts (by others)
H - 4 in octagonal/round junction box (by others)

Wiring Color Code

Color	USE
Green	Ground
Black	Line
White	Neutral
Red or purple	0-10V / Data +
Orange or grey or pink	0-10V / Data -

- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Consult Photometric Information pages for wattage information.


Phase Dimming (PH, PPH, PPH2)

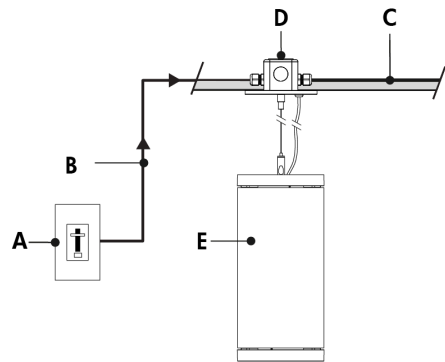

- A - Phase dimmer (by others)
- B - Phase dimmed power circuit (120V)
- C - Power wiring (by others)
- D - 4 in octagonal/round junction box (by others)
- E - Lumencore Cylinder Medium Pendant

- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Consult Photometric Information pages for wattage information.


0-10V Dimming (DAMC, DA1, DA2, DA3, PDA1, PDA2)

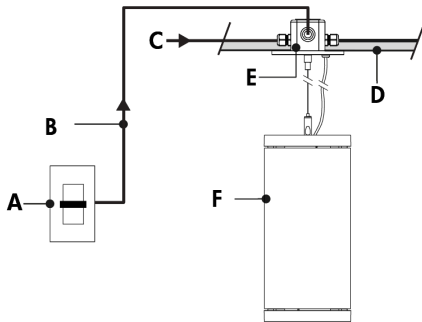

- A - Dimmer (by others)
- B - Data wiring (by others)
- C - Power input (120-347V)
- D - Power and data wiring (by others)
- E - 4 in octagonal/round junction box (by others)
- F - Lumencore Cylinder Medium Pendant

- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Consult Photometric Information pages for wattage information.

Phase Dimming (PH, PPH, PPH2) - Wiring Detail




- A - Power input or from previous fixture
- B - To fixture
- C - To next fixture
- D - Line
- E - Ground
- F - Neutral
- G - Wire-nuts (by others)
- H - 4 in octagonal/round junction box (by others)

Wiring Color Code

Color	USE
Green	Ground
Black	Line
White	Neutral
Red or purple	0-10V / Data +
Orange or grey or pink	0-10V / Data -

0-10V Dimming (DAMC, DA1, DA2, DA3, PDA1, PDA2) - Wiring Detail




- A - Power input or from previous fixture
- B - To fixture
- C - 0-10V +
- D - 0-10V -
- E - To next fixture
- F - Line
- G - Ground
- H - Neutral
- I - Wire-nuts (by others)
- J - From dimmer (by others)
- K - 4 in octagonal/round junction box (by others)

Wiring Color Code


Color	USE
Green	Ground
Black	Line
White	Neutral
Red or purple	0-10V / Data +
Orange or grey or pink	0-10V / Data -

Lumentalk (LT)

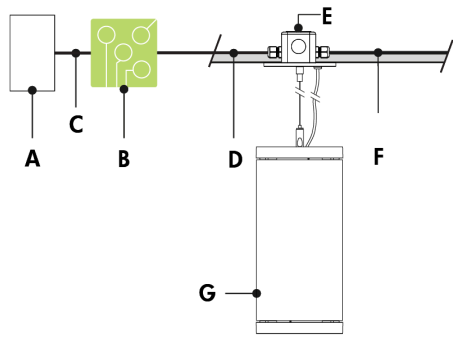

- A - Dimmer/controller (by others)
- B - Lumentranslator 2 (LTL2-DIM, -DMX, -TRIAC, -DALI)
- C - Data wiring (by others)
- D - Power line (120-277V AC)
- E - 4 in octagonal/round junction box (by others)
- F - Power wiring (by others)
- G - Lumencore Cylinder Medium Pendant

Lumentalk (LT) - Wiring Detail



- A - Power input (control over power line via Lumentalk system) or from previous fixture
- B - To fixture
- C - To next fixture
- D - Line
- E - Ground
- F - Neutral
- G - Wire-nuts (by others)
- H - 4 in octagonal/round junction box (by others)

Wiring Color Code

Color	USE
Green	Ground
Black	Line
White	Neutral
Red or purple	0-10V / Data +
Orange or grey or pink	0-10V / Data -

- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Lumentalk enabled fixtures must be commissioned using LumentalkID software and a LID-LT. Consult factory for details.
- Maximum of 1 transmitter (Lumentranslator 2 or Lumenlink) per system. No third party fixtures allowed on the same circuit.
- For DMX applications: 1 DMX controller per Lumentalk network, maximum of 48 DMX channels per Lumentalk network (minimum step transition update rate is 1 second, minimum fade time between two colors is 1 minute). Consult factory for DALI Lumentalk applications. Consult factory for applications that require additional capabilities.
- Consult Photometric Information pages for wattage information.

Optical Accessories

SN - Snoot




LACYM - SN

CL - Clear Glass Lens



LACYM - CL

LSN - Linear Spread Lens Narrow (1° x 40°)



Horizontal Beam Distribution

LACYM - LSN

HSN - Half Snoot




LACYM - HSN

SL - Softening Glass Lens



LACYM - SL


LSW - Linear Spread Lens Wide (1° x 60°)



Horizontal Beam Distribution

LACYM - LSW

HL - Honeycomb Louver



LACYM - HL



PD - Prismatic Diffuser



LACYM - PD



Control Boxes (Order Separately)

CBX-DMX/RDM - DMX/RDM Enabled (Daisy Chain or Star Configuration)



DMX/RDM control box. Up to six power and data outputs to fixtures or fixture runs. Consult CBX specification sheet and installation instructions for details. Lumeterminators provided with CBX (2x for Daisy Chain configuration, 6x for Star configuration), consult factory to order spares.

CBX-ENET - Ethernet Enabled (Daisy Chain or Star Configuration)



Ethernet control box. Up to four power and data outputs to fixture or fixture runs. Consult Ethernet CBX specification sheet and installation instructions for details.

Control Systems (Order Separately)

PHAROS - Pharos® Designer Lighting Control Kit



The Pharos Designer Lighting Control Kit, available for 1 or 2 DMX universes, allows for complete control of large lighting installations.

Diagnostic And Addressing Tools (Order Separately)

LID - LumenID



The updated LumenID (LID) is now your all-in-one diagnostic and addressing solution for both DMX/RDM and Lumentalk (LT) systems. Engineered for versatility, it streamlines commissioning and troubleshooting across protocols—no need for multiple tools. Consult the LID specification sheet for full details.

How to Order

Housing ⁽¹⁾	Certification	Mounting	Mounting Option Finish	Mounting Length	Light Direction	Voltage	Length	Direct Lighting Output (Nominal Lumens)	Direct Lighting Color Temperature
LACYM Lumencore Cylinder Medium - Ø6 in	A UL/cUL	PMF Pendant Mount Flat Canopy (Aircraft Cable)	MWH Matte White	M1 Metal Pipe (12 in) ⁽⁵⁾	D Direct lighting	120 120 Volts	13 13 in	dL07 700lm	22K 2200K ⁽⁸⁾ ⁽¹³⁾
			MBK Matte Black	M2 Metal Pipe (24 in) ⁽⁵⁾		277 277 Volts	18 18 in	dL10 1000lm ⁽⁹⁾	27K 2700K
		PMD Pendant Mount Deep Canopy (Aircraft Cable)	MSI Matte Silver	M3 Metal Pipe (36 in) ⁽⁵⁾		347 347 Volts ⁽⁷⁾ ⁽⁸⁾	23 23 in	dL13 1300lm ⁽⁹⁾	30K 3000K
		PSF Pendant Stem Mount Flat Canopy ⁽²⁾	CC Custom Color ⁽³⁾ ⁽⁴⁾	M4 Metal Pipe (48 in) ⁽⁵⁾				dL20 2000lm ⁽¹⁰⁾	35K 3500K
		PSD Pendant Stem Mount Deep Canopy ⁽²⁾		ACC50BK Silver Aircraft Cable/Black Electrical Cable (50 in, Field Adjustable) ⁽⁶⁾				dL30 3000lm ⁽¹¹⁾	40K 4000K
				ACC100BK Silver Aircraft Cable/Black Electrical Cable (100 in, Field Adjustable) ⁽⁶⁾				dL40 4000lm ⁽¹¹⁾	DTW Dim to Warm (2700K to 2200K) ⁽¹⁴⁾ ⁽¹⁵⁾
				ACC250BK Silver Aircraft Cable/Black Electrical Cable (250 in, Field Adjustable) ⁽⁶⁾				dL50 5000lm ⁽¹¹⁾ ⁽¹²⁾	DTWP Dim to Warm Plus (3500K to 1800K) ⁽¹⁴⁾ ⁽¹⁵⁾
				ACC50WH Silver Aircraft Cable/White Electrical Cable (50 in, Field Adjustable) ⁽⁶⁾					DWH Dynamic White (2700K to 6500K) ⁽¹⁵⁾ ⁽¹⁶⁾
				ACC100WH Silver Aircraft Cable/White Electrical Cable (100 in, Field Adjustable) ⁽⁶⁾					DWW Dynamic Warm White (2200K to 3000K) ⁽¹⁵⁾ ⁽¹⁶⁾
				ACC250WH Silver Aircraft Cable/White Electrical Cable (250 in, Field Adjustable) ⁽⁶⁾					DWWP Dynamic Warm White Plus (2200K to 3500K) ⁽¹⁵⁾ ⁽¹⁶⁾

Notes:

1. Refer to website product configurator for all exceptions.

2. Stem finish matches fixture housing color.

3. Refer to Finish section for additional color codes (ex. MGR).

4. Longer lead times can be expected for custom RAL color finishes.

5. Metal pipe available for PSF and PSD mounting options only.

6. Available for PMF and PMD mounting options only.

7. Not available for 700 lumens.

8. Not available for XN and VN optics.
9. Available for VN, NS, N, NFR, M, MFR, W and WFR optics only.

10. Available for NS, N, NFR, M, MFR, W and WFR optics only.

11. Available for NFR, M, MFR, W and WFR optics only.

12. Available for CR90 only.

13. Available for CR80 only.

14. Available for 1000, 1300 and 2000 lumens when combined with NFR, M, MFR, W and WFR optics only.

15. NFR, MFR and WFR faceted reflector optics are recommended for optimal performance.

16. Available for 1300 lumens when combined with CR80 and NFR, M, MFR, W or WFR optics only.

How to Order

Direct Lighting Color Rendering	Direct Lighting Optics (Nominal Distribution)	Direct Lighting Control ⁽²²⁾	Direct Lighting Accessories ⁽⁴⁵⁾ ⁽⁴⁶⁾	Finish	Bezel	Bezel Finish
CR80 CRI 80+ ⁽¹⁷⁾	XN Extra Narrow Spot 5° ⁽¹⁹⁾	NO On/Off Control ⁽²³⁾ ⁽²⁴⁾ ⁽²⁵⁾	NA No Accessory	MWH Matte White	b Bezel	MWH Matte White
CR90 CRI 90+	VN Very Narrow Spot 10° ⁽²⁰⁾	PH Phase Dimming ⁽²⁵⁾ ⁽²⁶⁾ ⁽²⁷⁾ ⁽²⁸⁾	SN Snoot ⁽⁴⁷⁾	MBK Matte Black		MBK Matte Black
CR95 CRI 95+	NS Narrow Spot 15° ⁽²¹⁾	PPH Phase Dimming 1% ⁽⁸⁾ ⁽²⁵⁾ ⁽²⁸⁾ ⁽²⁹⁾ ⁽³⁰⁾	HSN Half Snoot ⁽⁴⁷⁾	MBR Matte Brown		MBR Matte Brown
RCR80 Radiant CRI 80+ ⁽⁸⁾ ⁽¹⁸⁾	N Narrow 25° ⁽²¹⁾	DAMC Standard 0-10V Dimming 1% Linear Curve ⁽²⁵⁾ ⁽²⁹⁾ ⁽³¹⁾ ⁽³²⁾ ⁽³³⁾	HL Honeycomb Louver ⁽⁴⁸⁾	MOR Matte Orange		MOR Matte Orange
RCR95 Radiant CRI 95+ ⁽⁸⁾ ⁽¹⁸⁾	NFR Narrow Faceted Reflector 25°	DA1 Standard 0-10V Dimming 1% Linear Curve ⁽²⁴⁾ ⁽³⁴⁾ ⁽³⁵⁾	CL Clear Glass Lens	MGR Matte Green		MGR Matte Green
	M Medium 40°	DA2 Standard 1-10V Dimming 1% Logarithmic Curve ⁽²⁴⁾ ⁽³⁴⁾ ⁽³⁵⁾	SL Softening Glass Lens	MBL Matte Blue		MBL Matte Blue
	MFR Medium Faceted Reflector 40°	DA3 Standard 0-10V Dimming 1% Linear Curve (347V) ⁽²⁴⁾ ⁽³⁵⁾	PD Prismatic Diffuser ⁽⁴⁹⁾	MSI Matte Silver		MSI Matte Silver
	W Wide 60°	PDA1 Professional 0-10V Dimming 0.1% Linear Curve ⁽²⁴⁾ ⁽²⁵⁾ ⁽³⁴⁾	LSN Linear Spread Lens Narrow (1° x 40°) ⁽⁵⁰⁾ ⁽⁵¹⁾	GWH Glossy White		GWH Glossy White
	WFR Wide Faceted Reflector 60°	PDA2 Professional 0-10V Dimming 0.1% Logarithmic Curve ⁽²⁴⁾ ⁽²⁵⁾ ⁽³⁴⁾	LSW Linear Spread Lens Wide (1° x 60°) ⁽⁵¹⁾ ⁽⁵²⁾	GBK Glossy Black		GBK Glossy Black
		SDALI1 Standard DALI Dimming 1% Linear Curve ⁽³³⁾ ⁽³⁶⁾		GYL Glossy Yellow		GYL Glossy Yellow
		SDALI2 Standard DALI Dimming 1% Logarithmic Curve ⁽³³⁾ ⁽³⁶⁾		GLR Glossy Red		GLR Glossy Red
		DALI1 Professional DALI Dimming 0.1% Linear Curve ⁽²⁴⁾ ⁽²⁵⁾ ⁽³⁷⁾		GVI Glossy Violet		GVI Glossy Violet
		DALI2 Professional DALI Dimming 0.1% Logarithmic Curve ⁽²⁴⁾ ⁽²⁵⁾ ⁽³⁷⁾		GGR Glossy Green		GGR Glossy Green
		DALI18 DALI-2 T8 Enabled Dimming 1% ⁽³⁸⁾ ⁽³⁹⁾		GIY Glossy Ivory		GIY Glossy Ivory
		ES Lutron® Hi-lume 1% EcoSystem® LDE1/PEQ1 Soft-on/Fade-to-Black ⁽⁸⁾ ⁽²⁵⁾ ⁽⁴⁰⁾		CGY Concrete Grey		CGY Concrete Grey
		LT Lumentalk Enabled Dimming ⁽⁴¹⁾ ⁽⁴²⁾		MLG Metalized Grey		MLG Metalized Grey
		DMX/RDM DMX/RDM Enabled Dimming 1% ⁽⁴¹⁾ ⁽⁴³⁾ ⁽⁴⁴⁾		IBR Italian Brick Red		IBR Italian Brick Red
				PWH Parget White		PWH Parget White
				CC Custom Color & Finish ⁽⁴⁾		CC Custom Color & Finish ⁽⁴⁾

Notes:

- 4.** Longer lead times can be expected for custom RAL color finishes.

8. Not available for XN and VN optics.

17. Available for 2200K, 2700K, 3000K, 3500K, 4000K and DWH, DWW or DWWP color options only.

18. Radiant CRI options available for 3000K only.

19. Available for 700 lumens when combined with CR80 or CR90 color rendering options only.

20. Available for 700, 1000 and 1300 lumens when combined with CR80 or CR90 color rendering options only.

21. Available up to 2000 lumens.

22. Control options vary according to color temperature, color rendering and optics combination. Refer to website product configurator for details.

23. Manufacturer's choice driver. Order code may change to NO1.

24. Available up to 1300 lumens (CR80, RCR80, CR90, CR95 or RCR95) and 2000 lumens (CR80, RCR80 or CR90) for NS optic. Available up to 2000 lumens (CR80, RCR80, CR90, CR95 or RCR95) for N optic. Available up to 4000 lumens (CR80, RCR80 or CR90) for NFR, M, MFR, W and WFR optics, and up to 5000 lumens (CR90) for NFR, M, MFR, W and WFR optics.

25. Not available for DTW, DTWP, DWH, DWW or DWWP color options.

26. Manufacturer's choice driver. Order code may change to PH1 or PH2.

27. Available up to 1300 lumens (CR80, RCR80, CR90, CR95 or RCR95) and 2000 lumens (CR80, RCR80 or CR90) for NS and N optics. Available up to 3000 lumens (CR80, RCR80 or CR90) for NFR, M, MFR, W and WFR optics.

28. Available for 120V voltage option only.
- 29.** Available up to 3000 lumens when combined with CR80 or CR90 color rendering option. Available up to 2000 lumens when combined with CR80, CR90 or CR95 color rendering options.

30. Manufacturer's choice driver. Order code is subject to change.

31. Manufacturer's choice driver. Order code may change to DAMC1 or DAMC2.

32. Not available for XN and VN optics.

33. Not available with 347V.

34. Driver cuts off power to the fixture when the control signal drops below 0.5V.

35. Not available for DWH, DWW or DWWP color options.

36. Available for DTW and DTWP color options only, when combined with 1000, 1300 or 2000 lumens.

37. Consult factory for other DALI control options for static color temperatures.

38. Available for DWH, DWW and DWWP color options only. DALI-2 Type 8 controller required.

39. Consult factory for DALI18 control option.

40. One EcoSystem® address per fixture, 1% minimum dimming value. Lutron® EcoSystem® Enabled dimming not available for 700 lumens, 1000 or 5000 lumens.

41. Available up to 1300 lumens (CR80, RCR80, CR90, CR95 or RCR95) and 2000 lumens (CR80, RCR80 or CR90) for NS optic. Available up to 2000 lumens (CR80, RCR80, CR90, CR95 or RCR95) for N, NFR, M, MFR, W and WFR optics.

42. A Lumentranslator 2 (LTL2) and LumenID (LID) must be specified for Lumentalk applications. Consult Lumentranslator 2 and Lumentalk pages and specification sheets for details.

- 43.** A Control Box (CBX-DS or CBX-ST) and lumenID (LID) must be specified.

44. Configurable to 1, 2, or 3 channel control via RDM in the field.

45. Accessories specified in the fixture code are factory installed but can also be changed in the field. Refer to installation instructions for details. To order accessories separately, refer to the Optical Accessories section of the specification sheet.

46. Maximum of two lenses can be installed per fixture. The Snoot (SN) or Half Snoot (HSN) can be combined with any accessory. The Clear Glass Lens (GL) and Softening Glass Lens (SL) cannot be combined together. The Linear Spread Lenses (LSN and LSW) are compatible with the Snoot and Half Snoot accessories only.
- 47.** Matte black interior surface, exterior finish matches housing color.

48. When combined with another accessory, the HL will be factory-installed in second position (furthest from the LED source).

49. Can be combined with HL accessory for 2200K, 2700K, 3000K, 3500K and 4000K color options only.

50. Nominal 10° x 40° distribution when used with the NS optic.

51. Available for XN, VN, NS, N and NFR optics when combined with 2200K, 2700K, 3000K, 3500K, 4000K color options only. Available for NFR optic only when combined with DTW, DTWP, DWH, DWW or DWWP color options only.

52. Nominal 10° x 60° distribution when used with the NS optic.