



Project Name _____

Qty _____

Type _____

Catalog / Part Number _____



Front view

Bottom view

Photometric Summary


Based on Narrow Optic (nominal 25°), 4000K, CRI 90+

Nominal output [lm]	Delivered output [lm] ^[1]	Power (120V) [W] ^[2]	Efficacy [lm/W]	Power (277V) [W] ^[2]	Efficacy [lm/W]
700	698	6.5	107	8	87
1000	921	8	115	10	92
1300	1,256	11	114	13	97
2000	1,953	18	109	19	103

[1] Consult website for latest IES files.

[2] Add 3 watts per fixture when specifying Lumentalk™.

Optics

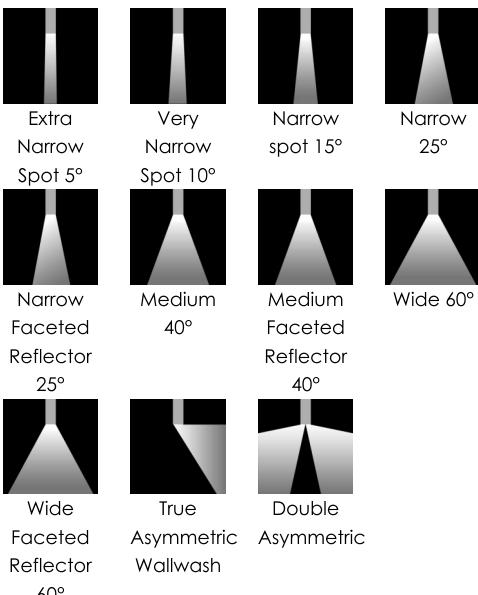

Description

The Lumencore Cylinder Small Surface Mount is a high-performance LED luminaire that is ideal for commercial, residential or hospitality applications and delivers up to 3000 lumens from a 4 in diameter. The Lumencore Cylinder Small Surface Mount comes in a number of finishes, or can be color-specified to fit your taste. Its accessories, beam angles, trims, and optics are easily and quickly changeable in the field.

Features

Mounting	Surface Mount
Light Direction	Direct lighting
Length	13 in, 18 in, 23 in
Direct Lighting Output (Nominal Lumens)	700lm, 1000lm, 1300lm, 2000lm, 3000lm
Direct Lighting Color Temperature	2200K, 2700K, 3000K, 3500K, 4000K, Dim to Warm (2700K to 2200K), Dim to Warm Plus (3500K to 1800K), Dynamic White (2700K to 6500K), Dynamic Warm White (2200K to 3000K), Dynamic Warm White Plus (2200K to 3500K)
Direct Lighting Optics (Nominal Distribution)	Extra Narrow Spot 5°, Very Narrow Spot 10°, Narrow Spot 15°, Narrow 25°, Narrow Faceted Reflector 25°, Medium 40°, Medium Faceted Reflector 40°, Wide 60°, Wide Faceted Reflector 60°, True Asymmetric Wallwash, Double Asymmetric
Optical Accessories	Snoot, Half Snoot, Honeycomb Louver, Concentric Ring Louver, Clear Glass Lens, Softening Glass Lens, Prismatic Diffuser, Linear Spread Lens Narrow (1° x 40°), Linear Spread Lens Wide (1° x 60°), Decorative Ring

Warranty

5-year limited warranty

Performance

Maximum Delivered Output	Up to 3,210 lm (wide faceted reflector optic 60°, 4000K, CRI 90)
---------------------------------	--

Colors and Color Temperatures**Controls**

ON/OFF PH PPH 0-10V PRO 0-10V DALI PRO DALI
DALIT8 LUTRON lumenpulse DMXrdm

Finishes

CC-Custom Color and Finish
(Please Specify RAL Color)

Certifications**Maximum Delivered Intensity**

Up to 63,952 cd (extra narrow spot optic 5°, 4000K, CRI 80)

Efficacy

Up to 129 lm/W (narrow spot optic 15°, 4000K, CRI 80)

Color Consistency

2 SDCM, 3 SDCM (XN optic only)

Color Rendering

CRI 80+, CRI 90+, CRI 95+

Lumen Maintenance

L95 55,000 hrs

L70 225,000 hrs

UGR

< 19 (not applicable to WW and DAS distributions)

Physical**Weight**

Up to 7.62 lbs

Housing Material

Aluminum

TIR Optics Material

Clear polycarbonate

Reflector Material

Aluminum

Electrical and Control**Voltage**

120 Volts, 277 Volts, 347 Volts

Control

On/Off Control, Phase Dimming, Phase Dimming 1%, Standard 0-10V Dimming 1% (Linear or Logarithmic Curve), Professional 0-10V Dimming 0.1% (Linear or Logarithmic Curve), Standard DALI Dimming 1% (Linear or Logarithmic Curve), Professional DALI Dimming 0.1% (Linear or Logarithmic Curve), DALI-2 T8 Enabled Dimming 1%, Lumentalk Enabled Dimming, Lutron® Hi-lume 1% EcoSystem® LDE1/PEQ1 Soft-on/Fade-to-Black, DMX/RDM Enabled Dimming 1%

Environmental**Environment**

Dry location (indoor applications only)

Operating Temperature

-4 °F to 86 °F

Ingress Protection Rating

IP20

Accessories (Order Separately)**Control Boxes**

DMX/RDM enabled (Daisy Chain or Star Configuration), Ethernet enabled (Daisy Chain or Star Configuration)

Control Systems

Pharos® Lighting Control Kit (PHAROS), Consult control systems section for details

Diagnostic and Addressing Tools

LumenID (LID)

Important**Virtual Patent Marking Notice**


This website (<https://www.lmpg.com/patents-trademarks>) is provided to satisfy the virtual patent marking provisions of applicable jurisdictions. Some products listed may be covered by additional patents not referenced here.

Fixture Dimensions


13 in

18 in


23 in

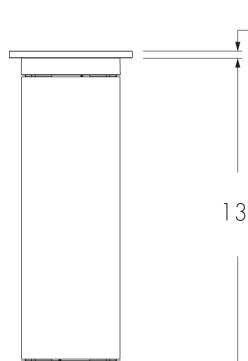


FRONT VIEW

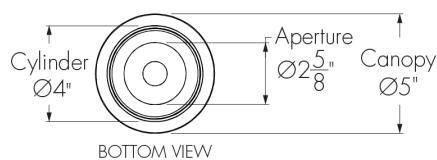


BOTTOM VIEW

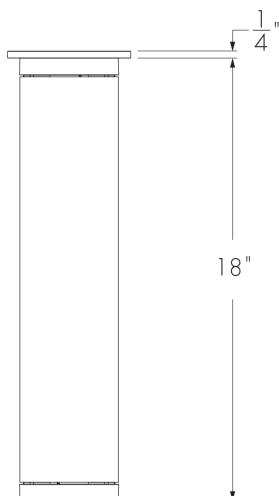


FRONT VIEW

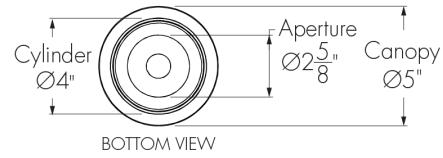

BOTTOM VIEW

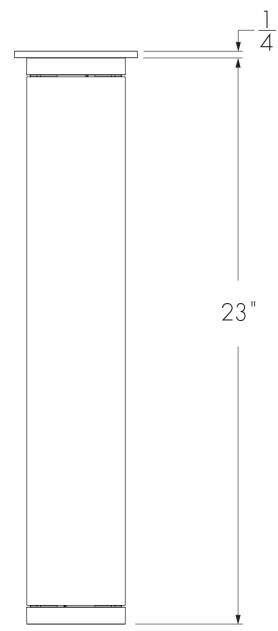



FRONT VIEW

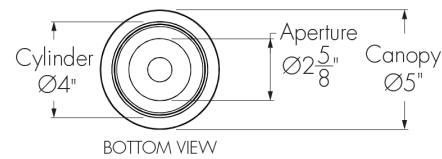


BOTTOM VIEW

Optical Accessory Dimensions (13 in Fixture Shown)

Snoot


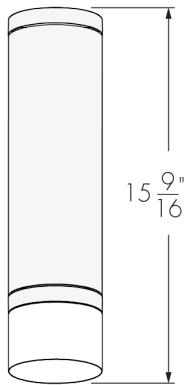


FRONT VIEW




BOTTOM VIEW

Half Snoot

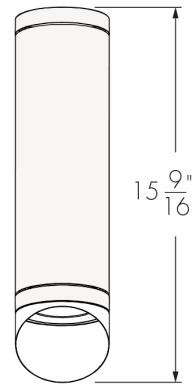

FRONT VIEW



BOTTOM VIEW

Photometric Information - Color Rendering Options Comparison, 3000K

Color sample	Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
CRI 80+	84	82	90	97	83	82	88	86	63	15	77	83	68	84	98	75
CRI 90+	94	95	98	99	95	94	97	91	80	55	93	97	83	96	99	89
CRI 95+	97	96	97	99	96	96	95	96	97	97	96	95	86	96	98	97
Radiant CRI 80+	84	83	91	96	81	82	89	83	62	15	79	80	69	85	98	76
Radiant CRI 95+	95	95	94	95	98	94	90	94	96	96	89	95	80	94	98	96

Optics

TIR Optic
XN/VN/NS/N



Semi-Specular reflector
M/W




Faceted reflector
NFR/MFR/WFR



Color and Color Temperature

Color Temperature Ranges


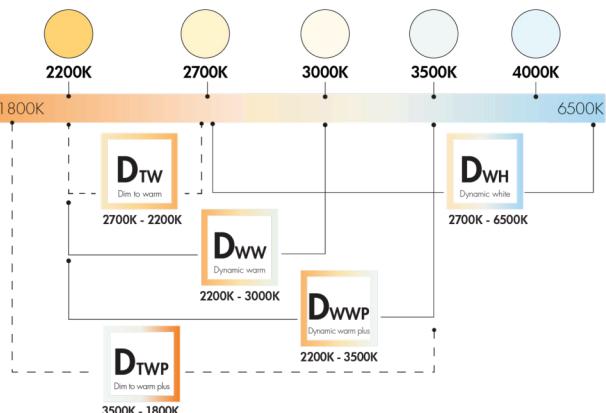


--- 1 channel (DTW, DTWP) Compatible with: DA1 SDALI lumen^{talk}

— 2 channels (DWH, DWW, DWWP) Compatible with: DALIT8 lumen^{talk}

— 3 channels* (DWH, DWW, DWWP) Compatible with: DALIT8 lumen^{talk}

* Can be field changeable via RDM & LT for individual CCT control.

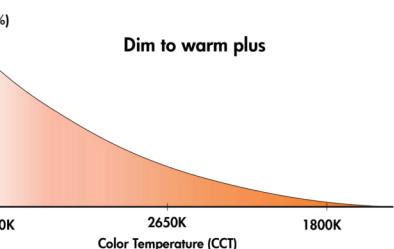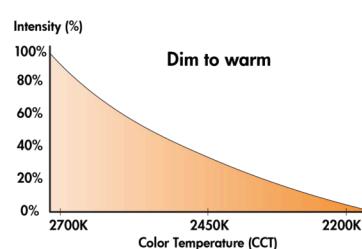

Control

On/off control

NO - On/off control

Phase dimming

PH - Phase dimming

PPH - Phase 1% dimming

Standard 0-10V dimming down to 1%

DAMC - Standard 0-10V dimming to 1% linear curve

DA1 - Standard 0-10V dimming, 1% linear

DA2 - Standard 0-10V dimming, 1% logarithmic

DA3 - Standard 0-10V dimming, 1% linear (347V)

Professional 0-10V dimming down to 0.1%

PDA1 - Pro 0-10V dimming, 0.1% linear

PDA2 - Pro 0-10V dimming, 0.1% logarithmic

Standard DALI dimming down to 1%

SDALI1 - Standard DALI dimming, 1% linear

SDALI2 - Standard DALI dimming, 1% logarithmic

Professional DALI dimming down to 0.1%

DALI1 - Pro DALI dimming, 0.1% linear

DALI2 - Pro DALI dimming, 0.1% logarithmic

DALI dimming Type 8

DALIT8 - DALI-2 dimming Type 8 (multi channel capability)

Refer to How to Order Pages and the website product configurator for exceptions.



dimming

LT - Lumentalk dimming, 1% minimum dimming value

Lutron® EcoSystem®


ES - Lutron® Hi-lume 1% EcoSystem® LDE1/PEQ1 Soft-on/Fade-to-Black
1% minimum dimming value

DMX/RDM - DMX/RDM enabled




Photometric Information - Direct Lighting Optics

XN - Extra Narrow Spot (Nominal 5°), 4000K

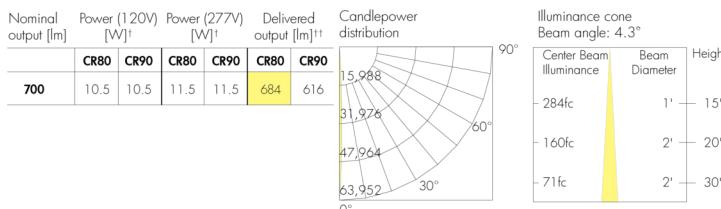


NS - Narrow Spot (Nominal 15°), 4000K

Nominal output [lm]	Power (120V) [W] [†]			Power (277V) [W] [†]			Delivered output [lm] ^{††}		
	CR80	CR90	CR95	CR80	CR90	CR95	CR80	CR90	CR95
700	7.5	7.5	8.5	9	9	10.5	969	969	872
1000	11	11	13	13	13	15	1,279	1,279	1,151
1300	13	13	18	15	15	20	1,744	1,744	1,570
2000	21	21	N/A	22	22	N/A	2,713	2,713	N/A

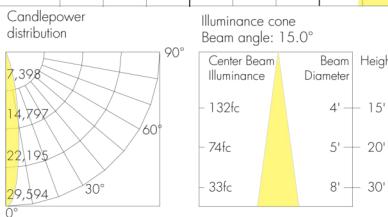

M - Medium (Nominal 40°), 4000K

Nominal output [lm]	Power (120V) [W] [†]			Power (277V) [W] [†]			Delivered output [lm] ^{††}		
	CR80	CR90	CR95	CR80	CR90	CR95	CR80	CR90	CR95
700	6.5	6.5	7	8	8	9	714	714	643
1000	8	8	11	10	10	13	943	943	849
1300	11	11	13	13	13	15	1,286	1,286	1,157
2000	18	18	21	19	19	22	2,000	2,000	1,800
3000	28	28	N/A	29	24	N/A	3,000	3,000	N/A

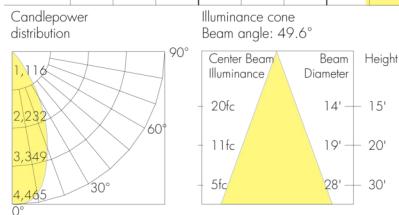


† Delivered wattage: +/- 10% tolerance. Add 3 watts per fixture when specifying Lumentalk™.

†† Consult website for latest IES files. Delivered output: +/- 10% tolerance.


Photometric performance is measured in compliance withIESNA LM-79-24.

VN - Very Narrow Spot (Nominal 10°), 4000K

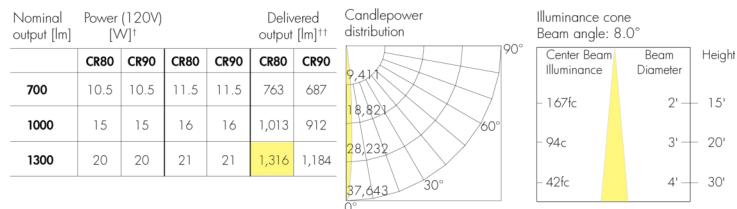


N - Narrow (Nominal 25°), 4000K

Nominal output [lm]	Power (120V) [W] [†]			Power (277V) [W] [†]			Delivered output [lm] ^{††}		
	CR80	CR90	CR95	CR80	CR90	CR95	CR80	CR90	CR95
700	6.5	6.5	7	8	8	9	698	698	628
1000	8	8	11	10	10	13	921	921	829
1300	11	11	13	13	13	15	1,256	1,256	1,130
2000	18	18	21	19	19	22	1,953	1,953	1,758

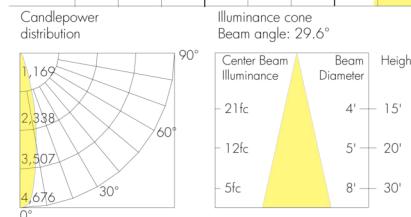


MFR - Medium Faceted Reflector (Nominal 40°), 4000K

Nominal output [lm]	Power (120V) [W] [†]			Power (277V) [W] [†]			Delivered output [lm] ^{††}		
	CR80	CR90	CR95	CR80	CR90	CR95	CR80	CR90	CR95
700	6.5	6.5	7	8	8	9	764	764	690
1000	8	8	11	10	10	13	1,009	1,009	908
1300	11	11	13	13	13	15	1,376	1,376	1,238
2000	18	18	21	19	19	22	2,140	2,140	1,926
3000	28	28	N/A	29	24	N/A	3,210	3,210	N/A

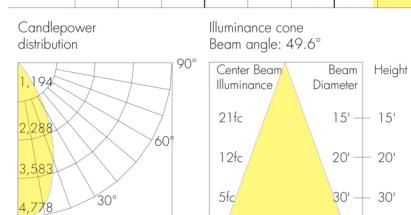


W - Wide (Nominal 60°), 4000K

Nominal output [lm]	Power (120V) [W] [†]			Power (277V) [W] [†]			Delivered output [lm] ^{††}		
	CR80	CR90	CR95	CR80	CR90	CR95	CR80	CR90	CR95
700	6.5	6.5	7	8	8	9	682	682	614
1000	8	8	11	10	10	13	900	900	810
1300	11	11	13	13	13	15	1,227	1,227	1,105
2000	18	18	21	19	19	22	1,909	1,909	1,718
3000	28	23	N/A	29	24	N/A	2,864	2,864	N/A

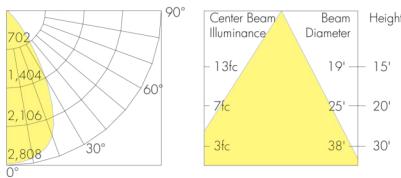Candlepower distribution
Illuminance cone
Beam angle: 64.0°

WFR - Wide Faceted Reflector (Nominal 60°), 4000K


Nominal output [lm]	Power (120V) [W] [†]			Power (277V) [W] [†]			Delivered output [lm] ^{††}		
	CR80	CR90	CR95	CR80	CR90	CR95	CR80	CR90	CR95
700	6.5	6.5	7	8	8	9	730	730	657
1000	8	8	11	10	10	13	963	963	867
1300	11	11	13	13	13	15	1,313	1,313	1,182
2000	18	18	21	19	19	22	2,043	2,043	1,838
3000	28	23	N/A	29	24	N/A	3,065	3,065	N/A

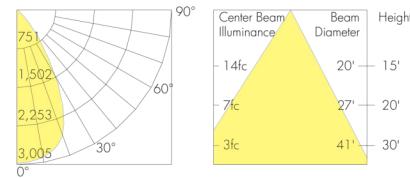Candlepower distribution
Illuminance cone
Beam angle: 64.0°


† Delivered wattage: +/- 10% tolerance. Add 3 watts per fixture when specifying Lumentalk™.

†† Consult website for latest IES files. Delivered output: +/- 10% tolerance.

Photometric performance is measured in compliance with IESNA LM-79-24.

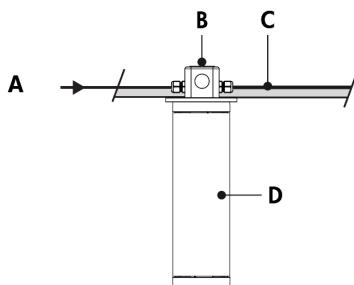Typical Wiring Diagrams (Refer to Installation Instructions for Additional Wiring Details)**On/Off Control (NO)**

A - Power input (120-277V)
B - 4 in octagonal/round junction box (by others)
C - Power wiring (by others)
D - Lumencore Cylinder Small Surface Mount


On/Off Control (NO) - Wiring Detail

A - Power input or from previous fixture
B - To fixture
C - To next fixture
D - Line
E - Ground
F - Neutral
G - Wire-nuts (by others)
H - 4 in octagonal/round junction box (by others)


Wiring Color Code

Color	USE
Green	Ground
Black	Line
White	Neutral
Red or purple	0-10V / Data +
Orange or grey	0-10V / Data -

- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Consult Photometric Information pages for wattage information.

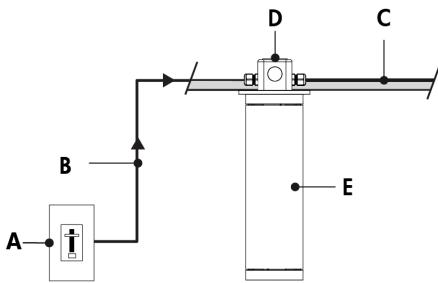Phase Dimming (PH, PPH, PPH2)

A - Third party Phase dimmer
B - Phase dimmed power circuit (120V)
C - Power wiring (by others)
D - 4 in octagonal/round junction box (by others)
E - Lumencore Cylinder Small Surface Mount

Phase Dimming (PH, PPH, PPH2) - Wiring Detail


A - Power input or from previous fixture
B - To fixture
C - To next fixture
D - Line
E - Ground
F - Neutral
G - Wire-nuts (by others)
H - 4 in octagonal/round junction box (by others)

Wiring Color Code

Color	USE
Green	Ground
Black	Line
White	Neutral
Red or purple	0-10V / Data +
Orange or grey	0-10V / Data -


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Consult Photometric Information pages for wattage information.

0-10V Dimming (DAMC, DA1, DA2, DA3, PDA1, PDA2)

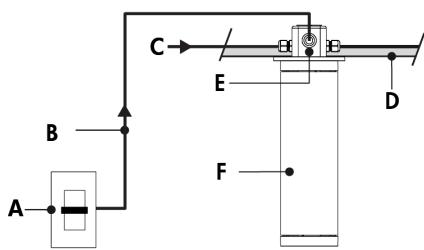

A - Dimmer (by others)
B - Data wiring (by others)
C - Power input (120-347V)
D - Power and data wiring (by others)
E - 4 in octagonal/round junction box (by others)
F - Lumencore Cylinder Small Surface Mount

0-10V Dimming (DAMC, DA1, DA2, DA3, PDA1, PDA2) - Wiring Detail




A - Power input or from previous fixture
B - To fixture
C - 0-10V +
D - 0-10V -
E - To next fixture
F - Line
G - Ground
H - Neutral
I - Wire-nuts (by others)
J - From dimmer (by others)
K - 4 in octagonal/round junction box (by others)

Wiring Color Code

Color	USE
Green	Ground
Black	Line
White	Neutral
Red or purple	0-10V / Data +
Orange or grey	0-10V / Data -


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Consult Photometric Information pages for wattage information.

Lumentalk (LT)

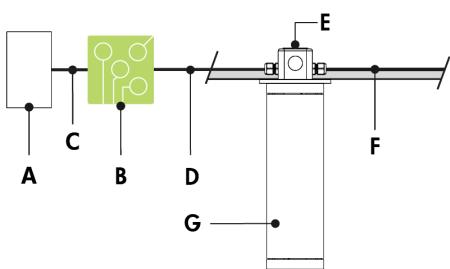

A - Dimmer/controller (by others)
B - Lumentranslator 2 (LTL2-DIM, -DMX, -TRIAC, -DALI)
C - Data wiring (by others)
D - Power line (120-277V AC)
E - 4 in octagonal/round junction box (by others)
F - Power wiring (by others)
G - Lumencore Cylinder Small Surface Mount

Lumentalk (LT) - Wiring Detail



A - Power input (control over power line via Lumentalk system) or from previous fixture
B - To fixture
C - To next fixture
D - Line
E - Ground
F - Neutral
G - Wire-nuts (by others)
H - 4 in octagonal/round junction box (by others)


Wiring Color Code

Color	USE
Green	Ground
Black	Line
White	Neutral
Red or purple	0-10V / Data +
Orange or grey	0-10V / Data -

- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Lumentalk enabled fixtures must be commissioned using LumentalkID software and a LID-LT. Consult factory for details.
- Maximum of 1 transmitter (Lumentranslator 2 or Lumenlink) per system. No third party fixtures allowed on the same circuit.
- For DMX applications: 1 DMX controller per Lumentalk network, maximum of 48 DMX channels per Lumentalk network (minimum step transition update rate is 1 second, minimum fade time between two colors is 1 minute). Consult factory for DALI Lumentalk applications. Consult factory for applications that require additional capabilities.
- Consult Photometric Information pages for wattage information.

Optical Accessories**SN - Snoot**

LACYS - SN

XLVR - Concentric Ring Louver



LACYS - XLVR

PD - Prismatic Diffuser



LACYS - PD

DR - Decorative Ring

LACYS - DR

Control Boxes (Order Separately)**CBX-DMX/RDM - DMX/RDM Enabled (Daisy Chain or Star Configuration)**


DMX/RDM control box. Up to six power and data outputs to fixtures or fixture runs. Consult CBX specification sheet and installation instructions for details. Lumenterminators provided with CBX (2x for Daisy Chain configuration, 6x for Star configuration), consult factory to order spares.

CBX-ENET - Ethernet Enabled (Daisy Chain or Star Configuration)

Ethernet control box. Up to four power and data outputs to fixture or fixture runs. Consult Ethernet CBX specification sheet and installation instructions for details.

Control Systems (Order Separately)

PHAROS - Pharo® Designer Lighting Control Kit

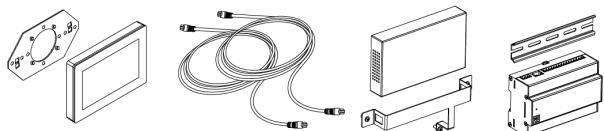

The Pharos Designer Lighting Control Kit, available for 1 or 2 DMX universes, allows for complete control of large lighting installations.

Diagnostic And Addressing Tools (Order Separately)

LID - LumenID



The updated LumenID (LID) is now your all-in-one diagnostic and addressing solution for both DMX/RDM and Lumentalk (LT) systems. Engineered for versatility, it streamlines commissioning and troubleshooting across protocols—no need for multiple tools. Consult the LID specification sheet for full details.

How to Order

Housing ⁽¹⁾	Certification	Mounting	Light Direction	Voltage	Length	Direct Lighting Output (Nominal Lumens)	Direct Lighting Color Temperature	Direct Lighting Color Rendering	Direct Lighting Optics (Nominal Distribution)
LACYS Lumencore Cylinder Small - Ø4 in	A UL/cUL	SM Surface Mount	D Direct lighting	120 120 Volts 277 277 Volts 347 347 Volts ⁽²⁾ ⁽³⁾	13 13 in 18 18 in 23 23 in	DL07 700lm DL10 1000lm ⁽⁴⁾ DL13 1300lm ⁽⁴⁾ DL20 2000lm ⁽⁵⁾ DL30 3000lm ⁽⁶⁾	22K 2200K ⁽³⁾ ⁽⁷⁾ 27K 2700K 30K 3000K 35K 3500K 40K 4000K DTW Dim to Warm (2700K to 2200K) ⁽⁸⁾ ⁽⁹⁾ ⁽¹⁰⁾ DTWP Dim to Warm Plus (3500K to 1800K) ⁽⁸⁾ ⁽⁹⁾ ⁽¹⁰⁾ DWH Dynamic White (2700K to 6500K) ⁽⁹⁾ ⁽¹⁰⁾ ⁽¹¹⁾ DWW Dynamic Warm White (2200K to 3000K) ⁽⁹⁾ ⁽¹⁰⁾ ⁽¹¹⁾ DWWP Dynamic Warm White Plus (2200K to 3500K) ⁽⁹⁾ ⁽¹⁰⁾ ⁽¹¹⁾	CR80 CRI 80+ ⁽¹²⁾ CR90 CRI 90+ CR95 CRI 95+ RCR80 Radiant CRI 80+ ⁽³⁾ ⁽¹³⁾ RCR95 Radiant CRI 95+ ⁽³⁾ ⁽¹³⁾	XN Extra Narrow Spot 5° ⁽¹⁴⁾ VN Very Narrow Spot 10° ⁽¹⁵⁾ NS Narrow Spot 15° ⁽¹⁶⁾ N Narrow 25° ⁽¹⁶⁾ NFR Narrow Faceted Reflector 25° M Medium 40° MFR Medium Faceted Reflector 40° W Wide 60° WFR Wide Faceted Reflector 60° WW True Asymmetric Wallwash ⁽¹⁷⁾ ⁽¹⁸⁾ DAS Double Asymmetric ⁽¹⁷⁾ ⁽¹⁹⁾

Notes:

1. Refer to website product configurator for all exceptions.
2. Not available for 700 lumens.
3. Not available for XN and VN optics.
4. Available for VN, NS, N, NFR, M, MFR, W, WFR, WW and DAS optics only.
5. Available for NS, N, NFR, M, MFR, W, WFR and WW optics only.
6. Available for NFR, M, MFR, W and WFR optics only.
7. Available for CR80 only.
8. Available for 1000 and 1300 lumens when combined with CR90 and NFR, M, MFR, W or WFR optics only.
9. NFR, MFR and WFR faceted reflector optics are recommended for optimal performance.
10. Not available for WW or DAS optics.
11. Available for 1300 lumens when combined with CR80 and NFR, M, MFR, W or WFR optics only.
12. Available for 2200K, 2700K, 3000K, 3500K, 4000K and DWH, DWW or DWWP color options only.
13. Radiant CRI options available for 3000K only.
14. Available for 700 lumens when combined with CR80 or CR90 color rendering options only.
15. Available for 700, 1000 and 1300 lumens when combined with CR80 or CR90 color rendering options only.
16. Available up to 2000 lumens.
17. Optical accessories are not available for WW or DAS optics.
18. The color of the true asymmetric wallwash baffle matches the fixture bezel.
19. The color of the double asymmetric baffle is metallic gray.

How to Order

Direct Lighting Control ⁽²⁰⁾	Direct Lighting Accessories ^{(17) (43)} (44)	Finish	Bezel	Bezel Finish
NO On/Off Control ^{(21) (22) (23)}	NA No Accessory	MWH Matte White	b Bezel	MWH Matte White
PH Phase Dimming ^{(22) (23) (24) (25)}	SN Snoot ⁽⁴⁵⁾	MBK Matte Black		MBK Matte Black
PPH Phase Dimming 1% ^{(3) (23) (25) (26)}	HSN Half Snoot ⁽⁴⁵⁾	MBR Matte Brown		MBR Matte Brown
DAMC Standard 0-10V Dimming 1% Linear Curve ^{(23) (27) (28) (29) (30)}	HL Honeycomb Louver ⁽⁴⁶⁾	MOR Matte Orange		MOR Matte Orange
DA1 Standard 0-10V Dimming 1% Linear Curve ^{(22) (31) (32)}	XLVR Concentric Ring Louver ⁽⁴⁷⁾	MGR Matte Green		MGR Matte Green
DA2 Standard 1-10V Dimming 1% Logarithmic Curve ^{(22) (31) (32)}	CL Clear Glass Lens	MLB Matte Blue		MLB Matte Blue
DA3 Standard 0-10V Dimming 1% Linear Curve ^{(347V) (22) (32)}	SL Softening Glass Lens	MSI Matte Silver		MSI Matte Silver
PDA1 Professional 0-10V Dimming 0.1% Linear Curve ^{(22) (23) (31)}	PD Prismatic Diffuser ⁽⁴⁸⁾	GBK Glossy Black		GBK Glossy Black
PDA2 Professional 0-10V Dimming 0.1% Logarithmic Curve ^{(22) (23) (31)}	LSN Linear Spread Lens Narrow ^{(1° x 40°) (49) (50)}	GYL Glossy Yellow		GYL Glossy Yellow
SDALI1 Standard DALI Dimming 1% Linear Curve ^{(29) (33)}	LSW Linear Spread Lens Wide ^{(1° x 60°) (50) (51)}	GLR Glossy Red		GLR Glossy Red
SDALI2 Standard DALI Dimming 1% Logarithmic Curve ^{(29) (33)}	DR Decorative Ring ⁽⁵²⁾	GVI Glossy Violet		GVI Glossy Violet
DALI1 Professional DALI Dimming 0.1% Linear Curve ^{(22) (23) (34)}		GGR Glossy Green		GGR Glossy Green
DALI2 Professional DALI Dimming 0.1% Logarithmic Curve ^{(22) (23) (34)}		GIY Glossy Ivory		GIY Glossy Ivory
DALIT8 DALI-2 T8 Enabled Dimming 1% ^{(35) (36)}		CGY Concrete Grey		CGY Concrete Grey
ES Lutron® Hi-lume 1% EcoSystem® LDE/PEQ1 Soft-on/Fade-to-Black ^{(3) (23) (37) (38)}		MLG Metalized Grey		MLG Metalized Grey
LT Lumentalk Enabled Dimming ^{(39) (40)}		IBR Italian Brick Red		IBR Italian Brick Red
DMX/RDM DMX/RDM Enabled Dimming 1% ^{(39) (41) (42)}		PWH Parget White		PWH Parget White
		CC Custom Color & Finish ⁽⁵³⁾		CC Custom Color & Finish ⁽⁵³⁾

Notes:

3. Not available for XN and VN optics.

17. Optical accessories are not available for WW or DAS optics.

20. Control options vary according to color temperature, color rendering and optics combination. Refer to website product configurator for details.

21. Manufacturer's choice driver. Order code may change to NO1.

22. Available up to 1300 lumens (CR80, RCR80, CR90, CR95 or RCR95) and 2000 lumens (CR80, RCR80 or CR90) for NS and WW optics. Available up to 1300 lumens (CR80, RCR80, CR90, CR95 or RCR95) for DAS optic. Available up to 2000 lumens (CR80, RCR80, CR90, CR95 or RCR95) for N optic and up to 3000 lumens (CR80, RCR80 or CR90) for NFR, M, MFR, W and WFR optics.

23. Not available for DTW, DTWP, DWH, DWW or DWWP color options.

24. Manufacturer's choice driver. Order code may change to PHT or PH2.

25. Available for 120V voltage option only.

26. Manufacturer's choice driver. Order code is subject to change.

27. Manufacturer's choice driver. Order code may change to DAMC1 or DAMC2.

28. Not available for XN and VN optics.

29. Not available with 347V.

30. Available up to 2000 lumens when combined with CR90 or CR95 color rendering options.

31. Driver cuts off power to the fixture when the control signal drops below 0.5V.

32. Not available for DWH, DWW or DWWP color options.

33. Available for DTW and DTWP color options only, when combined with 1000 or 1300 lumens.

34. Consult factory for other DALI control options for static color temperatures.

35. Available for DWH, DWW and DWWP color options only. DALI-2 Type 8 controller required.

36. Consult factory for DALIT8 control option.

37. One EcoSystem® address per fixture. 1% minimum dimming value. Lutron® EcoSystem® Enabled dimming not available for 700 lumens or 1000 lumens.

38. Not available for 3000 lumens.

39. Available up to 1300 lumens (CR80, RCR80, CR90, CR95 or RCR95) and 2000 lumens (CR80, RCR80 or CR90) for NS and WW optics. Available up to 1300 lumens (CR80, RCR80, CR90, CR95 or RCR95) for DAS optic. Available up to 2000 lumens (CR80, RCR80, CR90, CR95 or RCR95) for N, NFR, M, MFR, W and WFR optics.

40. A Lumentranslator 2 (LTL2) and LumenID (LID) must be specified for Lumentalk applications. Consult Lumentranslator 2 and Lumentalk pages and specification sheets for details.

41. A Control Box (CBX-DS or CBX-ST) and LumenID (LID) must be specified.

42. Configurable to 1, 2, or 3 channel control via RDM in the field.

43. Accessories specified in the fixture code are factory installed but can also be changed in the field. Refer to installation instructions for details. To order accessories separately, refer to the Optical Accessories section of the specification sheet.

44. Maximum of two lenses can be installed per fixture. The Snoot (SN) or Half Snoot (HSN) can be combined with any accessory. The Clear Glass Lens (GL) and Softening Glass Lens (SL) cannot be combined together. The Linear Spread Lenses (LSN and LSW) are compatible with the Snoot and Half Snoot accessories only.

45. Matte black interior surface, exterior finish matches housing color.

46. When combined with another accessory, the HL will be factory-installed in second position (furthest from the LED source).

47. Available for XN, VN and NS optics only.

48. Can be combined with HL accessory for 2200K, 2700K, 3000K, 3500K and 4000K color options only.

49. Nominal 10° x 40° distribution when used with the NS optic.

50. Available for XN, VN, NS, N and NFR optics when combined with 2200K, 2700K, 3000K, 3500K, 4000K color options only.

Available for NFR optic only when combined with DTW, DTWP, DWH, DWW or DWWP color options only.

51. Nominal 10° x 60° distribution when used with the NS optic.

52. No other accessories can be combined with the decorative ring accessory. A decorative ring replaces the bezel on a fixture. Do not specify a bezel finish.

53. Longer lead times can be expected for custom RAL color finishes.