
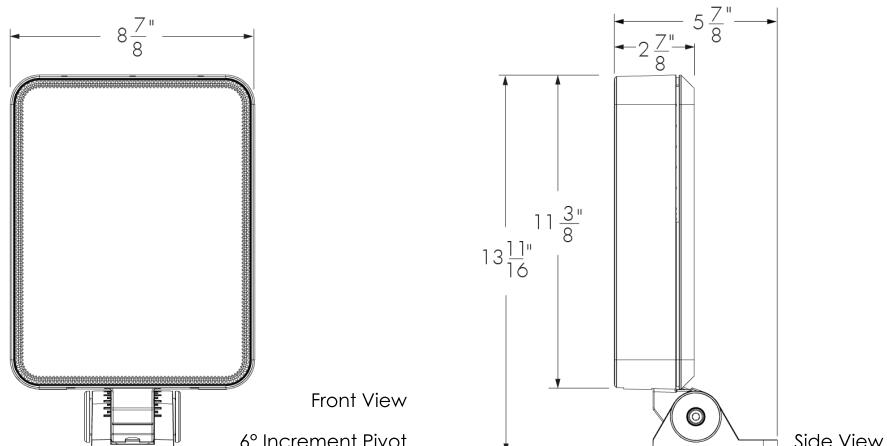


Project Name _____

Qty _____

Type _____

Catalog / Part Number _____



Photometric Summary (Discrete RGBW40K)

Symmetric

	Delivered output (lm)	Intensity (peak cd)
VN (6°)	2,642	137,663
NS (10°)	2,829	100,343
NF (20°)	2,795	26,212
M (30°)	2,555	11,552
FL (40°)	2,409	5,948
WFL (60°)	1,999	2,075

1. Based on RGBW40K full output.

2. Photometric performance is measured in compliance with IESNA LM-79-24.

3. Refer to the [Lumenquad Color Changing Photometric Guide](#) on Lumenpulse website for information on other color temperatures.

Photometric Summary (Opticolor+ MRGBWP)

Symmetric

	Delivered output (lm)	Intensity (peak cd)
NS (10°)	2,505	47,745
NF (20°)	2,370	15,378
M (30°)	2,322	8,565
FL (40°)	2,360	6,373
WFL (60°)	2,294	2,345
VWFL (90°)	2,089	1,064

1. Based on MRGBWP full output, white set to 3000K.

2. Photometric performance is measured in compliance with IESNA LM-79-24.

3. Refer to the [Lumenquad Color Changing Photometric Guide](#) on Lumenpulse website for information on other color temperatures.

Description

The Lumenquad Large Color Changing has a sleek 3 in profile with no visible wiring or hardware and seamlessly integrates with any architecture while also applying dynamic colour. Lumenpulse's LED boards possess an optimised candela and lumens recipe for both Narrow and Wide optics. The Lumenquad Large Color Changing is the epitome of versatility and can be configured with numerous optical, color mixing choices, mounting options, accessories, controls, and multiple standard finishes.

Features

Colors and Color Temperature (Discrete)

RGBA: Discrete Red, Green, Blue, Amber

RGBW30K: Discrete Red, Green, Blue, White 30K

RGBW40K: Discrete Red, Green, Blue, White 40K

RGB: Discrete Red, Green, Blue

Colors and Color Temperature (Opticolor+™)

MRGBA: Opticolor™ Mix-at-Source Red, Green, Blue, PC Amber

Colors and Color Temperature (Opticolor+™)

MRGBWP: Opticolor+™ Mix-at-Source Red, Green, Blue Plus White Settable Range 24K to 65K

MRGBWP Typical Color Rendering:

2700K-5000K: 90+ CRI

2500K-6500K: 80+ CRI

MRGRBWP: Opticolor+™ Mix-at-Source Red, Green, Royal Blue Plus White Settable Range 24K to 65K

Optics (Nominal Distribution)

VN: VN (6°)

NS: NS (10°)

NF: NF (20°)

M: M (30°)

FL: FL (40°)

WFL: WFL (60°)

VWFL: VWFL (90°)

NAS: NAS (Narrow Asymmetric)

WW: WW (Asymmetric Wallwash)

Photometric Summary (Opticolor MRGBA)

Symmetric


	Delivered output (lm)	Intensity (peak cd)
NS (10°)	2,465	46,981
NF (20°)	2,332	15,132
M (30°)	2,284	8,428
FL (40°)	2,322	6,271
WFL (60°)	2,257	2,308
WWFL(90°)	2,056	1,047

1. Based on MRGBA full output.

2. Photometric performance is measured in compliance with IESNA LM-79-24.

3. Refer to the [Lumenquad Color Changing Photometric Guide](#) on Lumenpulse website for information on other color temperatures.

Optic

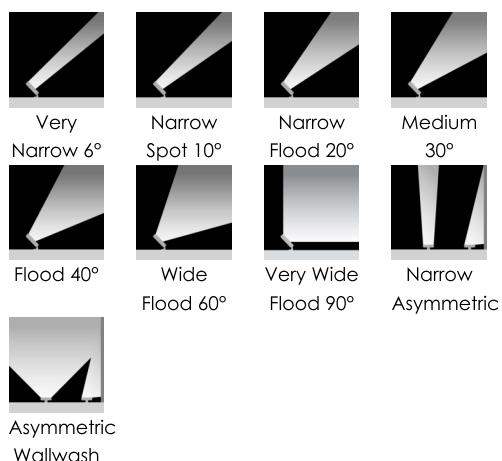

Mounting Options

SM: Surface Mount

WM: Wall Mount Bracket with Decorative Cover

WMNC: Wall Mount Bracket without Decorative Cover

RJBOX: Recessed JBOX Wall Mount with Decorative Cover

RJBOXNC: Recessed JBOX Wall Mount Without Decorative Cover

PM: Pole Mount

TN: Tenon Mount

SK: Stake Mount

NOTE: All mounting options have a pivot adjustable in 6° increments, consult factory for universal pivot option.

Optical Options (Factory Installed)

LSL: Linear Spread Lens Horizontal Distribution

LSV: Linear Spread Lens Vertical Distribution

HL: Honeycomb Louver

Option

CRC: Corrosion-Resistant Coating for Hostile Environments

Power Consumption

50 W

Warranty

5-year limited warranty

Performance

Maximum Delivered Output (Discrete)

2,931 lm (RGB full output, NAS @ 2.5°, DMX/RDM)

2,880 lm (RGBW30K full output, NAS @ 2.5°, DMX/RDM)

2,939 lm (RGBW40K full output, NAS @ 2.5°, DMX/RDM)

2,401 lm (RGBA full output, NAS @ 2.5°, DMX/RDM)

Maximum Delivered Output (Opticolor)

2,465 lm (MRGBA full output, NS 10°, DMX/RDM)

Maximum Delivered Output (Opticolor+)

2,505 lm (MRGBWP full output, NS 10°, DMX/RDM)

Maximum Delivered Intensity (Discrete)

137,268 cd at nadir (RGB full output, VN 6°, DMX/RDM)

134,910 cd at nadir (RGBW30K full output, VN 6°, DMX/RDM)

137,663 cd at nadir (RGBW40K full output, VN 6°, DMX/RDM)

112,471 cd at nadir (RGBA full output, VN 6°, DMX/RDM)

Maximum Delivered Intensity (Opticolor)

46,981 cd at nadir (MRGBA full output, NS 10°, DMX/RDM)

Maximum Delivered Intensity (Opticolor+)

47,745 cd at nadir (MRGBWP full output, NS 10°, DMX/RDM)

Illuminance at Distance (Discrete)

Minimum 1 fc at 372 ft (RGB full output, VN 6°, DMX/RDM)

Minimum 1 fc at 369 ft (RGBW30K full output, VN 6°, DMX/RDM)

Minimum 1 fc at 373 ft (RGBW40K full output, VN 6°, DMX/RDM)

Minimum 1 fc at 337 ft (RGBA full output, VN 6°, DMX/RDM)

Illuminance at Distance (Opticolor)

Minimum 1 fc at 217 ft (MRGBA full output, NS 10°, DMX/RDM)

Illuminance at Distance (Opticolor+)

Minimum 1 fc at 219 ft (MRGBWP full output, NS 10°, DMX/RDM)

Lumen Maintenance

L70 (15K) > 90,000 hrs Ta 25 °C (TM-21 reported)

L70 > 150,000 hrs Ta 25 °C (projected)*

L90 (15K) = 55,400 hrs Ta 25 °C (TM-21 reported)

L90 = 55,400 hrs Ta 25 °C (projected)*

*Estimated based on in-situ case temperature and LM-80 report

Color and Color Temperature

Opticolor+™
Mix-at-Source
Red, Green,
Blue Plus White
Settable
Range 24K to
65K



Discrete Red,
Green, Blue,
White 30K



Opticolor+™
Mix-at-Source
Red, Green,
Royal Blue Plus
White Settable
Range 24K to
65K

Control

DMX/RDM

DALI
T8

Ratings

IP66 IK10

Certifications**Physical**

Housing Material	Low copper content high pressure die-cast aluminum
Lens Material	Clear tempered glass
Hardware Material	Stainless steel
Gasket Material	Silicone
Surface Finish	Electrostatically applied polyester powder coat
Weight	15 lbs
EPA	Front = 0.84 ft ² , Side = 0.23 ft ² , Front 45°= 0.79 ft ²

Electrical and Control

Voltage	100 to 277 volts
Fixture Cable	Power and data in one cable
Conductors	3C #16-3 (LT control) 6C #14-3/ #24-3 (DMX/RDM control)
Control	Lumentalk, DMX/RDM Enabled, DALI 2 T8 Enabled Dimming 0.1%
Resolution (DMX/RDM)	Per fixture, 8-bit or 16-bit, 3 channels (RGB) or 4 channels (RGBW30K, RGBW40K, RGBA, MRGA, MRGBWP and MRGRBWP)

Environmental

Storage Temperature	-40 °F to 185 °F (device must reach start-up temperature value before operating)
Start-up Temperature	-13 °F to 122 °F
Operating Temperature	-40 °F to 122 °F
Ingress Protection Rating	IP66 Wet location rated
Impact Resistance Rating	IK10
Application Wind Speed	Luminaires were designed based on AASHTO 2013 standard to ensure highest quality and safety. Installation should be validated by a local project engineer to ensure the luminaires are suitable for the wind speed and exposure of the specific application

Accessories (Order Separately)

Optical Accessories	Snoot, Lumenquad Large Visor, Linear Spread Lens Adjustable, Wire Guard
Control Boxes	DMX/RDM enabled (Daisy Chain or Star Configuration), Ethernet enabled (Daisy Chain or Star Configuration)
Control Systems	Pharos® Designer Lighting Control Kit (PHAROS), Pharos® Expert Control Kit (EXPERT)
Diagnostic and Addressing Tools	LumenID (LID)


Important

Virtual Patent Marking Notice

This website (<https://www.lmpg.com/patents-trademarks>) is provided to satisfy the virtual patent marking provisions of applicable jurisdictions. Some products listed may be covered by additional patents not referenced here.

Color Point Information

MRGBWP

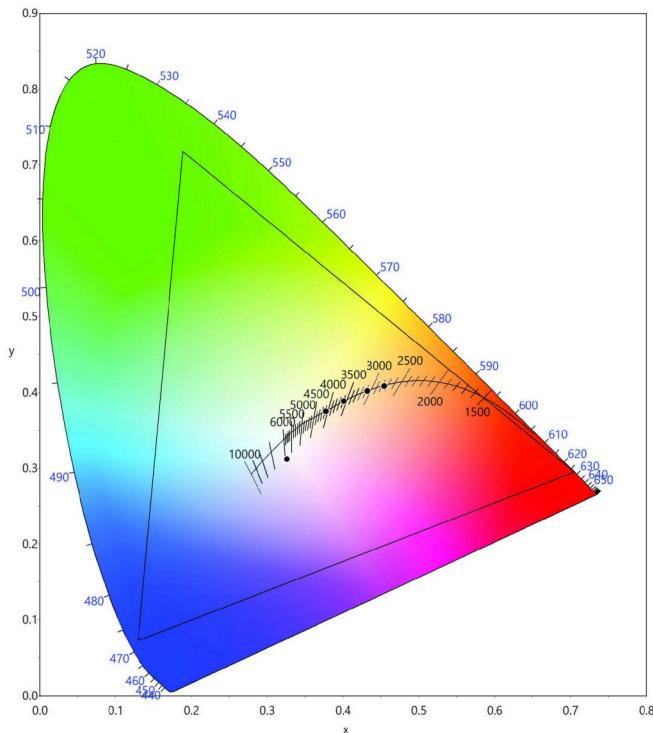

Dominant Wavelength and Chromaticity


	Dominant Wavelength	Chromaticity	
		Cx	Cy
Red	~628nm	0.7050	0.2949
Green	~531nm	0.1885	0.7178
Blue	~471nm	0.1298	0.0726
Amber	~591nm	0.5755	0.4126

	Cx	Cy
MRGBWP Full On	0.3261	0.3121
27K Optidrive	0.4545	0.4081
30K Optidrive	0.4318	0.4017
35K Optidrive	0.4010	0.3883
40K Optidrive	0.3773	0.3747


Values measured from Steady State Full on Optidrive @ 25°C ambient conditions.

Mounting Options


SM - Surface Mount

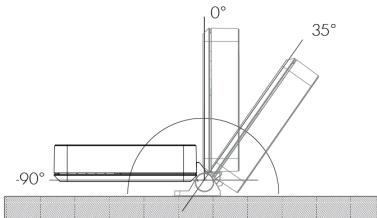


SM - Mounting Hole Pattern

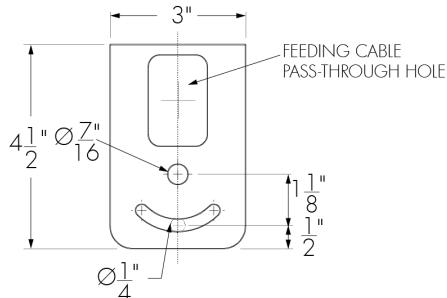

The SM mounting option cannot be interchanged with any other mounting option. All others mountings are interchangeable. Consult factory for details.

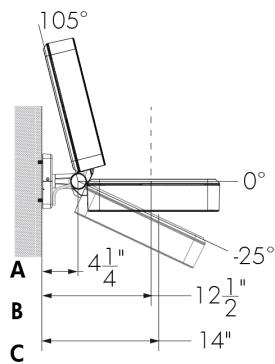
WM - Wall Mount Bracket with Decorative Cover

WAM - Wall Mount Bracket With Decorative Cover
 6 in, 12 in, 18 in or 24 in

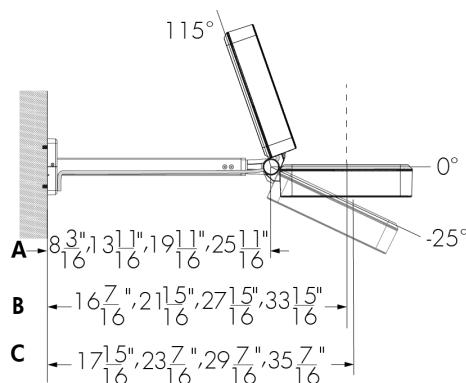


A cable length of 10 ft or greater must be specified for the WAM24 mounting option.

WMRJB - Recessed JBOX Wall Mount With Decorative Cover

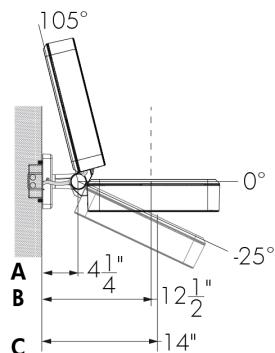


Fixture cable length is determined by Lumenpulse.

WMNC - Wall Mount Bracket Without Decorative Cover

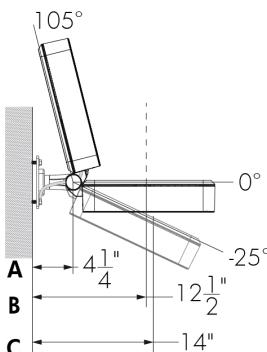


WAMNC - Wall Mount Bracket Without Decorative Cover
 6 in, 12 in, 18 in or 24 in

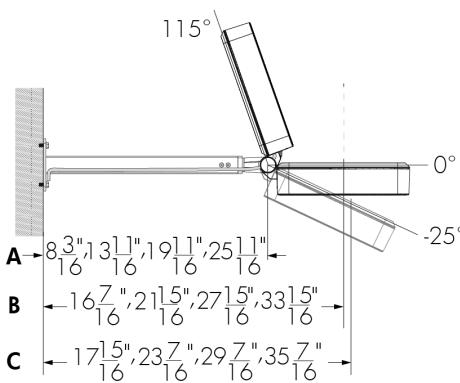

A cable length of 10 ft or greater must be specified for the WAM24 mounting option.

WMRJBNC - Recessed JBOX Wall Mount Without Decorative Cover

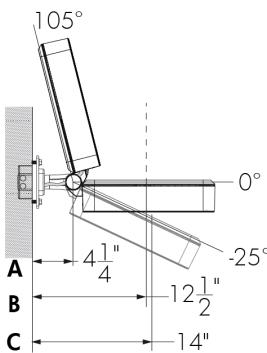


Fixture cable length is determined by Lumenpulse.

A - Dimension from wall to pivot.


B - Dimension from wall to the geometric center of the fixture.

C - Dimension from wall to the center of the board.


WAMRJB - Recessed JBOX Wall Arm Mount With Decorative Cover 6 in, 12 in, 18 in or 24 in

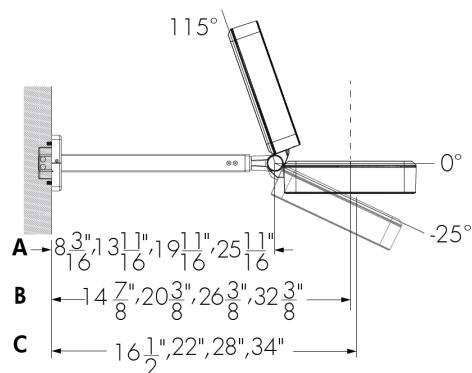

Wall Mount Horizontal Pivot Limits

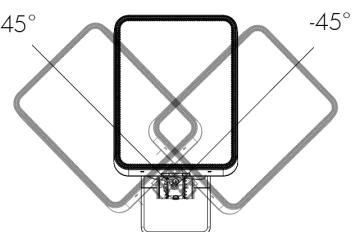

WAMRJBNC - Recessed JBOX Wall Arm Mount Without Decorative Cover 6 in, 12 in, 18 in or 24 in

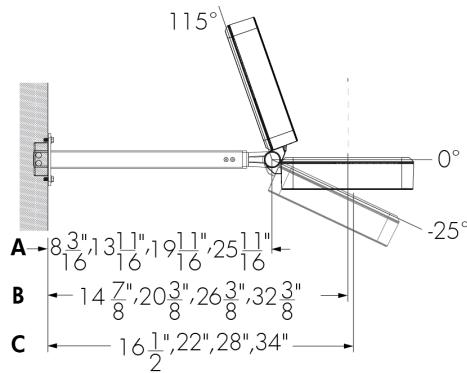


A - Dimension from wall to pivot.


B - Dimension from wall to the geometric center of the fixture.

C - Dimension from wall to the center of the board.


WM, WAM, WMRJB and WAMRJB - Mounting Hole Pattern

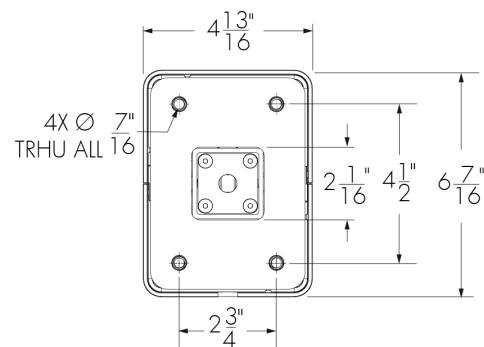

WMNC, WAMNC, WMRJBNC and WAMRJBNC - Mounting Hole Pattern

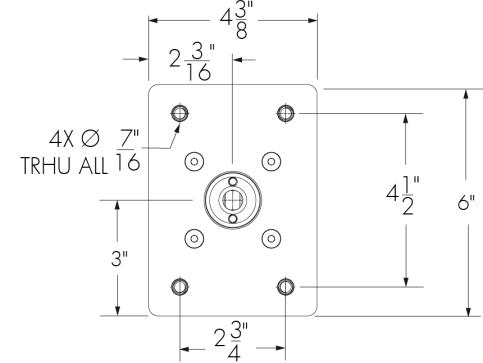


RPM4/1, RPM4.5/1, RPM5/1 - Round Pole Mount

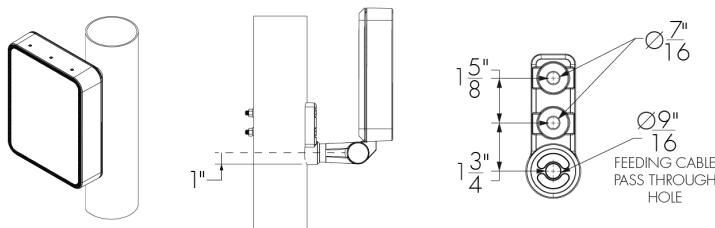


	RPM4/1	RPM4.5/1	RPM5/1
For pole Ø	$4" \pm \frac{1}{16}$	$4.5" \pm \frac{1}{16}$	$5" \pm \frac{1}{16}$
Bolt length	$5\frac{1}{4}$	$5\frac{3}{4}$	$6\frac{1}{4}$

Consult factory for other pole diameters.
 Hardware included with accessory.

Round Pole Mount Horizontal Pivot Limits

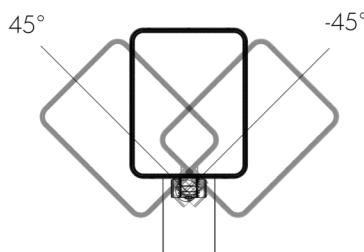

PLTU - Universal Yoke

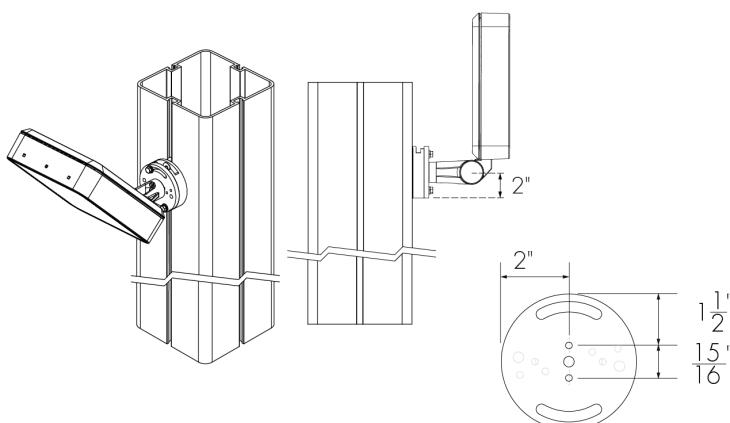


Refer to the Universal Yoke specification sheet and Pole installation instructions for more details. Square Lumentech profile shown.

All mounting options (except for SM mounting) are interchangeable. Consult factory for details.

All mounting options have a pivot adjustable in 6° increments, consult factory for universal pivot option.


RPM4/2, RPM4.5/2, RPM5/2 - Round Pole Mount For Two Fixtures

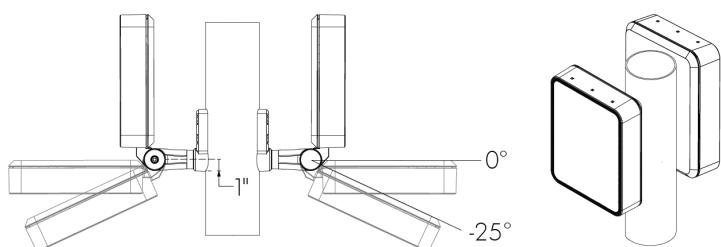

	RPM4/2	RPM4.5/2	RPM5/2
For pole Ø	$4" \pm \frac{1}{16}$	$4.5" \pm \frac{1}{16}$	$5" \pm \frac{1}{16}$
Bolt length	$5\frac{3}{4}$	$6\frac{1}{4}$	7"


Consult factory for other pole diameters.
 Hardware included with accessory.

TN2 - Tenon Adapter For 2 3/8 in O.D. Pole

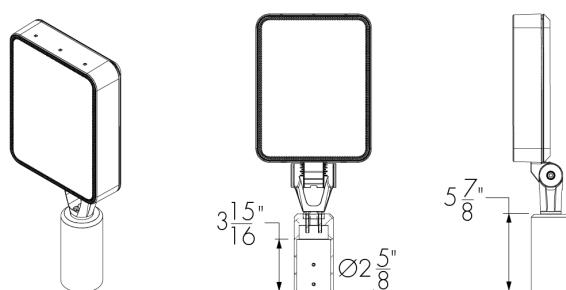


Vertical mounting only. Consult factory for horizontal mounting.

TN4 - Tenon Adapter For 4 in O.D. Pole

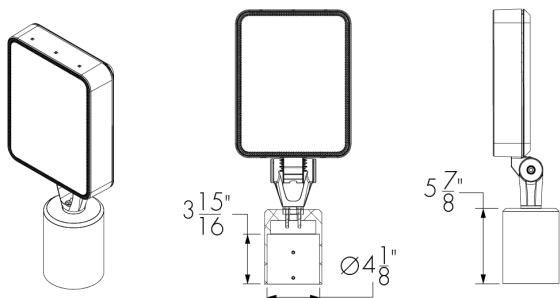

Vertical mounting only. Consult factory for horizontal mounting.

SK - Stake Mount




All mounting options (except for SM mounting) are interchangeable. Consult factory for details.

All mounting options have a pivot adjustable in 6° increments, consult factory for universal pivot option.


Optical Options – Discrete

LSLH - Linear Spread Lens Horizontal Distribution

LSLV - Linear Spread Lens Vertical Distribution



LSLH



LSLV

Factory installed, not adjustable on site. Not available for WFL, VWFL, NAS and WW optics.


See 'Optical Accessories' section for field adjustable spread lens (LSLA).

Beam angle with LSLH/LSLV	
VN	7° x 60°
NS	13° x 60°
NF	18° x 65°
M	25° x 66°
FL	35° x 70°


LLF: 0.88*

*LLF may vary slightly by distribution chosen.

HL - Honeycomb Louver



RGB

RGBW
RGBA

Factory installed, not adjustable on site. HL not available for WFL, VWFL, NAS and WW optics.

The addition of a honeycomb louver will affect beam distribution. Consult factory for application support.


LLF: 0.90*

*LLF may vary slightly by distribution chosen.


Optical Options - Opticolor™ and Opticolor+

LSLH - Linear Spread Lens Horizontal Distribution

LSLV - Linear Spread Lens Vertical Distribution



LSLH



LSLV

Factory installed, not adjustable on site. Not available for WFL, VWFL, NAS and WW optics.

See 'Optical Accessories' section for field adjustable spread lens (LSLA).

Optic installed in fixture	Beam angle with LSLH/LSLV
NS	11° x 61°
NF	19° x 66°
M	26° x 70°
FL	31° x 71°


LLF: 0.88*

*LLF may vary slightly by distribution chosen.

Optical Accessories (Factory Installed, Order Separately)

Installed optical accessories will affect the maximum pivot limits for each mounting option, consult factory for details.


SN - Snoot

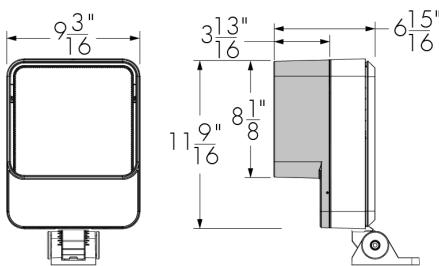

LQLSN-FINISH-BK-OPTIONS (CRC)

Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

VS - Visor

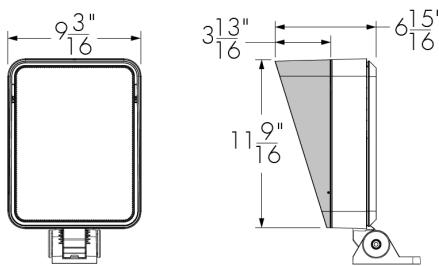


LQLVS-FINISH-BK-OPTIONS (CRC)

Interior surface painted black. Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

The Visor is not recommended for the WW optic.


LSLA - Linear Spread Lens Adjustable

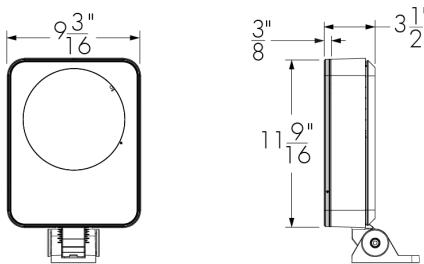

LQLSLA-FINISH-OPTIONS (CRC)

Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

WG - Wire Guard

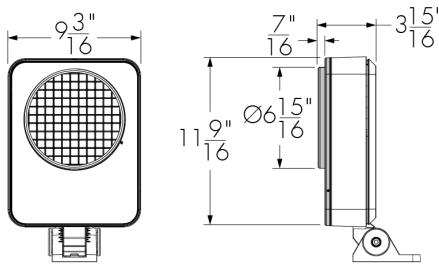


LQLWG-FINISH-OPTIONS (CRC)

Please specify the exterior **FINISH** from the list of finishes in the fixture order code.


Accessory Combinations

+	Snoot	Visor	Wire guard
Linear spread lens adjustable	YES	YES	NO
Wire guard	YES	YES	N/A

Accessory combinations must be ordered together on a single line. Ex: A snoot + wire guard combination order code is LQLSNWG-BK-BK. A maximum of two accessories can be combined per fixture.

Diffuser Lenses (Intended for Mockup Purposes Only, Order Separately)**Diffuser Lens 1 (1 Notch)**

147707

Diffuser Lens 4 (4 Notches)

147710

Final Distribution Using Diffuser Lenses

Original Distribution on Fixture	Final Distribution Using Diffuser Lens					
	Diffuser Lens 1 1 Notch	Diffuser Lens 2 2 Notches	Diffuser Lens 3 3 Notches	Diffuser Lens 4 4 Notches	Diffuser Lens 5 5 Notches	Diffuser Lens 6 6 Notches
XN (4°/5°)	VN	NS				
VN (6°)	NS		NF	M	FL	WFL
NS (10°)						
NF (20°)						
M (30°)				FL		
FL (40°)					WFL	
WFL (60°)						VWFL
VWFL (90°)						

Choose a diffuser lens based on the desired final beam distribution. Refer to the 6-digit part numbers above to order diffuser lenses individually. To order a complete set of 6 diffuser lenses in a bag, refer to the following item names: **LQS**: LQALK-S **LQM**: LQALK-M **LQL**: LQALK-L **LQG**: LQALK-G



The diffuser lenses are intended for mockup purposes only. A lens holder is required to install a diffuser lens on the fixture, order separately using the following names: **LQS**: LQSLSLA-**FINISH**-LQALK **LQM**: LQMLSLA-**FINISH**-LQALK **LQL**: LQLSLA-**FINISH**-LQALK **LQG**: LQGLSLA-**FINISH**-LQALK

Please specify the exterior **FINISH** from the list of finishes in the fixture order code.

Refer to the Diffuser Lens Installation Instructions on the Lumenpulse website for information on installing the diffuser lenses.



Control Boxes (Order Separately)

CBX-DMX/RDM - DMX/RDM Enabled (Daisy Chain or Star Configuration)



DMX/RDM control box. Up to six power and data outputs to fixtures or fixture runs. Consult CBX specification sheet and installation instructions for details. Lumenterminators provided with CBX (2x for Daisy Chain configuration, 6x for Star configuration), consult factory to order spares.


CBX-ENET - Ethernet Enabled (Daisy Chain or Star Configuration)



Ethernet control box. Up to four power and data outputs to fixture or fixture runs. Consult Ethernet CBX specification sheet and installation instructions for details.


Control Systems (Order Separately)

PHAROS - Pharos® Designer Lighting Control Kit

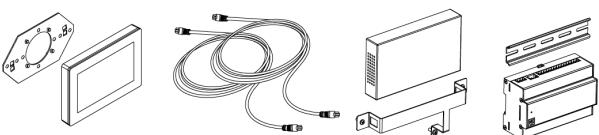

The Pharos Designer Lighting Control Kit, available for 1 or 2 DMX universes, allows for complete control of large lighting installations.

EXPERT - Pharos® Expert Control Kit

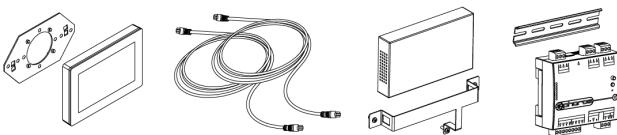

The Pharos Expert Control Kit, available for 1, 2, 4 or 6 DMX universes, allows for complete control of large lighting installations.

Diagnostic And Addressing Tools (Order Separately)

LID - LumenID



The updated LumenID (LID) is an all-in-one diagnostic and addressing solution for both DMX/RDM and Lumentalk (LT) systems. Engineered for versatility, it streamlines commissioning and troubleshooting across protocols—no need for multiple tools. Cable option may vary; please consult factory. For complete details, refer to the LID specification sheet.

EPA Guide

	Fixture			Mounting Options*			
	IQL	IQL with Snoot	IQL with Visor	WAM/WAMRJB			
				6	12	18	24
EPA Front (sq ft)	0.841	0.997	0.997	N/A	N/A	N/A	N/A
EPA Side (sq ft)	0.231	0.596	0.596	0.134	0.287	0.440	0.593
EPA Front 45° (sq ft)	0.787	1.256	1.256	N/A	N/A	N/A	N/A


*Mounting arm only. Fixture EPA calculation must also be considered.

Typical Wiring Diagrams

Wiring Color Code


UL Color Code	USE
Green	Ground
Black	Line 100-277V AC
White	Line/Neutral
Red or Purple	0-10V / Data +
Orange	0-10V / Data -
Gray	Signal common (DMX/RDM only)

Lumentalk (LT)

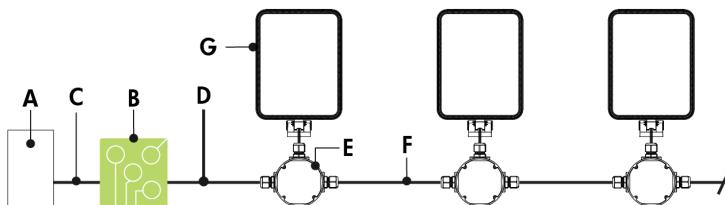

- A - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B - Lumentranslator 2 (LTL2-DMX)
- C - Data wiring (by others)
- D - Power line (100-277V, wiring by others)
- E - Junction box (by others)
- F - Power wiring (by others)
- G - Lumenquad Large


Lumentalk (LT) - Wiring Detail

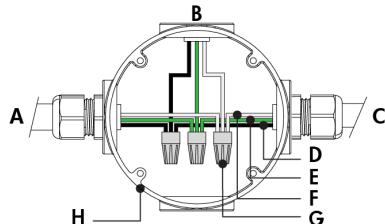

- A - Power input (control over power line via Lumentalk system) or from previous fixture
- B - To fixture
- C - To next fixture
- D - Line
- E - Ground
- F - Line/Neutral
- G - Wire-nuts (by others)
- H - Junction box (by others)


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Lumentalk enabled fixtures must be commissioned using LumentalkID software and a LID. Consult factory for details.
- Maximum of 1 transmitter (Lumentranslator or Lumenlink) per system. No third party fixtures allowed on the same circuit.
- 1 DMX controller per Lumentalk network, maximum of 48 DMX channels per Lumentalk network (minimum step transition update rate is 1 second, minimum fade time between two colors is 1 minute). Consult factory for applications that require additional capabilities.
- 50 watts per fixture.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Lumentalk enabled fixtures must be commissioned using LumentalkID software and a LID. Consult factory for details.
- Maximum of 1 transmitter (Lumentranslator or Lumenlink) per system. No third party fixtures allowed on the same circuit.
- 1 DMX controller per Lumentalk network, maximum of 48 DMX channels per Lumentalk network (minimum step transition update rate is 1 second, minimum fade time between two colors is 1 minute). Consult factory for applications that require additional capabilities.
- 50 watts per fixture.

Star Layout (DMX/RDM)

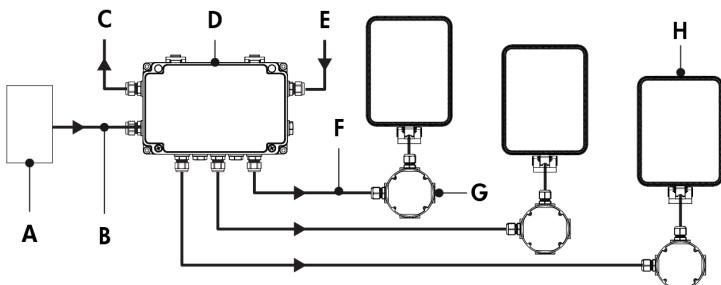

- A** - DMX/RDM controller (order separately from Lumenpulse, or by others)
B - Data input (Belden 9841 or equivalent, by others)
C - Data output to next CBX (optional, not isolated/not boosted)
D - CBX-ST
E - Power input (100-277V, wiring by others)
F - Power and data output to fixture (wiring by others)
G - Junction box (by others)
H - Lumenquad Large

Star Layout (DMX/RDM) - Wiring Detail



- A** - From CBX or previous fixture
B - Lumenterminator*
C - To fixture
D - Data -
E - Data +
F - Neutral
G - Ground
H - Line
I - Signal common
J - Wire-nuts (by others)
K - Junction box (by others)


Maximum Fixture Count

Maximum number of fixtures per run (Based on 15A maximum, 16AWG cable, fixtures spaced 10ft on center, first fixture 50ft from CBX)

Configuration/Voltage	120V	208V	240V	277V
LQL	18	28	32	32


- Consult CBX installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- The DMX/RDM protocol states a maximum of 32 DMX/RDM enabled fixtures on any single run.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 6 outputs per CBX-ST.
- RGB color mixture option requires 3 DMX addresses. RGBW30K and RGBW40K, RGBA, MRGBA, MRGBWP and MRGRBWP color mixture options require 4 DMX addresses.
- DMX terminator is required at the end of each run to maintain data integrity. Six (6x) DMX lumenterminators included per CBX-ST. See installation instructions for details.
- 50 watts per fixture.

Daisy Chain Layout (DMX/RDM)

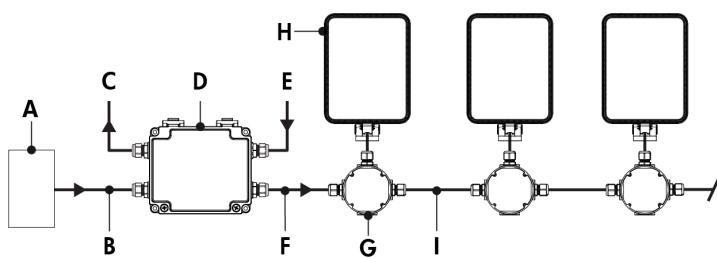

- A** - DMX/RDM controller (order separately from Lumenpulse, or by others)
- B** - Data input (Belden 9841 or equivalent, by others)
- C** - Data output to next CBX (optional, not isolated/not boosted)
- D** - CBX-DS
- E** - Power input (100-277V, wiring by others)
- F** - Power and data output to fixture (wiring by others)
- G** - Junction box (by others)
- H** - Lumenquad Large
- I** - Power and data wiring (by others)

Daisy Chain Layout (DMX/RDM) - Wiring Detail (First or Middle of Run)

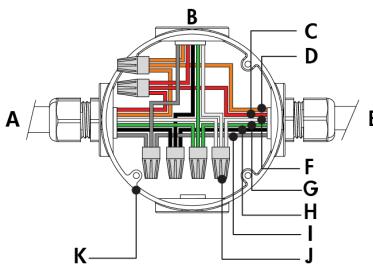

- A** - From CBX or previous fixture
- B** - To fixture
- C** - Data -
- D** - Data +
- E** - To next fixture
- F** - Neutral
- G** - Line
- H** - Ground
- I** - Signal common
- J** - Wire-nuts (by others)
- K** - Junction box (by others)


- Consult CBX installation instructions for additional wiring details.
- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- The DMX/RDM protocol states a maximum of 32 DMX/RDM enabled fixtures on any single run.
- Maximum of 4 DMX/RDM repeaters/CBX cascading in line.
- Maximum of 1 output per CBX-DS.
- Maximum of 3 ft cable length between fixture and next junction box for daisy chain layout.
- RGB color mixture option requires 3 DMX addresses. RGBW30K and RGBW40K, RGBA, MRGBA, MRGBWP and MRGRBWP color mixture options require 4 DMX addresses.
- DMX terminator is required at the end of each run to maintain data integrity. Two (2x) DMX lumenterminators included per CBX-DS. See installation instructions for details.
- 50 watts per fixture.

Maximum Fixture Count

Maximum number of fixtures per run (Based on 15A maximum, 16AWG cable, fixtures spaced 10ft on center, first fixture 50ft from CBX)


Configuration/Voltage	120V	208V	240V	277V
LQL	18	28	32	32

Daisy Chain Layout (DMX/RDM) - Wiring Detail (End of Run)



- A** - From CBX or previous fixture
- B** - Lumenterminator*
- C** - To fixture
- D** - Data -
- E** - Data +
- F** - Neutral
- G** - Ground
- H** - Line
- I** - Signal common
- J** - Wire-nuts (by others)
- K** - Junction box (by others)


DALI 2 T8 (DALIT8)

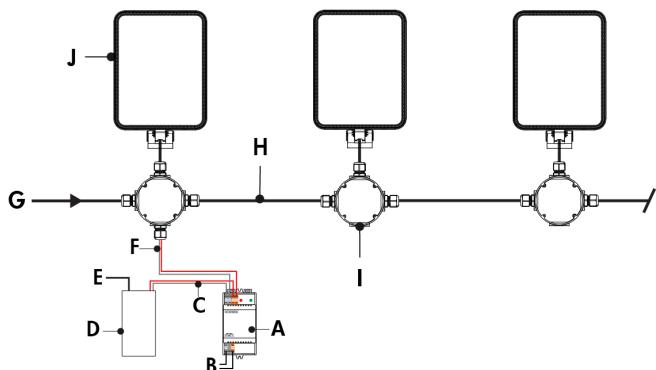

- A** - DALI bus power supply
- B** - Power input for DALI bus power supply (wiring by others)
- C** - Data output to DALI controller (by others)
- D** - DALI controller (by others)
- E** - Power input for DALI controller (if required, wiring by others)
- F** - Data output to fixture
- G** - Power input (100-277V)
- H** - Power and data wiring (by others)
- I** - Junction box (by others)
- J** - Lumenquad (LQL-DALIT8)

- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Maximum of 64 DALI fixtures per DALI loop.
- 100 watts per fixture.
- The Lumenquad responds to RGBWAF for color controls and Tc for dim to warm and tunable white.
- Commissioning may be required based on the selection of 3rd party DALI controller. Controller and commissioning provided by others.

DALI 2 T8 (DALIT8) - Wiring Detail

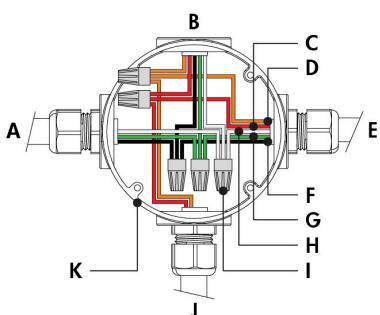

- A** - Power input or from previous fixture
- B** - To fixture
- C** - DA +
- D** - DA -
- E** - To next fixture
- F** - Line
- G** - Ground
- H** - Neutral
- I** - Wire-nuts (by others)
- J** - From DALI controller (by others)
- K** - Junction box (by others)

How to Order

Housing	Voltage	Color and Color Temperature	Optic	Optical Option ⁽¹⁴⁾	Mounting Options ^{(16) (17)}	Finish	Control	Option	Certification	Cable Length ^{(26) (31) (33)}
LQL Lumenquad Large ⁽¹⁾	100 100 Volts	MRGBWP Opticolor+™ Mix-at- Source Red, Green, Blue Plus White Settable Range 24K to 65K ^{(2) (3)} [4] [5] [6]	VN Very Narrow 6° ^{(11) (12)}	LSLH Linear Spread Lens Horizontal Distribution ⁽¹⁵⁾	SM Surface Mount	BK Black Sandtex®	LT Lumentalk ^{(23) (24)}	CRC Corrosion- Resistant Coating ^{(28) (29)}	UL UL Compliant	3FT 3 ft ^{(26) (32)}
120 120 Volts	120 120 Volts	NS Narrow Spot 10° ⁽¹¹⁾	LSLV Linear Spread Lens Vertical Distribution ⁽¹⁵⁾	WM Wall Mount Bracket with Decorative Cover	BRZ Bronze Sandtex®	DMX/RDM DMX/RDM Enabled Dimming ^{(25) (26)}	CE CE Compliant ⁽³⁰⁾	10FT 10 ft		
208 208 Volts	208 208 Volts	HL Honeycomb Louver ⁽¹²⁾ ⁽¹⁵⁾	WMNC Wall Mount Bracket without Decorative Cover	SI Silver Sandtex®	DALI8 DALI 2 T8 Enabled Dimming 0.1% ^{(4) (27)}	CEII CE Compliant Class II Double Insulated ⁽³⁰⁾	20FT 20 ft			
220 220 Volts	220 220 Volts	NF Narrow Flood 20° ⁽¹¹⁾	WAM6 Wall Arm Mount 6 in with Decorative Cover	WH Smooth White	WHTX Smooth White	50FT 50 ft				
240 240 Volts	240 240 Volts	M Medium 30° ⁽¹¹⁾	WAM6NC Wall Arm Mount 6 in without Decorative Cover	BKTX Textured Black	BRZTX Textured Bronze Non- Metallic	70FT 70 ft				
277 277 Volts	277 277 Volts	FL Flood 40° ⁽¹¹⁾	WAM12 Wall Arm Mount 12 in with Decorative Cover	GRATX Textured Medium Gray	GRNTX Textured Green	100FT 100 ft				
		WFL Wide Flood 60° ⁽¹¹⁾	WAM12NC Wall Arm Mount 12 in without Decorative Cover	WHTX Textured White	CC Custom Color & Finish ^{(20) (21) (22)}					
		VWFL Very Wide Flood 90° ^{(11) (13)}	WAM18 Wall Arm Mount 18 in with Decorative Cover							
		NAS Narrow Asymmetric ^{(11) (12)}	WAM18NC Wall Arm Mount 18 in without Decorative Cover							
		WW Asymmetric Wallwash ^{(11) (12)}	WAM24 Wall Arm Mount 24 in with Decorative Cover ⁽¹⁸⁾							
			WAM24NC Wall Arm Mount 24 in without Decorative Cover ⁽¹⁸⁾							
			WMRJB Recessed JBOX Wall Mount with Decorative Cover							
			WMRJBC Recessed JBOX Wall Mount without Decorative Cover							
			WAMRJB6 Recessed JBOX Wall Arm Mount 6 in with Decorative Cover							
			WAMRJB6NC Recessed JBOX Wall Arm Mount 6 in without Decorative Cover							
			WAMRJB12 Recessed JBOX Wall Arm Mount 12 in with Decorative Cover							
			WAMRJB12NC Recessed JBOX Wall Arm Mount 12 in without Decorative Cover							
			WAMRJB18 Recessed JBOX Wall Arm Mount 18 in with Decorative Cover							
			WAMRJB18NC Recessed JBOX Wall Arm Mount 18 in without Decorative Cover							
			WAMRJB24 Recessed JBOX Wall Arm Mount 24 in with Decorative Cover							
			WAMRJB24NC Recessed JBOX Wall Arm Mount 24 in without Decorative Cover							
			RPM4/1 Round Pole Mount 4 in							
			RPM4.5/1 Round Pole Mount 4.5 in							

				RPM5/1 Round Pole Mount 5 in RPM4/2 Round Pole Mount 4 in for two fixtures RPM4.5/2 Round Pole Mount 4.5 in for two fixtures RPM5/2 Round Pole Mount 5 in for two fixtures PLTU Lumentech Pole Mount (19) TN2 Tenon Adapter for 2 3/8 in O.D. Pole TN4 Tenon Adapter for 4 in O.D. Pole SK Stake Mount			
--	--	--	--	---	--	--	--

Notes:

1. Consult factory for products that are BAA-approved (Buy America.n Act).
2. Not available for VN, NAS and WW optics.
3. Fixtures are shipped from the factory in Optidrive™ Mode. Normal Mode can be activated onsite for DMX/RDM and LT fixtures. For DMX/RDM applications, Optidrive Mode requires a LumenID, LumenID software and onsite commissioning. For LT applications, Optidrive Mode requires a LumenID, LumentalkID software and onsite commissioning. Additionally, with Opticolor+™ the white CCT is configurable in the field from 2200K-8000K.
4. Consult factory for the availability of more color and CCT options (e.g. royal blue).
5. MRGBWP and MRGRBWP can be configured to MRGB via RDM, consult factory for more details.
6. Consult factory for DALI T8 applications with MRGBWP or MRGRBWP and a CCT other than 3000K.
7. Not available with XN, VN, NAS and WW optics.
8. Consult factory for availability of other color options such as Royal Blue.
9. Longer lead times of 10-12 weeks.
10. Consult factory for photometric performance.
11. Factory installed, not interchangeable on site.
12. Not available with MRGBA, MRGBWP and MRGRBWP color temperature options.
13. Available with MRGBA, MRGBWP and MRGRBWP color temperature options only.
14. Optical options are factory installed and cannot be changed in the field.
15. Not available with WFL, VVFL, NAS and WW optics.
16. All mounting options (except for SM mounting) are interchangeable. Consult factory for details.
17. All mounting options have a pivot adjustable in 6° increments, consult factory for universal pivot option.
18. A cable length of 10 ft or greater must be specified.
19. Available for Lumentech poles with a square or round profile. A PLTU - Universal Yoke accessory must be ordered with the Lumentech pole for the Lumentech to fit with the PLTU mounting option. Refer to Lumentech specification sheet and installation instructions for more details.
20. Lumenpulse offers a wide selection of RAL CLASSIC (K7) colors with a smooth texture and high-gloss finish. Please consult factory for a list of available K7 colors, other RAL textures and glosses, or to match alternate color charts. Final color matching results may vary.
21. Setup charges apply for RAL colors. Consult factory for details.
22. Longer lead times can be expected for custom RAL color finishes.
23. A Lumentranslator 2 (LTL2) and LumenID (LID) must be specified for Lumentalk applications. Consult Lumentranslator 2 and Lumentalk pages and specification sheets for details.
24. Not available with CEC certification option.
25. A Control Box (CBX) and LumenID (LID) must be specified.
26. Maximum of 3 ft cable length for daisy chain DMX applications with CBX-DS.
27. DALI 2 T8 controller required, provided by others. DALI2 T8 control uses a single DALI short address.
28. Use only when exposed to salt spray. This option is not required for normal outdoor exposure.
29. Setup charges apply. Consult factory for details.
30. Consult European specification sheets and installation instructions for CE and CE Class II wiring information.
31. Not applicable to WMRJB, WMRJBNC and WAMRB 6 in to 24 in mounting options (with or without decorative cover). Cable lengths for these mounting options are determined by the length of the mounting bracket.
32. Not available with WAM24 or WAM24NC mounting options.
33. UL fixtures specified with a Smooth white finish and a SM, WM, WMNC, or WAM 6 in to 24 in mounting option (with or without decorative cover) are provided with a white cable. A black cable is provided for all other fixture configurations.