


Project Name

Qty

Type

Catalog / Part Number

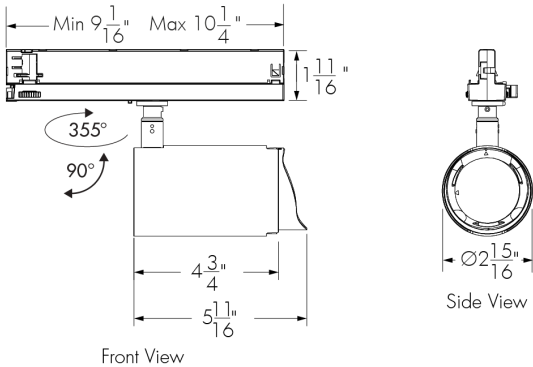

Track adapter dimensions may vary, please refer to [Track Adapter Length](#) section for more information.

Photometric Summary

Consult the Photometric Information section of the Specification Sheet for 3000K CRI 92 data. For all other configurations, consult IES files on the Lumenpulse website.

Color and Color Temperature




Color Rendering

CRI 92 CRI 98

Control

ON/OFF 0-10V DALI Phase Dimming

Finish

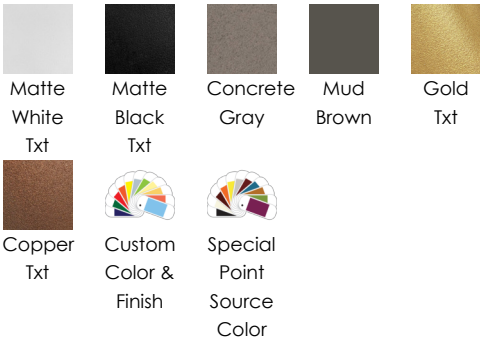

Description

The Exenia REVO SPOT LV Compact Wallwash track-mounted line voltage fixtures utilize a driver integrated into the adapter to provide a clean, simplistic look, while its deep washer gives uniform coverage from the top of the wall to the floor. REVO SPOT LV luminaires boast a marked performance-to-size ratio and a wide range of finishes.


Features

Output (Nominal Lumens)	L07: 700 lm L10: 1000 lm L13: 1300 lm
Color and Color Temperature	27K: 2700K 30K: 3000K 35K: 3500K 40K: 4000K
Finish	MWHTX: Matte White Txt MBKTX: Matte Black Txt CGY: Concrete Gray MDB: Mud Brown GTX: Gold Txt CTX: Copper Txt CC: Custom Color and Finish (Please Specify RAL Color) SP: Special Color (Choose From standard Point Source Color Palette)
Track Adapter Finish	AWH: Matte White ABK: Matte Black
Optic (Nominal Distribution)	DW: Deep Washer
Warranty	5-year limited warranty
Performance	
Maximum Delivered Output	Up to 1,578 lm (L13, CRI 92, 40K, DW)

Track Adapter Finish



Adjustability



Lumencycle™ Program



Certifications



Maximum Delivered Intensity	3,660 cd at nadir (L13, CRI 92, 40K, DW)
Efficacy	Up to 89 lm/W (L07, CRI 92, 40K, DW)
Color Rendering	92: CRI 92 98: CRI 98
Color Consistency	2 SDCM
Lumen Maintenance	L70 120,000 hours L95 19,000 hours

Physical

Housing Material	Die cast aluminum
Optics Material	Polymethyl methacrylate (PMMA)
Weight	2.31 lbs (fixture only)
Adjustability	355° Rotation, 90° Tilt

Electrical and Control

Voltage	120: 120 Volts
Wattage Range	9.3 to 19.4 Watts Refer to the Wattage Information section for more information.
Control	NO: On/Off Control DIM: 0-10V Dimming 1% DALI: DALI Dimming 1% PH: Phase Dimming 1%
Track Mounting	3-Circuit track required, refer to A.A.G Stucchi ONETRACK™ product page and specification sheet for compatible track system and accessories

Environmental

Ingress Protection Rating	IP40
Environment	Damp location (interior applications only)
Operating Temperature	-4 °F to 86 °F

Important


Virtual Patent Marking Notice

This website (<https://www.lmpg.com/patents-trademarks>) is provided to satisfy the virtual patent marking provisions of applicable jurisdictions. Some products listed may be covered by additional patents not referenced here.

Lumencycle™ Program


Lumencycle is a comprehensive program designed to maximize the life of Lumenpulse fixtures while preserving their performance, quality, and design intent. Built around three pillars—Repair, Restore, and Recycle—the program provides clear pathways to maintain existing installations, restore fixtures, and responsibly manage them at end of life. For full program details, visit <https://www.lumenpulse.com/lumencycle>.

Deep Washer Guidelines (Spacing and Setback)

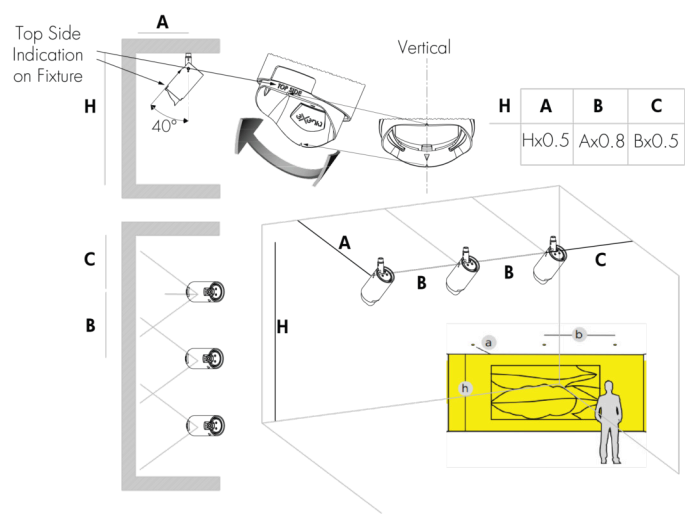

Photometric Information

Deep Washer L13, 3000K, CRI 92

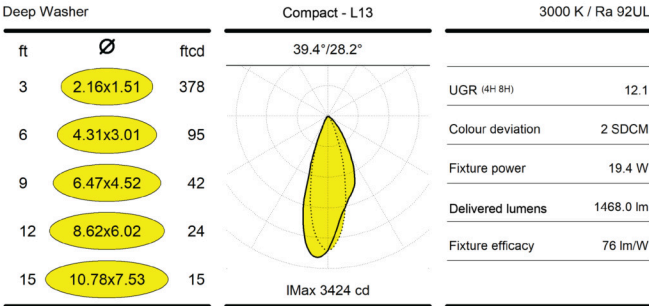

Wattage Information

L07 - Output

DW	Deep Washer	9.3W
----	-------------	------

L10 - Output


DW	Deep Washer	13.3W
----	-------------	-------

L13 - Output

DW	Deep Washer	19.4W
----	-------------	-------

Track Adapter Length

CONTROL	OPTIC	TRACK ADAPTER LENGTH
NO DALI DIM	DW:Deep Washer	10 ¹ / ₄ "
PH	DW:Deep Washer	9 ¹ / ₁₆ "

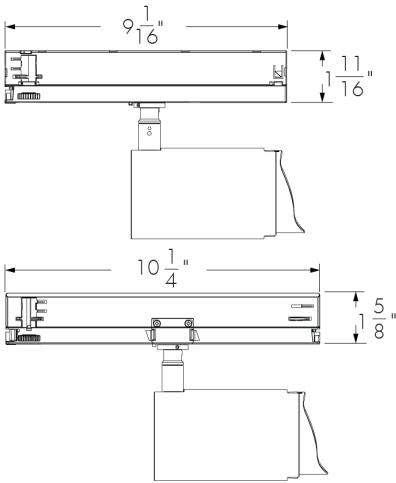

How to Order

Housing	Size	Voltage	Track Adapter Type	Control	Output (Nominal Lumens)	Finish	Track Adapter Finish	Color Rendering	Color and Color Temperature	Optic (Nominal Distribution)	Accessories
TRS REVO SPOT LV 1x	C Compact	120 120 Volts	3C Three Circuit Track Adapter ⁽¹⁾	NO On/Off Control DIM 0-10V Dimming 1% DALI DALI Dimming 1% PH Phase Dimming 1% ⁽²⁾ ⁽³⁾	L07 700 lm L10 1000 lm L13 1300 lm	MWHTX Matte White Txt MBKTX Matte Black Txt CGY Concrete Gray MDB Mud Brown GTX Gold Txt CTX Copper Txt CC Custom Color & Finish ⁽⁴⁾ SP Special Point Source Color ⁽⁵⁾	AWH Matte White ABK Matte Black	92 CRI 92 98 CRI 98	27K 2700K 30K 3000K 35K 3500K 40K 4000K	DW Deep Washer	NA No Accessory

Notes:

1. Track and track accessories are sold separately. Refer to A.A.G Stucchi ONETRACK™ product page and specification sheet for compatible track system.
2. Phase dimming (PH) is only compatible with 120V power.
3. Not available for L07 lumen output.
4. Longer lead times can be expected for custom RAL color finishes.
5. Refer to Cylinder specification sheet and brochure for color options.