


Project Name

Qty

Type

Catalog / Part Number

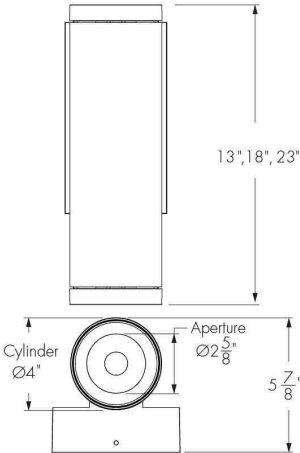

Front view

Bottom view

Photometric Summary

Based on Wide Faceted Reflector (nominal 60°), 4000K, CRI 90+

Nominal output [lm]	Delivered output [lm] ^[2]	Power (120V) [W] ^[3]	Efficacy [lm/W]	Power (277V) [W] ^[3]	Efficacy [lm/W]
700	732	6.5	113	8	92
1000	963	8	120	10	96
1300	1,310	11	119	13	101
2000	2,042	18	113	19	107


¹. Photometric performance is measured in compliance with IESNA LM-79-24.

². Information based on direct or indirect lighting. Double the wattage and performance information for direct/indirect applications.

³. Consult website for latest IES files.

⁴. Add 3 watts per fixture when specifying Lumentalk™.

Optics

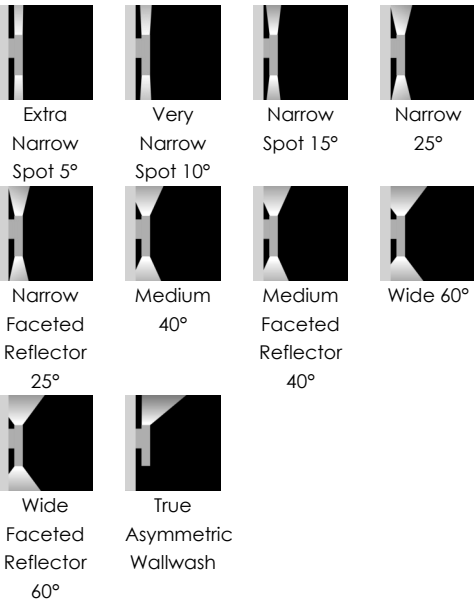

Description

The Lumencore Cylinder Small Wall Mount Direct/Indirect is a high-performance LED luminaire that can simultaneously or individually offer direct and indirect lighting. It is ideal for commercial, residential or hospitality applications and delivers up to 2000 lumens from a 4 in diameter. The Lumencore Cylinder Small Wall Mount Direct/Indirect comes in a number of finishes, or can be color-specified to fit your taste. Its accessories, beam angles, trims, and optics are easily and quickly changeable in the field.

Features

Mounting	Wall Mount
Light Direction	Direct/Indirect lighting
Length	13 in, 18 in, 23 in
Output (Nominal Lumens)	700 lm, 1000 lm, 1300 lm, 2000 lm
Color and Color Temperature	2200K, 2700K, 3000K, 3500K, 4000K, Dim to Warm (2700K to 2200K), Dim to Warm Plus (3500K to 1800K), Dynamic White (2700K to 6500K), Dynamic Warm White (2200K to 3000K), Dynamic Warm White Plus (2200K to 3500K)
Direct Lighting Optics (Nominal Distribution)	Extra Narrow Spot 5°, Very Narrow Spot 10°, Narrow Spot 15°, Narrow 25°, Narrow Faceted Reflector 25°, Medium 40°, Medium Faceted Reflector 40°, Wide 60°, Wide Faceted Reflector 60°
Indirect Lighting Optics (Nominal Distribution)	Extra Narrow Spot 5°, Very Narrow Spot 10°, Narrow Spot 15°, Narrow 25°, Narrow Faceted Reflector 25°, Medium 40°, Medium Faceted Reflector 40°, Wide 60°, Wide Faceted Reflector 60°, True Asymmetric Wallwash
Optical Accessories	Snoot, Half Snoot, Honeycomb Louver, Concentric Ring Louver, Clear Glass Lens, Softening Glass Lens, Prismatic Diffuser, Linear Spread Lens Narrow (1° x 40°), Linear Spread Lens Wide (1° x 60°), Decorative Ring

Colors and Color Temperatures



2200K



2700K



3000K



3500K



4000K



D-TW
Dim to warm

2700K - 2200K



D-TWP
Dim to warm plus

3500K - 1800K



D-WH
Dynamic white

2700K - 6500K



D-WW
Dynamic warm

2200K - 3000K



D-WWP
Dynamic warm plus

2200K - 3500K

Controls

ON/OFF PH PPH 0-10V PRO 0-10V DALI PRO DALI

DALIT8   

Finishes



MWH-Matte White



MBK-Matte Black



MBR-Matte Brown



MOR-Matte Orange



MGR-Matte Green



MBL-Matte Blue



MSI-Matte Silver



GWH-Glossy White



GBK-Glossy Black



GYL-Glossy Yellow




GLR-Glossy Red




GVI-Glossy Violet



GGR-Glossy Green




GIY-Glossy Ivory




CGY-Concrete Gray




MLG-Metalized Gray



IBR-Italian Brick Red



PWH-Parget White



CC-Custom Color and Finish
(Please Specify RAL Color)

Lumencycle™ Program



Warranty	5-year limited warranty
Performance	
Maximum Delivered Output	Up to 2,713 lm (narrow spot optic 15°, 4000K, CRI 90, direct or indirect lighting)
Maximum Delivered Intensity	Up to 63,952 cd (extra narrow spot optic 5°, 4000K, CRI 80, direct or indirect lighting)
Efficacy	Up to 129 lm/W (narrow spot optic 15°, 4000K, CRI 80)
Color Consistency	2 SDCM, 3 SDCM (XN optic only)
Color Rendering	CRI 80+, CRI 90+, CRI 95+
Lumen Maintenance	L95 55,000 hrs L70 225,000 hrs
UGR	< 19 (not applicable to WW optic)
Physical	
Weight	Up to 7.62 lbs
Housing Material	Aluminum
TIR Optics Material	Clear polycarbonate
Reflector Material	Aluminum
Electrical and Control	
Voltage	120 Volts, 277 Volts, 347 Volts
Control	On/Off Control, Phase Dimming, Phase Dimming 1%, Standard 0-10V Dimming 1% (Linear or Logarithmic Curve), Professional 0-10V Dimming 0.1% (Linear or Logarithmic Curve), Standard DALI Dimming 1% (Linear or Logarithmic Curve), Professional DALI Dimming 0.1% (Linear or Logarithmic Curve), DALI-2 T8 Enabled Dimming 1%, Lumentalk Enabled Dimming, Lutron® Hi-lume 1% EcoSystem® LDE1/PEQ1 Soft-on/Fade-to-Black, DMX/RDM Enabled Dimming 1%
Environmental	
Environment	Damp location (interior applications only)
Operating Temperature	-4 °F to 86 °F
Ingress Protection Rating	IP20
Accessories (Order Separately)	
Control Boxes	DMX/RDM enabled (Daisy Chain or Star Configuration), Ethernet enabled (Daisy Chain or Star Configuration)
Control Systems	Pharos® Designer Lighting Control Kit (PHAROS), Consult Control Systems section for details
Diagnostic and Addressing Tools	LumenID (LID)

Certifications



Important

Virtual Patent Marking Notice


This website (<https://www.lmpg.com/patents-trademarks>) is provided to satisfy the virtual patent marking provisions of applicable jurisdictions. Some products listed may be covered by additional patents not referenced here.

Lumencycle™ Program


Lumencycle is a comprehensive program designed to maximize the life of Lumenpulse fixtures while preserving their performance, quality, and design intent. Built around three pillars—Repair, Restore, and Recycle—the program provides clear pathways to maintain existing installations, restore fixtures, and responsibly manage them at end of life. For full program details, visit <https://www.lumenpulse.com/lumencycle>.

Fixture Dimensions


13 in

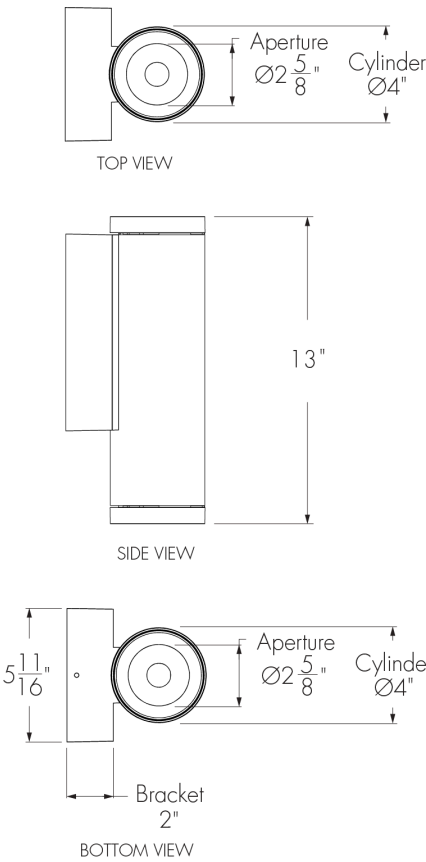


18 in

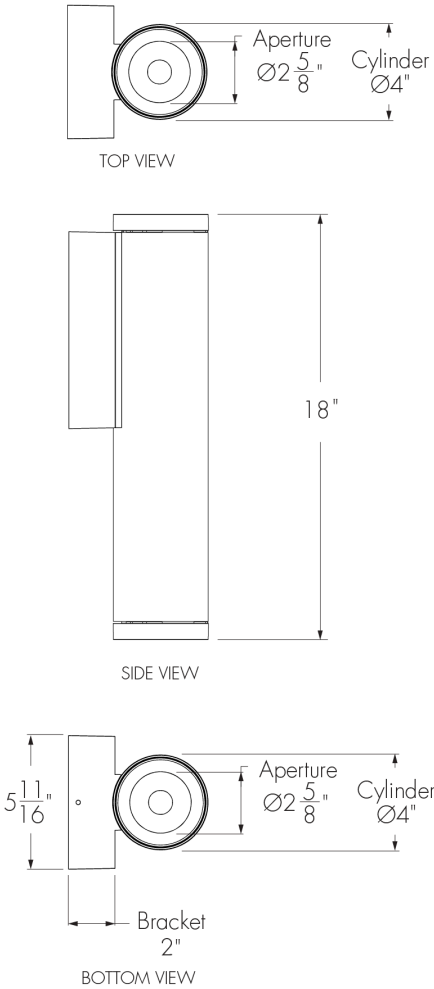


23 in

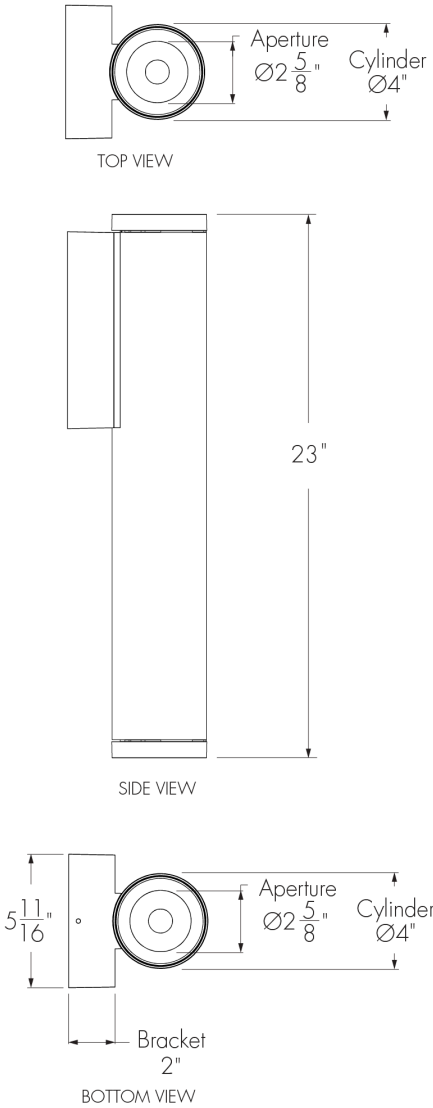

Mounting Bracket Details

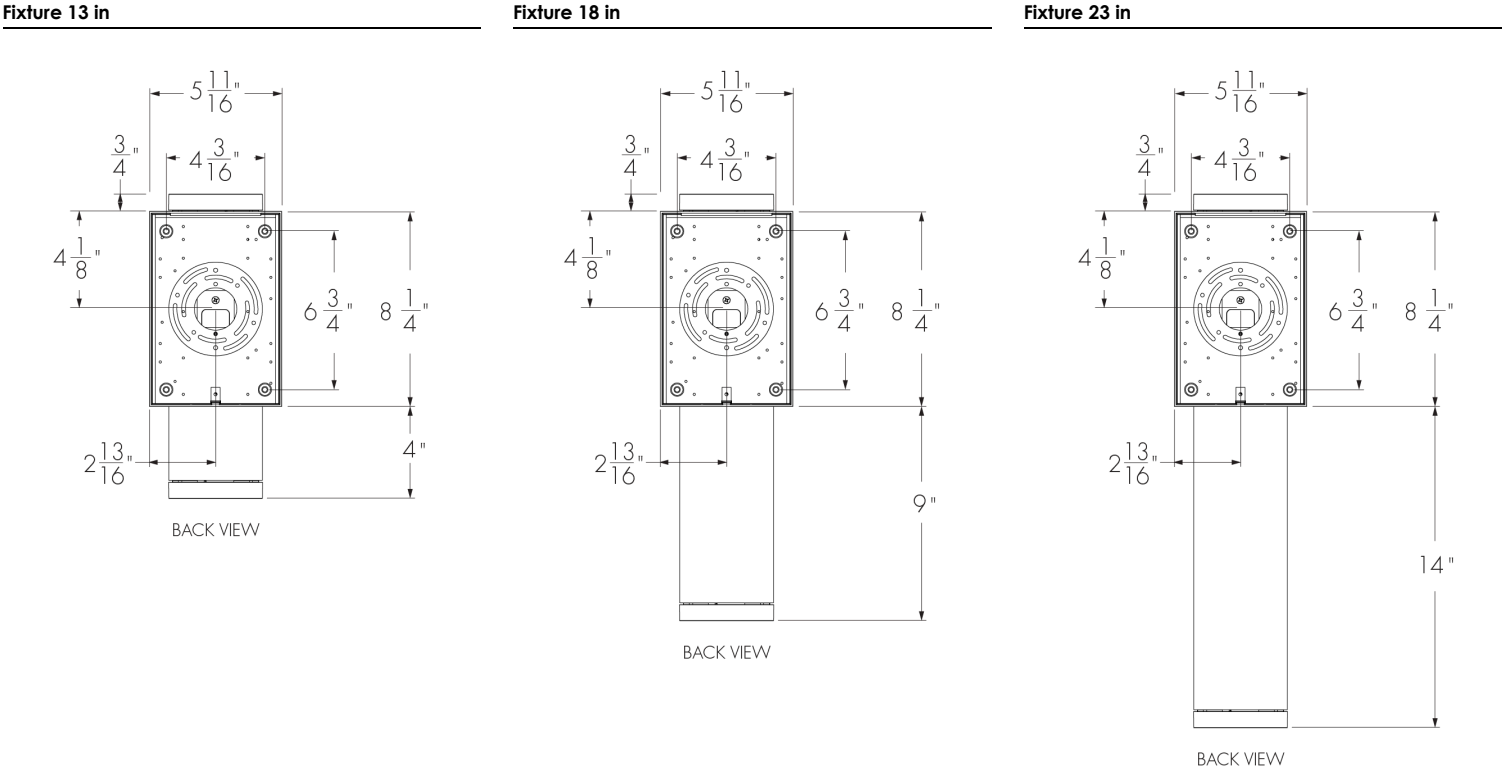

Optical Accessory Dimensions (13 in Fixture Shown)

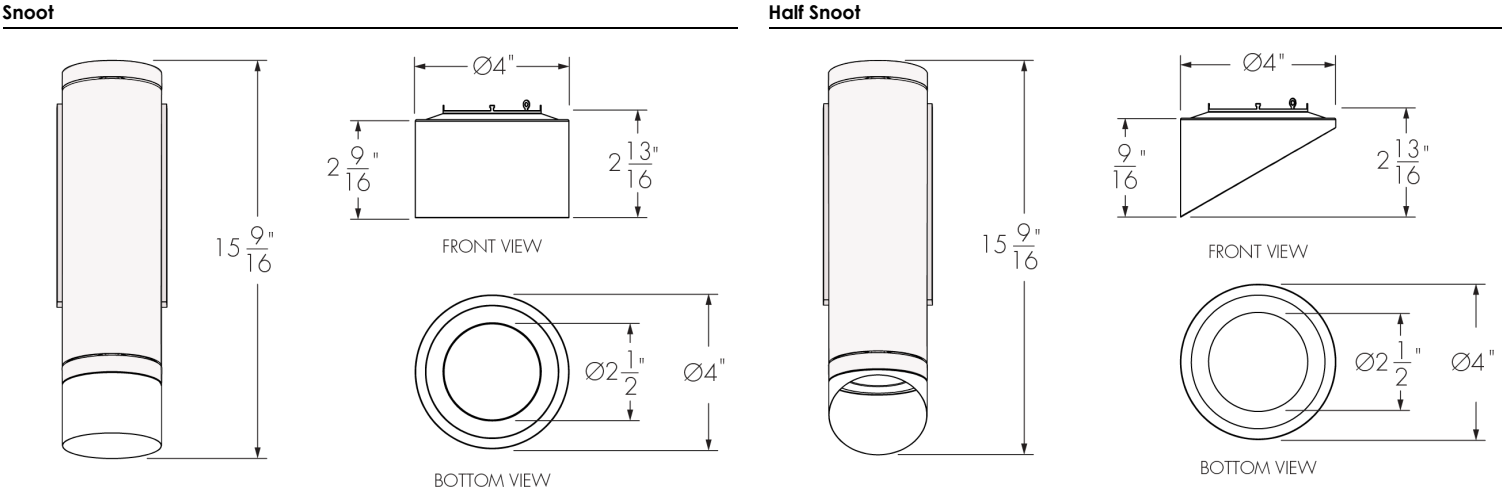

Photometric Information - Color Rendering Options Comparison, 3000K

Color sample	Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
CRI 80+	84	82	90	97	83	82	88	86	63	15	77	83	68	84	98	75
CRI 90+	94	95	98	99	95	94	97	91	80	55	93	97	83	96	99	89
CRI 95+	97	96	97	99	96	96	95	96	97	97	96	95	86	96	98	97
Radiant CRI 80+	84	83	91	96	81	82	89	83	62	15	79	80	69	85	98	76
Radiant CRI 95+	95	95	94	95	98	94	90	94	96	96	89	95	80	94	98	96

Optics

TIR Optic
XN/VN/NS/N



Semi-Specular reflector
M/W




Faceted reflector
NFR/MFR/WFR




Color and Color Temperature

Color Temperature Ranges

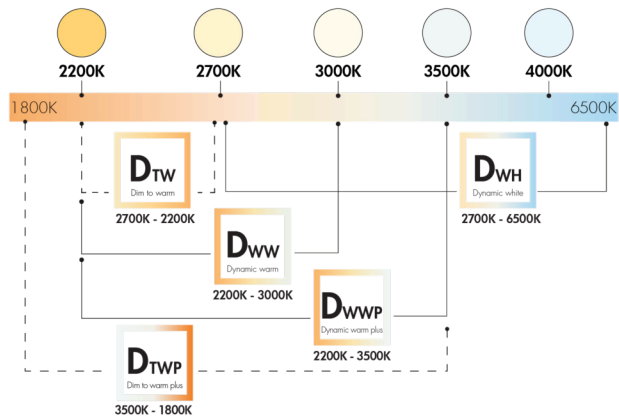

- 1 channel (DTW, DTWP) Compatible with: DA1 SDALI DMXrdm lumen talk
 - 2 channels (DWH, DWW, DWWP) Compatible with: DALI8 DMXrdm lumen talk
 - 3 channels* (DWH, DWW, DWWP) Compatible with: DALI8 DMXrdm lumen talk
- * Can be field changeable via RDM & LT for individual CCT control.

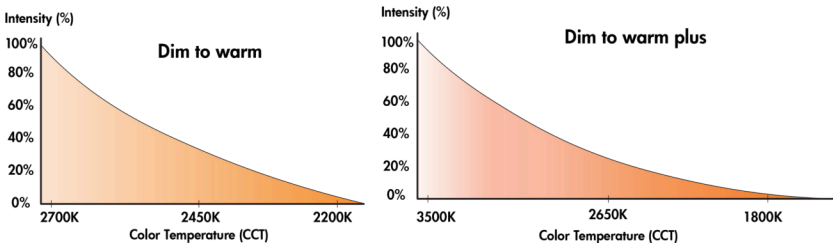

Control

On/off control

NO - On/off control

Phase dimming

PH - Phase dimming

PPH - Phase 1% dimming

Standard 0-10V dimming down to 1%

DAMC - Standard 0-10V dimming to 1% linear curve

DA1 - Standard 0-10V dimming, 1% linear

DA2 - Standard 0-10V dimming, 1% logarithmic

DA3 - Standard 0-10V dimming, 1% linear (347V)

Professional 0-10V dimming down to 0.1%

PDA1 - Pro 0-10V dimming, 0.1% linear

PDA2 - Pro 0-10V dimming, 0.1% logarithmic

Standard DALI dimming down to 1%

SDALI1 - Standard DALI dimming, 1% linear

SDALI2 - Standard DALI dimming, 1% logarithmic

Professional DALI dimming down to 0.1%

DALI1 - Pro DALI dimming, 0.1% linear

DALI2 - Pro DALI dimming, 0.1% logarithmic

DALI dimming Type 8

DALI8 - DALI-2 dimming Type 8 (multi channel capability)

Refer to How to Order Pages and the website product configurator for exceptions.

lumen talk dimming


LT - Lumentalk dimming, 1% minimum dimming value

Lutron® EcoSystem®

ES - Lutron® Hi-Lume 1% EcoSystem® LDE1/PEQ1 Soft-on/Fade-to-Black
1% minimum dimming value

DMXrdm

DMX/RDM - DMX/RDM enabled

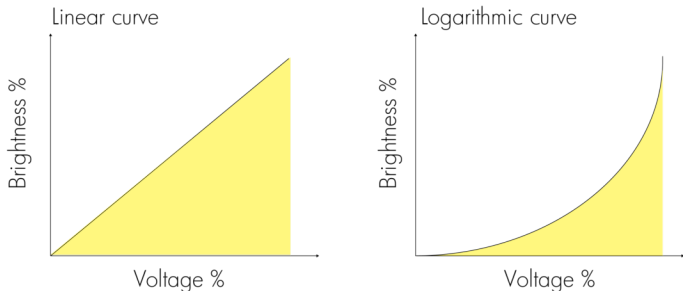

Photometric Information - Direct Or Indirect Lighting Optics

XN - Extra Narrow Spot (Nominal 5°), 4000K [1]

Nominal output [lm]	Power (120V) [W]†		Power (277V) [W]†		Delivered output [lm]††	
	CR80	CR90	CR80	CR90	CR80	CR90
700	10.5	10.5	11.5	11.5	684	616

Candlepower
distribution

VN - Very Narrow Spot (Nominal 10°), 4000K [1]

Nominal output [lm]	Power (120V) [W]†		Power (277V) [W]†		Delivered output [lm]††	
	CR80	CR90	CR80	CR90	CR80	CR90
700	10.5	10.5	11.5	11.5	763	687
1000	15	15	16	16	1,013	912

Candlepower
distribution

NS - Narrow Spot (Nominal 15°), 4000K [1]

Nominal output [lm]	Power (120V) [W]†			Power (277V) [W]†			Delivered output [lm]††		
	CR80	CR90	CR95	CR80	CR90	CR95	CR80	CR90	CR95
700	7.5	7.5	8.5	9	9	10.5	969	969	872
1000	11	11	13	13	13	15	1,279	1,279	1,151
1300	13	13	18	15	15	20	1,744	1,744	1,570
2000	21	21	N/A	22	22	N/A	2,713	2,713	N/A

Candlepower
distribution

N - Narrow (Nominal 25°), 4000K [1]

Nominal output [lm]	Power (120V) [W]†			Power (277V) [W]†			Delivered output [lm]††		
	CR80	CR90	CR95	CR80	CR90	CR95	CR80	CR90	CR95
700	6.5	6.5	7	8	8	9	698	698	628
1000	8	8	11	10	10	13	921	921	829
1300	11	11	13	13	13	15	1,256	1,256	1,130
2000	18	18	21	19	19	22	1,953	1,953	1,758

Candlepower
distribution

M - Medium (Nominal 40°), 4000K [1]

Nominal output [lm]	Power (120V) [W]†			Power (277V) [W]†			Delivered output [lm]††		
	CR80	CR90	CR95	CR80	CR90	CR95	CR80	CR90	CR95
700	6.5	6.5	7	8	8	9	714	714	643
1000	8	8	11	10	10	13	943	943	849
1300	11	11	13	13	13	15	1,286	1,286	1,157
2000	18	18	21	19	19	22	2,000	2,000	1,800

Candlepower
distribution

MFR - Medium Faceted Reflector (Nominal 40°), 4000K [1]

Nominal output [lm]	Power (120V) [W]†			Power (277V) [W]†			Delivered output [lm]††		
	CR80	CR90	CR95	CR80	CR90	CR95	CR80	CR90	CR95
700	6.5	6.5	7	8	8	9	764	764	688
1000	8	8	11	10	10	13	1,009	1,009	908
1300	11	11	13	13	13	15	1,376	1,376	1,238
2000	18	18	21	19	19	22	2,140	2,140	1,926

Candlepower
distribution

W - Wide (Nominal 60°), 4000K [1]

Nominal output [lm]	Power (120V) [W]†			Power (277V) [W]†			Delivered output [lm]††		
	CR80	CR90	CR95	CR80	CR90	CR95	CR80	CR90	CR95
700	6.5	6.5	7	8	8	9	684	684	616
1000	8	8	11	10	10	13	900	900	810
1300	11	11	13	13	13	15	1,224	1,224	1,102
2000	18	18	21	19	19	22	1,908	1,908	1,717

Candlepower
distribution

WFR - Wide Faceted Reflector (Nominal 60°) [1]


Nominal output [lm]	Power (120V) [W]†			Power (277V) [W]†			Delivered output [lm]††		
	CR80	CR90	CR95	CR80	CR90	CR95	CR80	CR90	CR95
700	6.5	6.5	7	8	8	9	732	732	659
1000	8	8	11	10	10	13	963	963	867
1300	11	11	13	13	13	15	1,310	1,310	1,179
2000	18	18	21	19	19	22	2,042	2,042	1,837

Candlepower
distribution

[1] Information based on direct or indirect lighting. Double the wattage and performance information based on optic, output, color rendering and control options.
† Delivered wattage: +/- 10% tolerance. Add 3 watts per fixture when specifying Lumentalk™.
†† Consult website for latest IES files. Delivered output: +/- 10% tolerance.
Photometric performance is measured in compliance with IESNA LM-79-24.


Typical Wiring Diagrams (Refer to Installation Instructions for Additional Wiring Details)

On/Off Control (NO)



- A - Power input for direct lighting (120-347V)
- B - Power input for indirect lighting (120-347V)
- C - Octagonal junction box (by others)
- D - Power wiring for direct lighting (by others)
- E - Power wiring for indirect lighting (by others)
- F - Lumencore Cylinder Small Wall Mount Direct/Indirect

On/Off Control (NO) - Wiring Detail

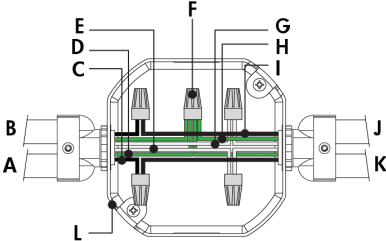


- A - Power input (direct lighting), or from previous fixture
- B - Power input (indirect lighting), or from previous fixture
- C - Line (direct lighting)
- D - Ground (direct lighting)
- E - Neutral (direct lighting)
- F - Wire-nuts (by others)
- G - Neutral (indirect lighting)
- H - Ground (indirect lighting)
- I - Line (indirect lighting)
- J - To fixture or to next fixture (indirect lighting)
- K - To fixture or to next fixture (direct lighting)
- L - Octagonal junction box (by others)

Wiring Color Code


Color	USE
Green	Ground
Black	Line
White	Neutral
Red or purple	0-10V / Data +
Orange or grey	0-10V / Data -

Phase Dimming (PH, PPH, PPH2)

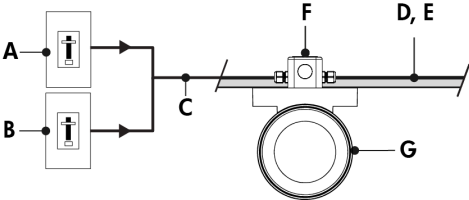

- A - Phase dimmer for direct lighting (by others)
- B - Phase dimmer for indirect lighting (by others)
- C - Phase dimmed power circuit (120V)
- D - Power wiring for direct lighting (by others)
- E - Power wiring for indirect lighting (by others)
- F - Octagonal junction box (by others)
- G - Lumencore Cylinder Small Wall Mount Direct/Indirect

Phase Dimming (PH, PPH, PPH2) - Wiring Detail

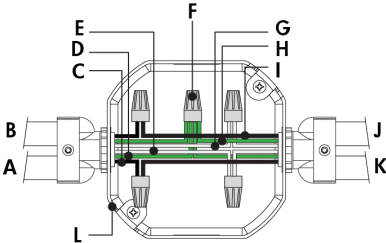


- A - Power input (direct) or from previous fixture
- B - Power input (indirect) or from previous fixture
- C - Line (direct lighting)
- D - Ground (direct lighting)
- E - Neutral (direct lighting)
- F - Wire-nuts (by others)
- G - Neutral (indirect lighting)
- H - Ground (indirect lighting)
- I - Line (indirect lighting)
- J - To fixture or to next fixture (indirect lighting)
- K - To fixture or to next fixture (direct lighting)
- L - Octagonal junction box (by others)

Wiring Color Code

Color	USE
Green	Ground
Black	Line
White	Neutral
Red or purple	0-10V / Data +
Orange or grey	0-10V / Data -


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Consult Photometric Information pages for wattage information.

0-10V Dimming (DAMC, DA1, DA2, DA3, PDA1, PDA2)

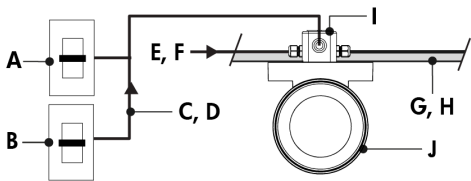

- A - Dimmer for direct lighting (by others)
- B - Dimmer for indirect lighting (by others)
- C - Data wiring for direct lighting (by others)
- D - Data wiring for indirect lighting (by others)
- E - Power input for direct lighting (120-347V)
- F - Power input for indirect lighting (120-347V)
- G - Power and data wiring for direct lighting (by others)
- H - Power and data wiring for indirect lighting (by others)
- I - Octagonal junction box (by others)
- J - Lumencore Cylinder Small Wall Mount Direct/Indirect

0-10V Dimming (DAMC, DA1, DA2, DA3, PDA1, PDA2) - Wiring Detail




- A - Power input (direct lighting), or from previous fixture
- B - Power input (indirect lighting), or from previous fixture
- C - From dimmer for direct lighting (by others)
- D - From dimmer for indirect lighting (by others)
- E - To fixture or to next fixture (direct lighting)
- F - To fixture or to next fixture (indirect lighting)
- G - Wire-nuts (by others)
- H - Octagonal junction box (by others)
- I - Neutral
- J - Ground
- K - 0-10V -
- L - 0-10V +
- M - Line

Wiring Color Code

Color	USE
Green	Ground
Black	Line
White	Neutral
Red or purple	0-10V / Data +
Orange or grey	0-10V / Data -


- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Consult Photometric Information pages for wattage information.

Lumentalk (LT)

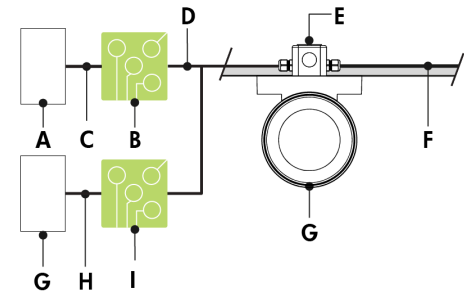

- A - Dimmer/controller for direct lighting (by others)
- B - Data wiring for direct lighting (by others)
- C - Lumentranslator 2 for direct lighting (LTL2-DIM, -DMX, -TRIAC, -DALI)
- D - Power line (120-277V AC)
- E - Octagonal junction box (by others)
- F - Power wiring by others
- G - Dimmer/controller for indirect lighting (by others)
- H - Data wiring for indirect lighting (by others)
- I - Lumentranslator for indirect lighting (LTL-010, -DMX, -TRIAC, -DALI)
- J - Lumencore Cylinder Small Wall Mount Direct/Indirect

Lumentalk (LT) - Wiring Detail

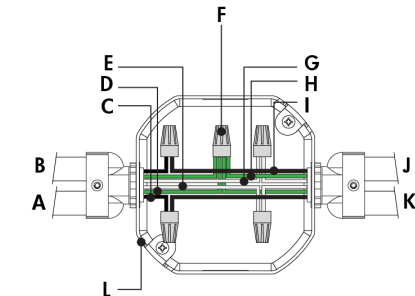

- A - Power input for direct lighting (control over power line via Lumentalk system) or from previous fixture
- B - Power input for indirect lighting (control over power line via Lumentalk system) or from previous fixture
- C - Line for direct lighting
- D - Ground for direct lighting
- E - Neutral for direct lighting
- F - Wire-nuts (by others)
- G - Neutral for indirect lighting
- H - Ground for indirect lighting
- I - Line for indirect lighting
- J - To fixture or to next fixture (indirect lighting)
- K - To fixture or to next fixture (direct lighting)
- L - Octagonal junction box (by others)

Wiring Color Code

Color	USE
Green	Ground
Black	Line
White	Neutral
Red or purple	0-10V / Data +
Orange or grey	0-10V / Data -

- Consult factory for specific applications and maximum fixture count/cable length recommendations.
- Lumentalk enabled fixtures must be commissioned using LumentalkID software and a LID-LT. Consult factory for details.
- Maximum of 1 transmitter (Lumentranslator 2 or Lumenlink) per system. No third party fixtures allowed on the same circuit.
- For DMX applications: 1 DMX controller per Lumentalk network, maximum of 48 DMX channels per Lumentalk network (minimum step transition update rate is 1 second, minimum fade time between two colors is 1 minute). Consult factory for DALI Lumentalk applications. Consult factory for applications that require additional capabilities.
- Consult Photometric Information pages for wattage information.


Optical Accessories

SN - Snoot



LACYS - SN

XLVR - Concentric Ring Louver



LACYS - XLVR

PD - Prismatic Diffuser



LACYS - PD

HSN - Half Snoot




LACYS - HSN

CL - Clear Glass Lens




LACYS - CL

LSN - Linear Spread Lens Narrow (1° x 40°)




Horizontal Beam Distribution

LACYS - LSN



Vertical Beam Distribution

HL - Honeycomb Louver




LACYS - HL

SL - Softening Glass Lens




LACYS - SL

LSW - Linear Spread Lens Wide (1° x 60°)



Horizontal Beam Distribution

LACYS - LSW



Vertical Beam Distribution


DR - Decorative Ring



LACYS - DR


Control Boxes (Order Separately)

CBX-DMX/RDM - DMX/RDM Enabled (Daisy Chain or Star Configuration)

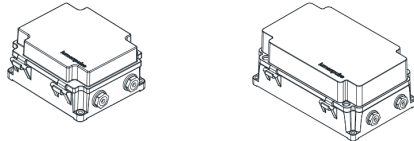

DMX/RDM control box. Up to six power and data outputs to fixtures or fixture runs. Consult CBX specification sheet and installation instructions for details. Lumenterminators provided with CBX (2x for Daisy Chain configuration, 6x for Star configuration), consult factory to order spares.

CBX-ENET - Ethernet Enabled (Daisy Chain or Star Configuration)

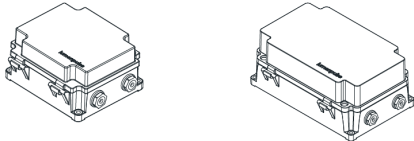

Ethernet control box. Up to four power and data outputs to fixture or fixture runs. Consult Ethernet CBX specification sheet and installation instructions for details.

Diagnostic And Addressing Tools (Order Separately)

LID - LumenID



The updated LumenID (LID) is an all-in-one diagnostic and addressing solution for both DMX/RDM and Lumentalk (LT) systems. Engineered for versatility, it streamlines commissioning and troubleshooting across protocols—no need for multiple tools. Cable option may vary; please consult factory. For complete details, refer to the LID specification sheet.

Control Systems (Order Separately)

PHAROS - Pharos® Designer Lighting Control Kit



The Pharos Designer Lighting Control Kit, available for 1 or 2 DMX universes, allows for complete control of large lighting installations.

EXPERT - Pharos® Expert Control Kit



The Pharos Expert Control Kit, available for 1, 2, 4 or 6 DMX universes, allows for complete control of large lighting installations.

How to Order

Housing ⁽¹⁾	Certification	Mounting	Light Direction	Voltage	Length	Direct Lighting Output (Nominal Lumens)	Direct Lighting Color Temperature	Direct Lighting Color Rendering	Direct Lighting Optics (Nominal Distribution)
LACYS Lumencore Cylinder Small - Ø4 in	A UL/cUL	WM Wall Mount	DI Direct/Indirect lighting	120 120 Volts 277 277 Volts 347 347 Volts ⁽²⁾ ⁽³⁾	13 13 in 18 18 in 23 23 in	dL07 700lm dL10 1000lm ⁽⁴⁾ dL13 1300lm ⁽⁵⁾ dL20 2000lm ⁽⁵⁾	22K 2200K ⁽³⁾ ⁽⁶⁾ 27K 2700K 30K 3000K 35K 3500K 40K 4000K DTW Dim to Warm (2700K to 2200K) ⁽⁷⁾ ⁽⁸⁾ DTWP Dim to Warm Plus (3500K to 1800K) ⁽⁷⁾ ⁽⁸⁾ DWH Dynamic White (2700K to 6500K) ⁽⁸⁾ ⁽⁹⁾ DWW Dynamic Warm White (2200K to 3000K) ⁽⁸⁾ ⁽⁹⁾ DWWP Dynamic Warm White Plus (2200K to 3500K) ⁽⁸⁾ ⁽⁹⁾	CR80 CRI 80+ ⁽¹⁰⁾ CR90 CRI 90+ CR95 CRI 95+ RCR80 Radiant CRI 80+ ⁽³⁾ ⁽¹¹⁾ RCR95 Radiant CRI 95+ ⁽³⁾ ⁽¹¹⁾	XN Extra Narrow Spot 5° ⁽¹²⁾ VN Very Narrow Spot 10° ⁽¹³⁾ NS Narrow Spot 15° N Narrow 25° NFR Narrow Faceted Reflector 25° M Medium 40° MFR Medium Faceted Reflector 40° W Wide 60° WFR Wide Faceted Reflector 60°

- Notes:
1. The optics and color temperature options specified for direct lighting may limit the available options for indirect lighting. The optics and color temperature options specified for indirect lighting may limit the available options for direct lighting. Refer to website product configurator for all exceptions.

2. Not available for 700 lumens.

3. Not available for XN and VN optics.

4. Available for VN, NS, N, NFR, M, MFR, W and WFR optics only.

5. Available for NS, N, NFR, M, MFR, W and WFR optics only.

6. Available for CR80 only.

7. Available for 1000 lumens when combined with CR90 and NFR, M, MFR, W or WFR optics only.

8. NFR, MFR and WFR faceted reflector optics are recommended for optimal performance.

9. Available for 700 lumens when combined with CR80 and NFR, M, MFR, W or WFR optics only.

10. Available for 2200K, 2700K, 3000K, 3500K, 4000K and DWH, DWW or DWWP color options only.

11. Radiant CRI options available for 3000K only.

12. Available for 700 lumens when combined with CR80 or CR90 color rendering options only.

13. Available for 700 and 1000 lumens when combined with CR80 or CR90 color rendering options only.

How to Order

Direct Lighting Control ⁽¹⁴⁾	Direct Lighting Accessories ^{(35) (36)}	Indirect Lighting Output (Nominal Lumens)	Indirect Lighting Color Temperature	Indirect Lighting Color Rendering	Indirect Lighting Optics (Nominal Distribution)
NO On/Off Control ^{(15) (16) (17)}	NA No Accessory	iL07 700lm	22K 2200K ^{(3) (6)}	CR80 CRI 80+ ⁽¹⁰⁾	XN Extra Narrow Spot 5°
PH Phase Dimming ^{(16) (17) (18) (19)}	SN Snoot ⁽³⁷⁾	iL10 1000lm ⁽⁴⁵⁾	27K 2700K	CR90 CRI 90+	VN Very Narrow Spot 10°
PPH Phase Dimming 1% ^{(3) (17) (19) (20)}	HSN Half Snoot ⁽³⁷⁾	iL13 1300lm ⁽⁴⁶⁾	30K 3000K	CR95 CRI 95+	NS Narrow Spot 15°
DAMC Standard 0-10V Dimming 1% Linear Curve ^{(17) (21) (22) (23) (24)}	HL Honeycomb Louver ⁽³⁸⁾	iL20 2000lm ⁽⁴⁶⁾	35K 3500K	RCR80 Radiant CRI 80+ ^{(3) (11)}	N Narrow 25°
DA1 Standard 0-10V Dimming 1% Linear Curve ^{(16) (25) (26)}	XLVR Concentric Ring Louver ⁽³⁹⁾		40K 4000K	RCR95 Radiant CRI95+ ^{(3) (11)}	NFR Narrow Faceted Reflector 25°
DA2 Standard 1-10V Dimming 1% Logarithmic Curve ^{(16) (25) (26)}	CL Clear Glass Lens		DTW Dim to Warm (2700K to 2200K) ^{(7) (8) (47)}		M Medium 40°
DA3 Standard 0-10V Dimming 1% Linear Curve (347V) ^{(16) (26)}	SL Softening Glass Lens		DTWP Dim to Warm Plus (3500K to 1800K) ^{(7) (8) (47)}		MFR Medium Faceted Reflector 40°
PDA1 Professional 0-10V Dimming 0.1% Linear Curve ^{(16) (17) (25)}	PD Prismatic Diffuser ⁽⁴⁰⁾		DWH Dynamic White (2700K to 6500K) ^{(8) (9) (47)}		W Wide 60°
PDA2 Professional 0-10V Dimming 0.1% Logarithmic Curve ^{(16) (17) (25)}	LSN Linear Spread Lens Narrow (1° x 40°) ^{(41) (42)}		DWW Dynamic Warm White (2200K to 3000K) ^{(8) (9) (47)}		WFR Wide Faceted Reflector 60°
SDALI1 Standard DALI Dimming 1% Linear Curve ^{(23) (27)}	LSW Linear Spread Lens Wide (1° x 60°) ^{(42) (43)}		DWWP Dynamic Warm White Plus (2200K to 3500K) ^{(8) (9) (47)}		WW True Asymmetric Wallwash ^{(48) (49)}
SDALI2 Standard DALI Dimming 1% Logarithmic Curve ^{(23) (27)}	DR Decorative Ring ⁽⁴⁴⁾				
DALI1 Professional DALI Dimming 0.1% Linear Curve ^{(16) (17) (28)}					
DALI2 Professional DALI Dimming 0.1% Logarithmic Curve ^{(16) (17) (28)}					
DALIT8 DALI-2 T8 Enabled Dimming 1% ^{(29) (30)}					
ES Lutron® Hi-lume 1% EcoSystem® LDE1/PEQ1 Soft-on/Fade-to-Black ^{(3) (17) (31)}					
LT Lumentalk Enabled Dimming ^{(16) (32)}					
DMX/RDM DMX/RDM Enabled Dimming 1% ^{(16) (33) (34)}					

Notes:

3. Not available for XN and VN optics.

6. Available for CR80 only.

7. Available for 1000 lumens when combined with CR90 and NFR, M, MFR, W or WFR optics only.

8. NFR, MFR and WFR faceted reflector optics are recommended for optimal performance.

9. Available for 700 lumens when combined with CR80 and NFR, M, MFR, W or WFR optics only.

10. Available for 2200K, 2700K, 3000K, 3500K, 4000K and DWH, DWW or DWWP color options only.

11. Radiant CRI options available for 3000K only.

14. Control options vary according to color temperature, color rendering and optics combination. Refer to website product configurator for details.

15. Manufacturer's choice driver. Order code may change to NO1.

16. Available up to 1300 lumens (CR80, RCR80, CR90, CR95 or RCR95) and 2000 lumens (CR80, RCR80 or CR90) for NS optic. Available up to 2000 lumens (CR80, RCR80, CR90, CR95 or RCR95) for N, NFR, M, MFR, W and WFR optics.

17. Not available for DTW, DTWP, DWH, DWW or DWWP color options.

18. Manufacturer's choice driver. Order code may change to PH1 or PH2.

19. Available for 120V voltage option only.

20. Manufacturer's choice driver. Order code is subject to change.

21. Manufacturer's choice driver. Order code may change to DAMC1 or DAMC2.

22. Not available for XN and VN optics.

23. Not available with 347V.

24. Available up to 2000 lumens when combined with CR90 or CR95 color rendering options.

25. Driver cuts off power to the fixture when the control signal drops below 0.5V.

26. Not available for DWH, DWW or DWWP color options.

27. Available for DTW and DTWP color options only, when combined with 1000 lumens.

28. Consult factory for other DALI control options for static color temperatures.

29. Available for DWH, DWW and DWWP color options only. DALI-2 Type 8 controller required.

30. Consult factory for DALIT8 control option.
31. One EcoSystem® address per fixture. 1% minimum dimming value. Lutron® EcoSystem® Enabled dimming not available for 700 lumens or 1000 lumens.

32. A Lumentranslator 2 (LTL2) and LumenID (LID) must be specified for Lumentalk applications. Consult Lumentranslator 2 and Lumentalk pages and specification sheets for details.

33. A Control Box (CBX-DS or CBX-ST) and LumenID (LID) must be specified.

34. Configurable to 1, 2, or 3 channel control via RDM in the field.

35. Accessories specified in the fixture code are factory installed but can also be changed in the field. Refer to installation instructions for details. To order accessories separately, refer to the Optical Accessories section of the specification sheet.

36. Maximum of two lenses can be installed for direct lighting. Maximum of two lenses can be installed for indirect lighting. The snoot or half snoot can be combined with any accessory. The clear glass lens and softening glass lens cannot be combined together. The linear spread lenses (LSN and LSW) are compatible with the snoot and half snoot accessories only.

37. Matte black interior surface, exterior finish matches housing color.

38. When combined with another accessory, the HL will be factory-installed in second position (furthest from the LED source).

39. Available for XN, VN and NS optics only.

40. Can be combined with HL accessory for 2200K, 2700K, 3000K, 3500K and 4000K color options only.

41. Nominal 10° x 40° distribution when used with the NS optic.

42. Available for XN, VN, NS, N and NFR optics when combined with 2200K, 2700K, 3000K, 3500K, 4000K color options only. Available for NFR optic only when combined with DTW, DTWP, DWH, DWW or DWWP color options only.

43. Nominal 10° x 60° distribution when used with the NS optic.

44. No other accessories can be combined with the decorative ring accessory. A decorative ring replaces the bezel on a fixture. If a decorative ring is chosen as a direct lighting accessory, a bezel finish can be selected for indirect lighting. If a decorative ring is chosen as an indirect lighting accessory, a bezel finish can be selected for direct lighting.

45. Available for VN, NS, N, NFR, M, MFR, W, WFR and WW optics only.

46. Available for NS, N, NFR, M, MFR, W, WFR and WW optics only.

47. Not available for WW optic.

48. Accessories not available for WW optic.

49. The color of the true asymmetric wallwash baffle matches the fixture bezel.

How to Order

Indirect Lighting Control ⁽¹⁴⁾	Indirect Lighting Accessories ^{(35) (36) (46)}	Finish	Bezel	Bezel Finish ⁽⁵²⁾
NO On/Off Control ^{(15) (17) (50)}	NA No Accessory	MWH Matte White	b Bezel	MWH Matte White
PH Phase Dimming ^{(17) (18) (19) (50)}	SN Snoot ⁽³⁷⁾	MBK Matte Black		MBK Matte Black
PPH Phase Dimming 1% ^{(3) (17) (19) (20)}	HSN Half Snoot ⁽³⁷⁾	MBR Matte Brown		MBR Matte Brown
DAMC Standard 0-10V Dimming 1% Linear Curve ^{(17) (21) (22) (23) (24)}	HL Honeycomb Louver ⁽³⁸⁾	MOR Matte Orange		MOR Matte Orange
DA1 Standard 0-10V Dimming 1% Linear Curve ^{(25) (26) (50)}	XLVR Concentric Ring Louver ⁽³⁹⁾	MGR Matte Green		MGR Matte Green
DA2 Standard 1-10V Dimming 1% Logarithmic Curve ^{(25) (26) (50)}	CL Clear Glass Lens	MBL Matte Blue		MBL Matte Blue
DA3 Standard 0-10V Dimming 1% Linear Curve (347V) ^{(26) (50)}	SL Softening Glass Lens	MSI Matte Silver		MSI Matte Silver
PDA1 Professional 0-10V Dimming 0.1% Linear Curve ^{(17) (25) (50)}	PD Prismatic Diffuser ⁽⁴⁰⁾	GWH Glossy White		GWH Glossy White
PDA2 Professional 0-10V Dimming 0.1% Logarithmic Curve ^{(17) (25) (50)}	LSN Linear Spread Lens Narrow (1° x 40°) ^{(41) (42)}	GBK Glossy Black		GBK Glossy Black
SDALI1 Standard DALI Dimming 1% Linear Curve ^{(23) (27)}	LSW Linear Spread Lens Wide (1° x 60°) ^{(42) (43)}	GYL Glossy Yellow		GYL Glossy Yellow
SDALI2 Standard DALI Dimming 1% Logarithmic Curve ^{(23) (27)}	DR Decorative Ring ⁽⁴⁴⁾	GLR Glossy Red		GLR Glossy Red
DALI1 Professional DALI Dimming 0.1% Linear Curve ^{(17) (28) (50)}		GVI Glossy Violet		GVI Glossy Violet
DALI2 Professional DALI Dimming 0.1% Logarithmic Curve ^{(17) (28) (50)}		GGR Glossy Green		GGR Glossy Green
DALI18 DALI-2 T8 Enabled Dimming 1% ^{(29) (30)}		GIY Glossy Ivory		GIY Glossy Ivory
ES Lutron® Hi-lume 1% EcoSystem® LDE1/PEQ1 Soft-on/Fade-to-Black ^{(3) (17) (31)}		CGY Concrete Gray		CGY Concrete Gray
LT Lumentalk Enabled Dimming ^{(32) (50)}		MLG Metalized Gray		MLG Metalized Gray
DMX/RDM DMX/RDM Enabled Dimming 1% ^{(33) (34) (50)}		IBR Italian Brick Red		IBR Italian Brick Red
		PWH Parget White		PWH Parget White
		CC Custom Color & Finish ⁽⁵¹⁾		CC Custom Color & Finish ⁽⁵¹⁾

Notes:

3. Not available for XN and VN optics.

14. Control options vary according to color temperature, color rendering and optics combination. Refer to website product configurator for details.

15. Manufacturer's choice driver. Order code may change to NO1.

17. Not available for DTW, DTWP, DWH, DWW or DWWP color options.

18. Manufacturer's choice driver. Order code may change to PH1 or PH2.

19. Available for 120V voltage option only.

20. Manufacturer's choice driver. Order code is subject to change.

21. Manufacturer's choice driver. Order code may change to DAMC1 or DAMC2.

22. Not available for XN and VN optics.

23. Not available with 347V.

24. Available up to 2000 lumens when combined with CR90 or CR95 color rendering options.

25. Driver cuts off power to the fixture when the control signal drops below 0.5V.

26. Not available for DWH, DWW or DWWP color options.

27. Available for DTW and DTWP color options only, when combined with 1000 lumens.

28. Consult factory for other DALI control options for static color temperatures.

29. Available for DWH, DWW and DWWP color options only. DALI-2 Type 8 controller required.

30. Consult factory for DALI18 control option.

31. One EcoSystem® address per fixture. 1% minimum dimming value. Lutron® EcoSystem® Enabled dimming not available for 700 lumens or 1000 lumens.

32. A Lumentranslator 2 (LTL2) and LumenID (LID) must be specified for Lumentalk applications. Consult Lumentranslator 2 and Lumentalk pages and specification sheets for details.
33. A Control Box (CBX-DS or CBX-ST) and lumenID (LID) must be specified.

34. Configurable to 1, 2, or 3 channel control via RDM in the field.

35. Accessories specified in the fixture code are factory installed but can also be changed in the field. Refer to installation instructions for details. To order accessories separately, refer to the Optical Accessories section of the specification sheet.

36. Maximum of two lenses can be installed for direct lighting. Maximum of two lenses can be installed for indirect lighting. The snoot or half snoot can be combined with any accessory. The clear glass lens and softening glass lens cannot be combined together. The linear spread lenses (LSN and LSW) are compatible with the snoot and half snoot accessories only.

37. Matte black interior surface, exterior finish matches housing color.

38. When combined with another accessory, the HL will be factory-installed in second position (furthest from the LED source).

39. Available for XN, VN and NS optics only.

40. Can be combined with HL accessory for 2200K, 2700K, 3000K, 3500K and 4000K color options only.

41. Nominal 10° x 40° distribution when used with the NS optic.

42. Available for XN, VN, NS, N and NFR optics when combined with 2200K, 2700K, 3000K, 3500K, 4000K color options only. Available for NFR optic only when combined with DTW, DTWP, DWH, DWW or DWWP color options only.

43. Nominal 10° x 60° distribution when used with the NS optic.

44. No other accessories can be combined with the decorative ring accessory. A decorative ring replaces the bezel on a fixture. If a decorative ring is chosen as a direct lighting accessory, a bezel finish can be selected for indirect lighting. If a decorative ring is chosen as an indirect lighting accessory, a bezel finish can be selected for direct lighting.

48. Accessories not available for WW optic.

50. Available up to 1300 lumens (CR80, RCR80, CR90, CR95 or RCR95) and 2000 lumens (CR80, RCR80 or CR90) for NS and WW optics. Available up to 2000 lumens (CR80, RCR80, CR90, CR95 or RCR95) for N, NFR, M, MFR, W and WFR optics.

51. Longer lead times can be expected for custom RAL color finishes.

52. Direct and indirect lighting bezel finishes are the same.