


Project Name

Qty

Type

Catalog / Part Number

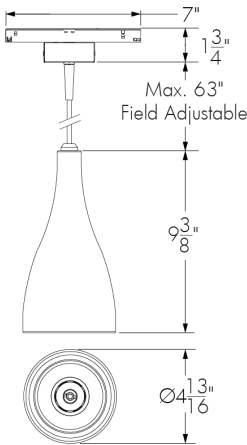


Front View

Bottom View

Photometric Summary

Consult the Photometric Information section of the Specification Sheet for 3000K CRI 92 data. For all other configurations, consult IES files on the Lumenpulse website.

Color and Color Temperature



Color Rendering

CRI 92 CRI 98

Control

1-10V DALI

Track Adapter and Cable Finish



Description

Playful yet powerful, the WILLY 48V Small, track-mounted pendants are inherently decorative; they are designed to be seen, they have a presence, even when unlit. Exenia's command of paints, textures, and finishes makes our pendants especially striking. The vast choice of colored finishes makes them highly applicable to any color scheme or type of space for work or leisure.

Features

Output (Nominal Lumens)	L07: 700 lm
Color and Color Temperature	27K: 2700K 30K: 3000K 35K: 3500K 40K: 4000K
Track Adapter Finish	AWH: Matte White ABK: Matte Black
Finish	GLR: Glossy Red IBR: Italian Brick Red GGR: Glossy Green GYL: Glossy Yellow GWH: Glossy White MBK: Matte Black MBL: Matte Blue CRT: Corten CGY: Concrete Gray CC: Custom Color and Finish (Please Specify RAL Color) SP: Special Color (Choose From standard Point Source Color Palette)

Finish



Special
Point
Source
Color

Bezel Finish



Lumencycle™ Program



Certifications



Bezel Finish

GLR: Glossy Red
IBR: Italian Brick Red
GGR: Glossy Green
GYL: Glossy Yellow
GWH: Glossy White
MBK: Matte Black
MBL: Matte Blue
CGY: Concrete Gray
CC: Custom Color and Finish (Please Specify RAL Color)
SP: Special Color (Choose From Standard Point Source Color Palette)

Optic (Nominal Distribution)

FL: Flood 35°
XWFL: Extra Wide Flood 75°

Warranty

5-year limited warranty

Performance

Maximum Delivered Output Up to 1,095 lm (L07, CRI 92, 40K, XWFL)

Maximum Delivered Intensity 1,738 cd at nadir (L07, CRI 92, 40K, FL)

Efficacy Up to 113 lm/W (L07, CRI 92, 40K, XWFL)

Color Rendering
92: CRI 92
98: CRI 98

Color Consistency 2 SDCM

Lumen Maintenance
L70 120,000 hours
L95 19,000 hours

Physical

Housing Material Spun aluminum (Spun steel for Corten finish)

Reflector Material Polycarbonate

Weight 1.98 lbs (fixture only)

Electrical and Control

Voltage **48:** 48 Volts

Wattage 9.7 Watts

Control
DIM: 1-10V Dimming 1%
DALI: DALI Dimming 1%

Flicker Designed to comply with recommended practices of IEEE 1789:2015

Track Mounting 48V Low voltage track required, refer to A.A.G Stucchi MULTISYSTEM® product page and specification sheet for compatible track system and accessories

Environmental

Ingress Protection Rating IP20

Environment Damp location (interior applications only)

Operating Temperature -4 °F to 86 °F

Important

Virtual Patent Marking Notice


This website (<https://www.lmpg.com/patents-trademarks>) is provided to satisfy the virtual patent marking provisions of applicable jurisdictions. Some products listed may be covered by additional patents not referenced here.

Lumencycle™ Program


Lumencycle is a comprehensive program designed to maximize the life of Lumenpulse fixtures while preserving their performance, quality, and design intent. Built around three pillars—Repair, Restore, and Recycle—the program provides clear pathways to maintain existing installations, restore fixtures, and responsibly manage them at end of life. For full program details, visit <https://www.lumenpulse.com/lumencycle>.

Photometric Information

Flood, L07, 3000K, CRI 92

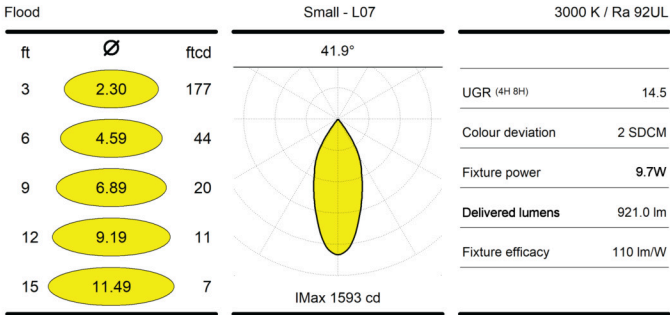

Extra Wide Flood, L07, 3000K, CRI 92

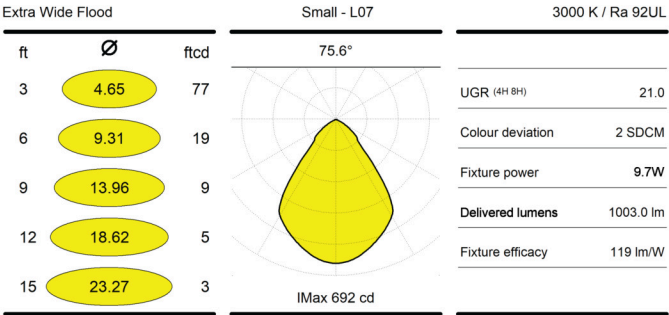


For all other configurations, consult IES files on the Lumenpulse website.

Wattage Information

L07 - Output

FL	Flood	9.7W
XWFL	Extra Wide Flood	

Dimming Curve

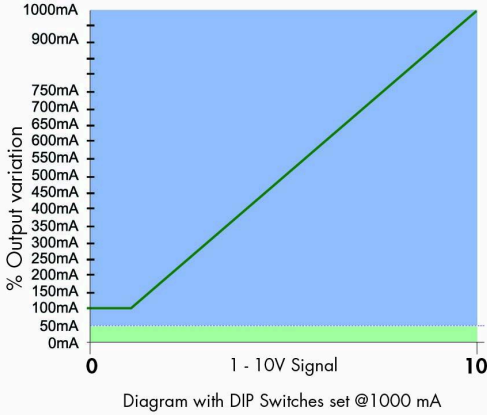

How to Order

Housing	Size	Voltage	Track Adapter Type	Control	Output (Nominal Lumens)	Finish	Track Adapter Finish ⁽⁵⁾	Color Rendering	Color and Color Temperature	Bezel Finish	Optic (Nominal Distribution)
T48WL WILLY	SM Small	48 48 Volts	LVT Low Voltage Track ⁽¹⁾	DIM 1-10V Dimming 1% DALI DALI Dimming 1%	L07 700 lm	GLR Glossy Red IBR Italian Brick Red GGR Glossy Green GYL Glossy Yellow GWH Glossy White MBK Matte Black MBL Matte Blue CGY Concrete Gray CRT Corten ⁽²⁾ CC Custom Color & Finish ⁽³⁾ SP Special Color (Choose From Standard Point Source Color Palette) ⁽⁴⁾	AWH Matte White ABK Matte Black	92 CRI 92 98 CRI 98	27K 2700K 30K 3000K 35K 3500K 40K 4000K	GLR Glossy Red IBR Italian Brick Red GGR Glossy Green GYL Glossy Yellow GWH Glossy White MBK Matte Black MBL Matte Blue CGY Concrete Gray CC Custom Color & Finish ⁽³⁾ SP Special Color (Choose From Standard Point Source Color Palette) ⁽⁴⁾	FL Flood 35° XWFL Extra Wide Flood 75°

- Notes:
1. Track and track accessories are sold separately. Refer to A.A.G. Stucchi MULTISYSTEM® EVO product page and specification sheet for compatible track system.

2. The Corten finish, achieved through a natural process, may show variations in tone and texture, which are expected and not considered imperfections.

3. Longer lead times can be expected for custom RAL color finishes.

4. Refer to Cylinder specification sheet and brochure for color options.

5. The color of the electrical cable matches the color specified for the Track Adapter.